

WQ

**50Hz
Submersible
Sewage Pump**



Stock code:300145




Content

| | |
|--|----|
| New III generation submersible sewage pump | 1 |
| Product Summary | 2 |
| Application | 3 |
| Working conditions | 3 |
| Definition of model | 3 |
| Installation type | 4 |
| Coupling device dimensions and pump outlet flange dimension | 5 |
| Relevant dimensions | 5 |
| Light Coupling device dimensions and pump outlet flange dimension | 6 |
| Relevant dimensions | 6 |
| WQ(II) type submersible sewage pump(2-pole motor) | 7 |
| WQ(I) type submersible sewage pump(4-pole motor) | 8 |
| WQ(I) type submersible sewage pump(4,6,8-pole motor) | 9 |
| WQ(I) type submersible sewage pump(4,6-pole motor) | 10 |
| WQ(III) type submersible sewage pump(2-pole motor hot temperature pump) | 11 |
| WQ(I) type submersible sewage pump(Introduction of high-resistance pump) | 12 |
| Technical data and dimensions(2-pole motor) | 13 |
| Technical data and dimensions(4,6,8-pole motor) | 14 |
| Technical data and dimensions(2-pole single phase motor) | 16 |
| Technical data and dimensions(4,6-pole 90-150kW motor) | 16 |
| Performance curve | 17 |
| WQ-JY(I) type submersible sewage pump | 28 |
| Technical data and dimensions | 29 |
| Performance curve | 31 |
| WQ-QG(I) cutting type submersible sewage pump | 34 |
| Technical data and dimensions | 35 |
| Performance curve | 36 |
| WQ-W(I) non-clogging cutting type submersible sewage pump | 37 |
| Technical data and dimensions | 38 |
| Performance curve | 39 |
| WQ-X(I) series vortex type submersible sewage pump | 42 |
| Technical data and dimensions | 43 |
| Performance curve | 43 |

Content

| | |
|--|----|
| WQ-H(I) high head large solid passing submersible pump | 44 |
| Technical data and dimensions | 45 |
| Performance curve | 45 |
| SHP type submersible sewage pump | 46 |
| Technical data and dimensions | 47 |
| Performance curve | 47 |
| Coupling installation and pump outlet flange dimension | 48 |
| Relevant dimensions | 48 |
| Installation methods of small-flow high-head pump | 49 |
| Table of pump models and oil capacities | 50 |
| Summary | 50 |
| Product features | 50 |
| Operation condition and installation condition | 51 |
| Power requirement | 51 |
| Definition of model | 51 |
| Supply range | 51 |
| Ordering Instructions | 51 |

New III generation submersible sewage pump

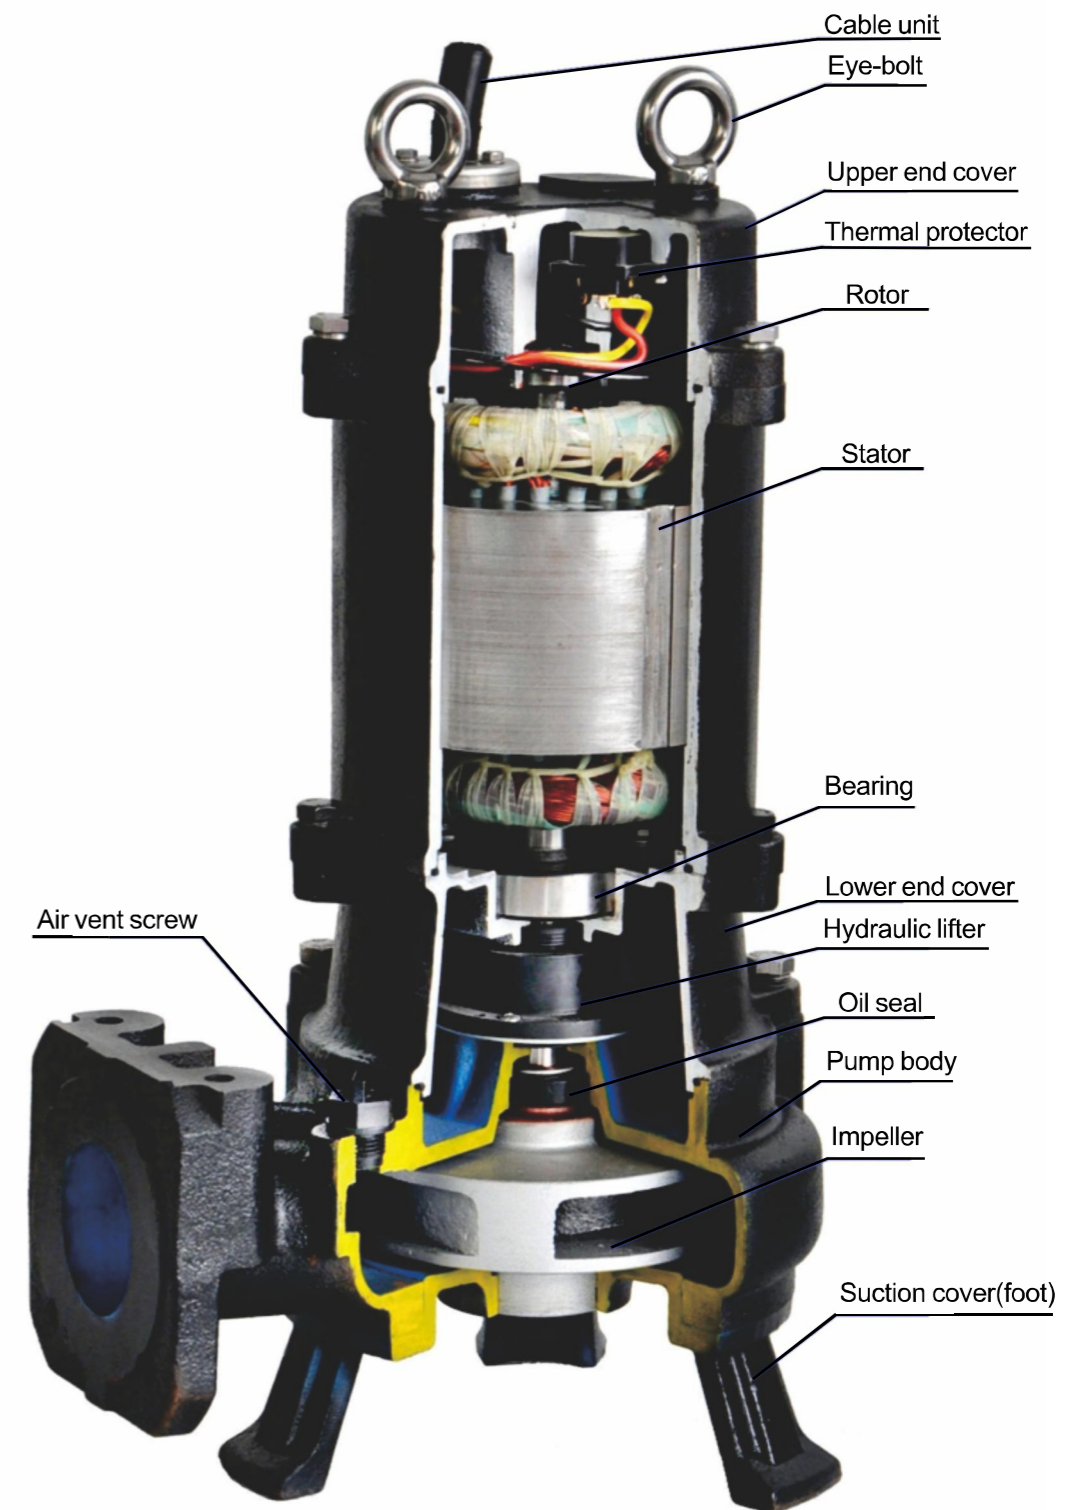

Product Summary

WQ(I) series new III generation submersible sewage pump has the following features:

1. The special cable production process can prevent water leak to motor cabinet when cable cover is broken or the front of cable is submersed.

2. Specially designed submersible motor with the protection level of IPX8, insulation class F. The a lowed temperature rise is high, submerged cooling effect is good, the actual temperature rise is low, motor insulation life is long, it ensures that the motor can automatically cut off the power supply in abnormal condition.

3. The product is fitted with outside frame works oil seal and double-mechanical seal. The hydraulic lifter which is installed inside oil chamber ensures the lubrication of mechanical seal when the oi level is low. Prolong the service life of the seal, the sealing performance is more reliable, effectively ensuring the continuous safe operation of product. (This kind of technology is a patent of Tsurumi Pump)

4. An automatic air release valve is designed at the pump outlet, eliminating the need for tedious manual venting. During operation, the pump can automatically discharge internal air to ensure normal water discharge, effectively preventing operational failures caused by air accumulation in the pump.

5. The impeller adopts semi-closed and open shape of double-channel design. Because of symmetric channel, it is well balanced, stable running, small vibration, long service life and energy saving.




Application

- Sewage water treatment system for construction, industrial enterprises, municipal projects, etc.
- Drainage, waste water treatment for city environmental protection system.
- Prospecting, mining, etc.
- Irrigation, fen, aquaculture, fountain, etc.

Working conditions


- Power Supply: 50Hz, 3x380V;
- Medium temperature shall less than 40°C, pH value is between 4 to 10. Medium density shall less than 1200kg/m³, solid and liquid ratio shall less than 2%.
- The lowest liquid level shall in conform to the lowest liquid in the size dimension.
- The pump is not suitable for strong corrosive fluids or strong corrosive solid.
- The so id diameter in the medium shall not exceed the maximum allowed solid diameter.

Definition of model

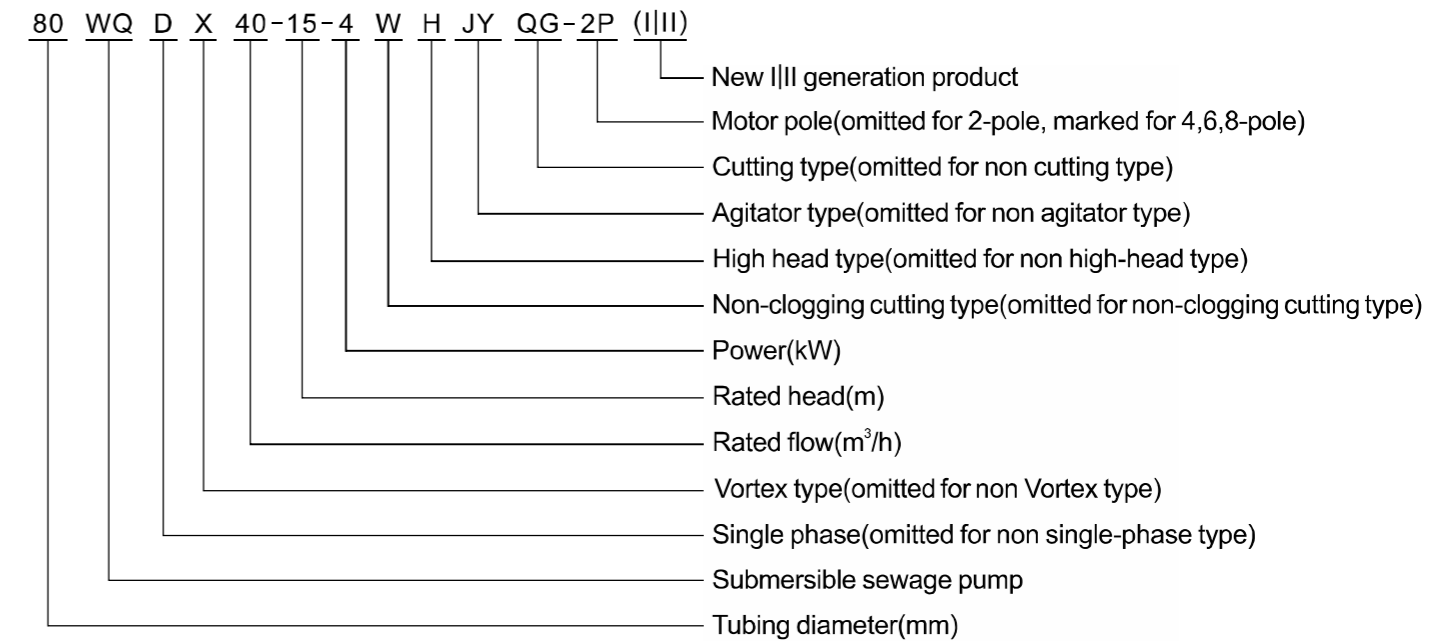

Installation type

Fixed auto coupling device installation

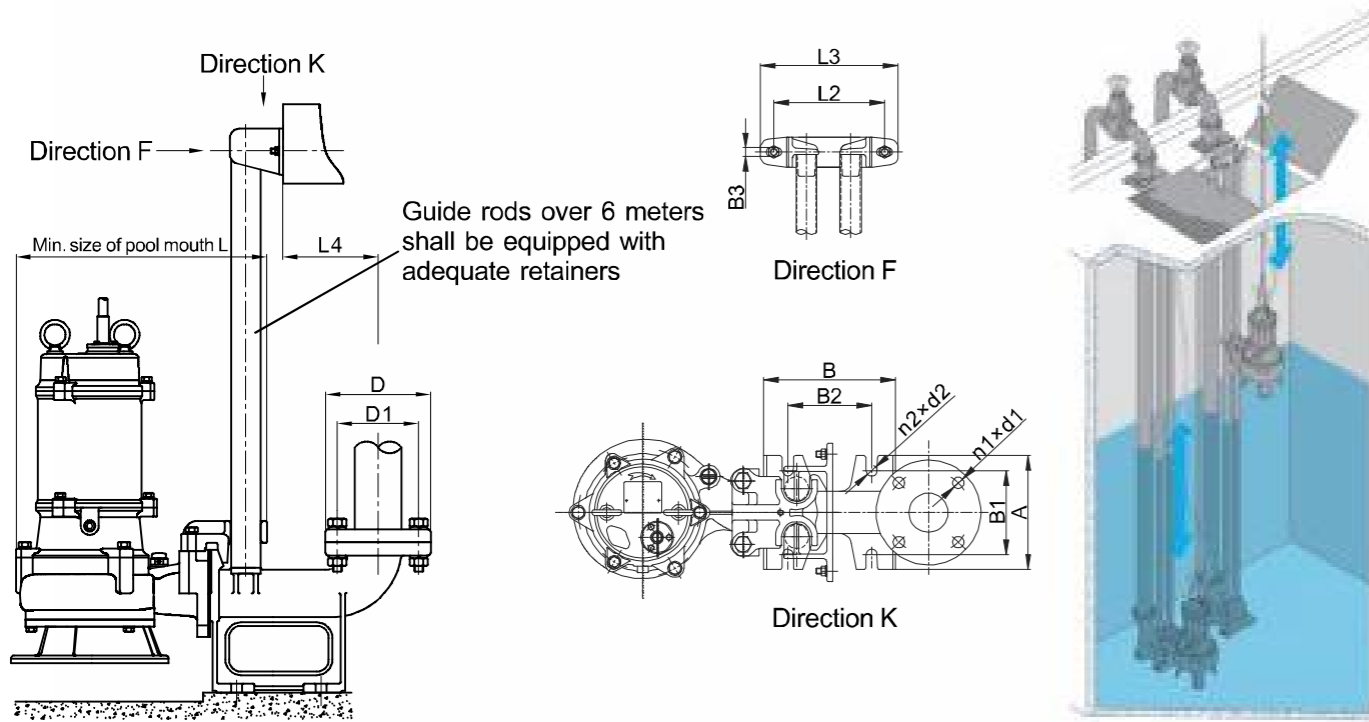

Coupling device dimensions and pump outlet flange dimension

(refer to page 4 for size remark details)


Measure:mm

| No. | Diameter | Flange connection size | | | | Coupling base dimension | | | | | | L | L1 | L2 | L3 | L4 |
|-----|----------------|------------------------|-----|--------|--------|-------------------------|------|-----|-----|-------|-------|------|-----|-----|------|-----|
| | | D | D1 | n1×d1 | n1×Md | A | B | B1 | B2 | B3 | n2×d2 | | | | | |
| 1 | DN40 | 130 | 100 | 4-Ø14 | 4-M12 | 140 | 149 | 100 | 95 | 2-Ø14 | 4-Ø18 | 400 | 73 | 185 | 230 | 57 |
| 2 | DN50 | 140 | 110 | 4-Ø14 | 4-M12 | 160 | 200 | 120 | 120 | 2-Ø14 | 4-Ø18 | 400 | 60 | 185 | 230 | 175 |
| 3 | DN65 | 160 | 130 | 4-Ø14 | 4-M12 | 190 | 220 | 140 | 140 | 2-Ø14 | 4-Ø18 | 415 | 75 | 195 | 230 | 130 |
| 4 | DN80 | 190 | 150 | 4-Ø18 | 4-M16 | 220 | 250 | 170 | 170 | 2-Ø14 | 4-Ø18 | 415 | 75 | 195 | 230 | 165 |
| 5 | DN100 | 210 | 170 | 4-Ø18 | 4-M16 | 250 | 290 | 200 | 200 | 2-Ø15 | 4-Ø18 | 480 | 114 | 245 | 300 | 176 |
| 6 | DN150 (TOS150) | 265 | 225 | 8-Ø18 | 8-M16 | 400 | 410 | 300 | 300 | 3-Ø15 | 4-Ø24 | 925 | 190 | 260 | 380 | 190 |
| 7 | DN150 (TO150) | 265 | 225 | 8-Ø19 | 8-M16 | 400 | 410 | 300 | 300 | 3-Ø15 | 4-Ø24 | 1048 | 220 | 260 | 380 | 160 |
| 8 | DN200 | 320 | 280 | 8-Ø19 | 8-M16 | 400 | 450 | 300 | 350 | 3-Ø15 | 4-Ø24 | 1048 | 200 | 260 | 380 | 229 |
| 9 | DN250 | 375 | 335 | 12-Ø19 | 12-M16 | 460 | 560 | 360 | 430 | 3-Ø15 | 4-Ø24 | 1078 | 200 | 280 | 380 | 300 |
| 10 | DN300 | 440 | 395 | 12-Ø23 | 12-M20 | 600 | 630 | 500 | 470 | 3-Ø18 | 4-Ø28 | 1205 | 270 | 400 | 700 | 300 |
| 11 | DN350 | 490 | 445 | 12-Ø23 | 12-M20 | 640 | 650 | 520 | 470 | 4-Ø23 | 4-Ø28 | 1267 | 270 | 400 | 700 | 330 |
| 12 | DN400 | 565 | 515 | 16-Ø26 | 16-M24 | 750 | 960 | 600 | 650 | 4-Ø23 | 4-Ø35 | 1387 | 280 | 840 | 930 | 650 |
| 13 | DN500 | 675 | 620 | 20-Ø26 | 20-M24 | 1000 | 1100 | 800 | 800 | 4-Ø23 | 4-Ø42 | 1872 | 290 | 990 | 1100 | 601 |

※ When coupling installed, foot bracket is not included in coupling installation for 2-pole, 5.5KW cutting type pump, and other 4-pole pumps with motor power of 4kW and above.

Flange pressure is PN1.0MPa for DN400 & Dn500. For all other sizes, the pressure is PN0.6MPa.

Movable installation

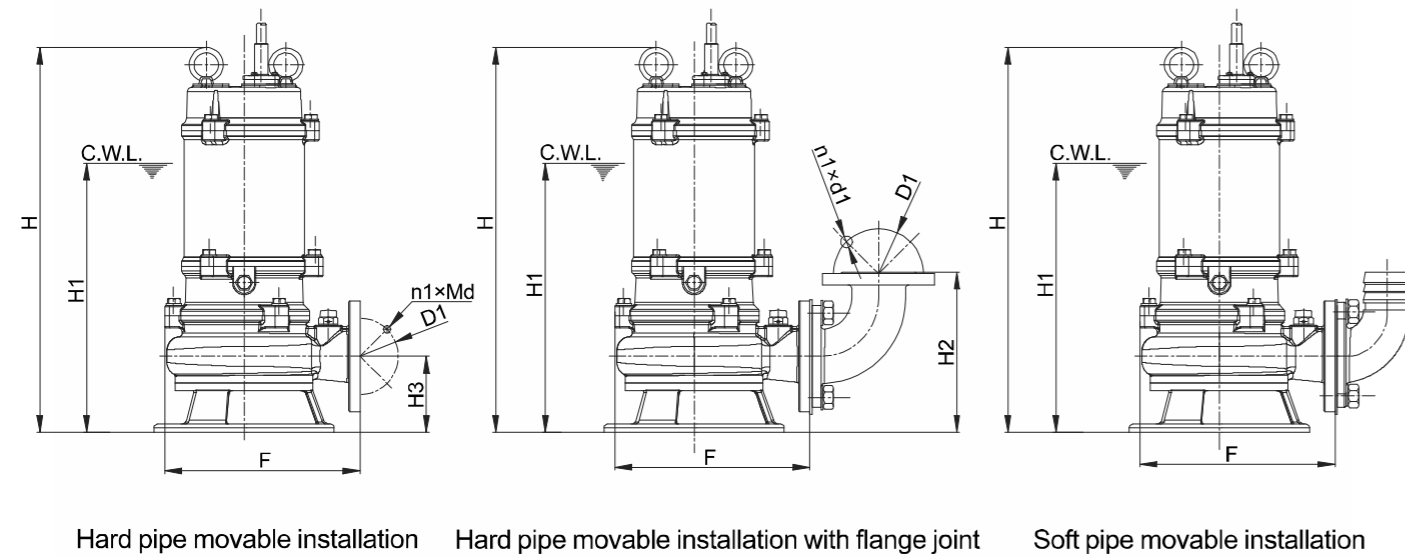

※ C.W.L.: The lowest water level when continuous operating.

Relevant dimensions

Measure:mm(except for inch)

| Item | Diameter | | | | | | | | | | | | | |
|--|----------------|----------------|-------------------|----------------|----------------------------|-----------------------------|-------------------------|-------------------------|-------------|----------------|---------------|----------------|-----------------|-------|
| | DN40 | DN50 | DN65 | DN80 | DN100 TOS-100 | DN100 TOS-100F | DN150 (TOS150) | DN150 (TO150) | DN200 | DN250 | DN300 | DN350 | DN400 | DN500 |
| Guide rod size | 1"/33×3.0 DN25 | | 1.25"/42×3.0 DN32 | | 2"/60×3.25 DN50 | | | 1.5"/48×3.25 DN40 | | 2.5"/75×4 DN65 | | 4"/114×4 DN100 | | |
| Guide rod length | pool depth 245 | pool depth 285 | pool depth 300 | pool depth 320 | pool depth 365 | | | pool depth 100 | | pool depth 150 | pool depth 70 | pool depth 870 | pool depth 1120 | |
| Quantity of expansion bolt and specification | 2-M10×120 | | | | 2-M12×125 | | | | 2-M12×125 | 2-M16×150 | 3-M16×150 | 4-M20×200 | | |
| Quantity of bolt and specification | 4-M16×250 | | | | 4-M20×300 | | | | 4-M24×350 | 4-M24×350 | 4-M30×400 | 4-M39×400 | | |
| Footer bolt hole size | 80×80×300 | | | | 100×100×350 | | | | 120×120×400 | 120×120×400 | 120×120×400 | 150×150×450 | | |
| Dia.of soft pipe (using scope) | DN40 | DN50 | DN65 | DN80 | DN100 using scope 2.2~15kW | DN100 using scope 18.5~22kW | DN150 using scope ≤22kW | DN150 using scope ≥30kW | DN200 | DN250 | DN300 | DN350 | DN400 | DN500 |

Light Coupling device dimensions and pump outlet flange dimension

(refer to page 4 for size remark details)

(fit for 6P/8P-22-75kW, DN350-500 pump)

Measure:mm

| No. | Diameter | Flange connection size | | | | Coupling base dimension | | | | | | L | L1 | L2 | L3 | L4 |
|-----|----------|------------------------|-----|--------|--------|-------------------------|-----|-----|-----|-------|-------|------|-----|-----|-----|-----|
| | | D | D1 | n1×d1 | n1×Md | A | B | B1 | B2 | B3 | n2×d2 | | | | | |
| 1 | DN350 | 510 | 445 | 12-Ø22 | 12-M20 | 588 | 617 | 420 | 402 | 3-Ø16 | 4-Ø26 | 1252 | 173 | 325 | 500 | 321 |
| 2 | DN400 | 565 | 515 | 16-Ø26 | 16-M24 | 618 | 663 | 490 | 510 | 3-Ø16 | 4-Ø26 | 1240 | 187 | 325 | 500 | 368 |
| 3 | DN500 | 673 | 620 | 20-Ø26 | 20-M24 | 743 | 751 | 570 | 550 | 3-Ø20 | 4-Ø34 | 1800 | 200 | 660 | 745 | 449 |

Foot bracket is not included in coupling installation for DN350-DN500 pump.
Pressure grade is PN0.6MPa for DN350 flange, and PN1.0MPa for DN400 and DN500 flange.

Relevant dimensions

Measure: mm(except for inch)

| Item | Diameter | | |
|--|--------------------|--------------------|-------------------|
| | DN350 | DN400 | DN500 |
| Guide rod size | 2"/60×3.25 DN50 | 2"/60×3.25 DN50 | 2.5"/75×4 DN65 |
| Guide rod length | pool depth-715 | pool depth-815 | pool depth-918 |
| Quantity of expansion bolt and specification | 3-M14×150 | 3-M14×150 | 3-M18×200 |
| Quantity of bolt and specification | 4-M24×350 | 4-M24×350 | 4-M30×400 |
| Footer bolt hole size | 120×120×400 | 120×120×400 | 150×150×450 |
| Dia.of soft pipe (using scope) | DN350 | DN400 | DN500 |


Please consult pre-sales technician for specific model and its installation drawing.

WQ(II) type submersible sewage pump

Sectional drawing of sewage pump with 2-pole motor

WQ(II)type


0.55~15kW

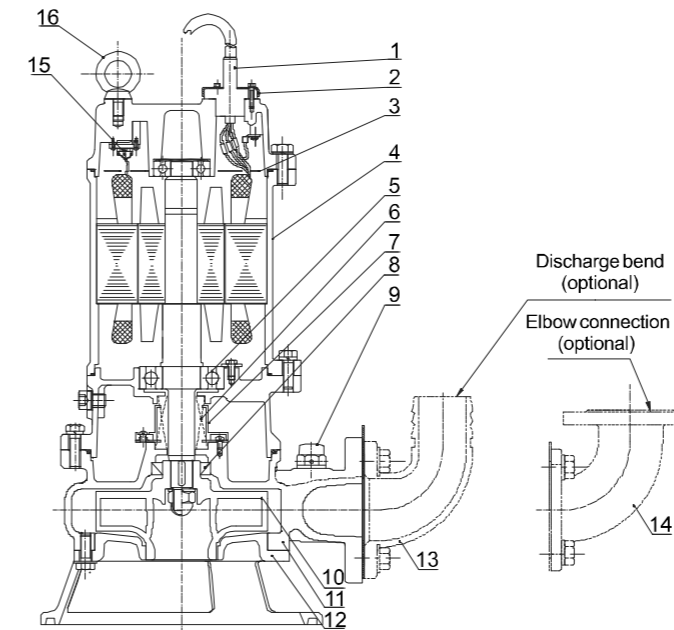

| No. | Name | Material |
|-----|-----------------------------|--|
| 1 | Cable | YZW |
| 2 | Cable gland | / |
| 3 | Threading board | / |
| 4 | Electric motor | / |
| 5 | Bearing | / |
| 6 | Mechanical seal | Graphite/SIC SIC/SIC+C |
| 7 | Oil lifter | / |
| 8 | Oil seal | NBR1-2 |
| 9 | Air vent screw | Resin/others |
| 10 | Impeller | HT200 |
| 11 | Casing | HT200 |
| 12 | Suction cover | Cast iron |
| 13 | Discharge bend (optional) | 50-100(Engineering plastic) 32-300(HT200) |
| 14 | Elbow connection (optional) | HT200 |
| 15 | Thermal protector | / |
| 16 | Eye-bolt | / |

WQ(I) type submersible sewage pump


Sectional drawing of sewage pump with 4-pole motor

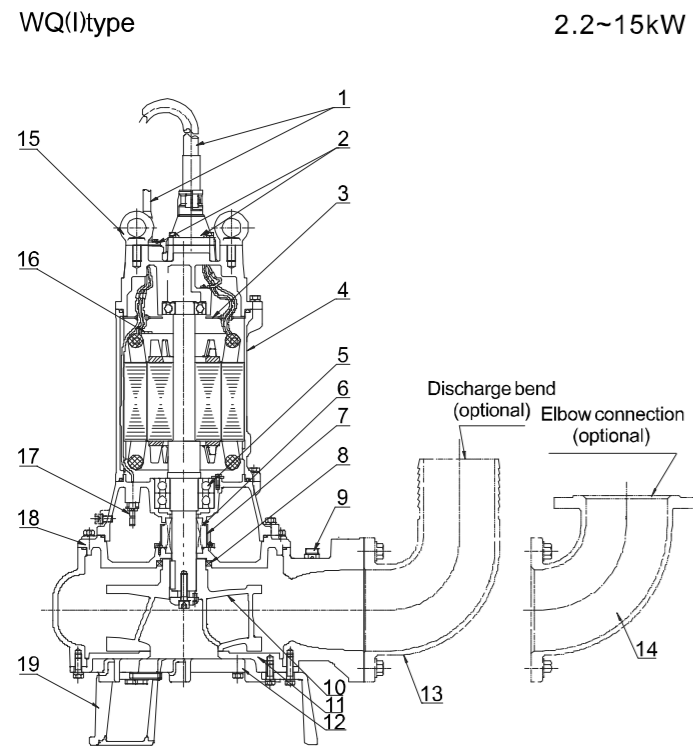


| No. | Name | Material |
|-----|--|--|
| 1 | Cable | YZW |
| 2 | Cable gland | / |
| 3 | Threading board | / |
| 4 | Electric motor | / |
| 5 | Bearing | / |
| 6 | Mechanical seal | Graphite/SIC SIC/SIC+C |
| 7 | Oil lifter | / |
| 8 | Oil seal | NBR1-2 |
| 9 | Air vent screw | Resin/others |
| 10 | Impeller | HT200 |
| 11 | Casing | HT200 |
| 12 | Suction cover | HT200 |
| 13 | Discharge bend (optional) | 50-100(Engineering plastic) 32-300(HT200) |
| 14 | Elbow connection (optional) | HT200 |
| 15 | Eye-bolt | / |
| 16 | Thermal protector | / |
| 17 | Leak sensor electrode bar (above 11kw) | / |
| 18 | Casing top cover | HT200 |
| 19 | Foot support | Cast iron |

WQ(I) type submersible sewage pump

Sectional drawing of sewage pump with 4,6,8-pole motor

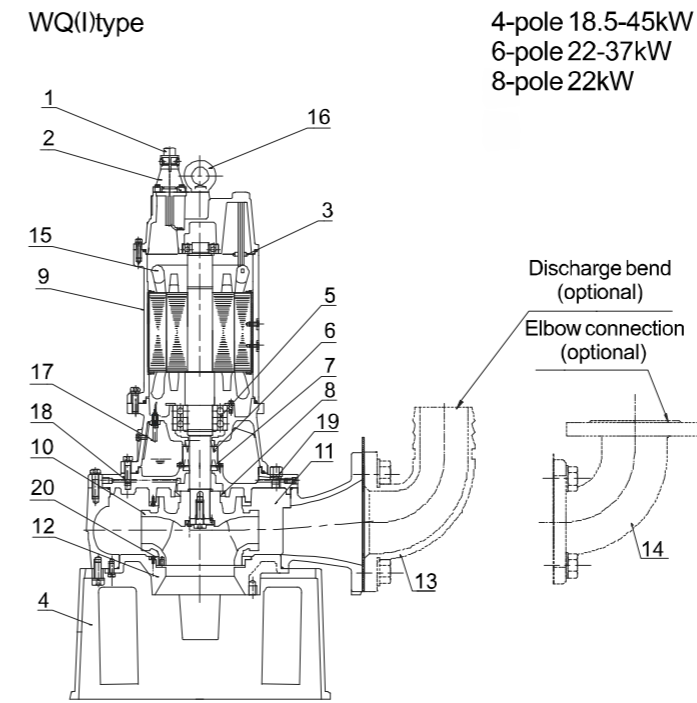

| No. | Name | Material |
|-----|--|---------------------------|
| 1 | Cable | YCW |
| 2 | Cable gland | HT200 |
| 3 | Threading board | Q235 |
| 4 | Filter bracket | QT600 |
| 5 | Bearing | / |
| 6 | Mechanical seal | Graphite/SIC SIC/SIC+C |
| 7 | Oil lifter | / |
| 8 | Oil seal | NBR1-2 |
| 9 | Base | HT200 |
| 10 | Impeller | HT200 |
| 11 | Casing | HT200 |
| 12 | Suction cover | HT200 |
| 13 | Discharge bend (optional) | HT200 |
| 14 | Discharge bend (optional) | HT200 |
| 15 | Mini-thermal protector | / |
| 16 | Eye-bolt | 45#Galvanized |
| 17 | Leak sensor electrode bar (above 11kw) | / |
| 18 | Casing top cover | HT200 |
| 19 | Air vent nut | 304 |
| 20 | Neck ring | HT200 |
| 21 | Water isolation cover | Q235 |

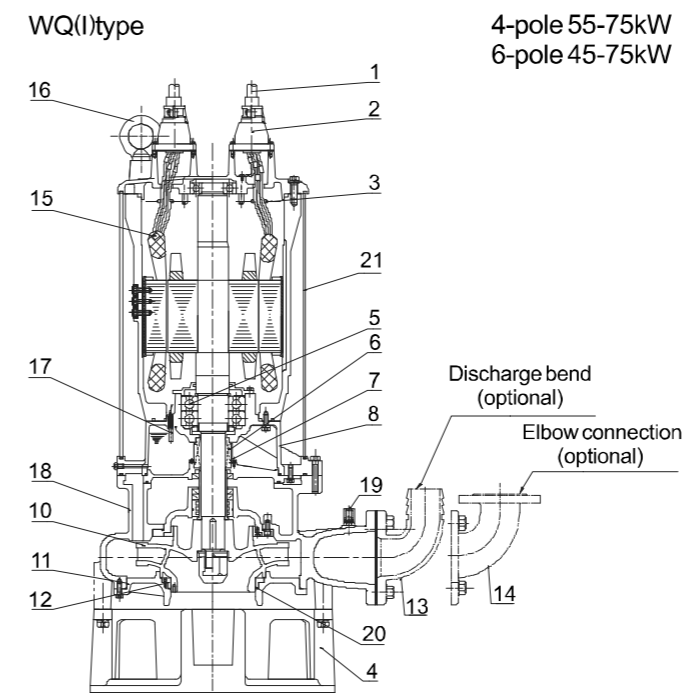


WQ(I) type submersible sewage pump

Sectional drawing of submersible pump with 4,6-pole motor

WQ(I)type

90kW~150kW

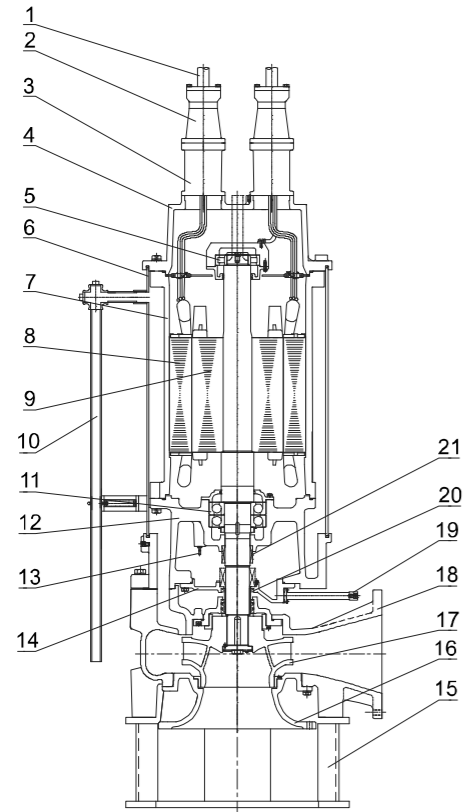


| No. | Name | Material |
|-----|---------------------------|---------------------|
| 1 | Cable | YZW |
| 2 | Cable guard | HT200 |
| 3 | Junction box | HT200 |
| 4 | Uppercover | HT200 |
| 5 | Upperbearing | Imported NSK |
| 6 | Water-resisting cover | Q235 |
| 7 | Base | HT200 |
| 8 | Stator with wire | / |
| 9 | Rotor with shaft | / |
| 10 | Cooling water pipe | 304 |
| 11 | Lower bearing | Imported NSK |
| 12 | Lower cover | HT200 |
| 13 | Leak sensor electrode bar | / |
| 14 | Casing top cover | HT200 |
| 15 | Foot support | Q235 |
| 16 | Suction cover | HT200 |
| 17 | Impeller | HT200 |
| 18 | Pump body | HT200 |
| 19 | Oil drain pipe | 304 |
| 20 | Framework seal | NBR1-2 |
| 21 | Mechanical seal | Imported from Japan |

WQ(I/II) type submersible sewage pump

Sectional drawing of 2-pole motor hot temperature pump(medium temperature:40-80°C)

WQ(I)type
WQ(II)type

0.37kW~15kW

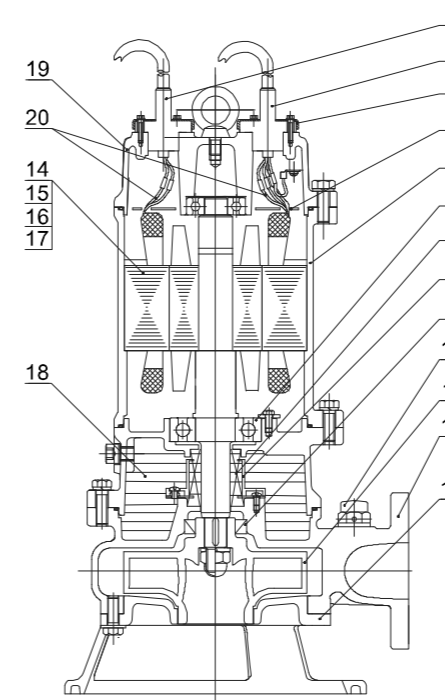

All pumps with 2-pole motor can be referred.


| No. | Name | Material |
|-----|---------------------------|--|
| 1 | Signal cable | Rubber submersible cable |
| 2 | Main cable | Rubber submersible cable |
| 3 | Cable guard | / |
| 4 | Threading board | / |
| 5 | Motor | / |
| 6 | Bearing | Special high temperature bearing |
| 7 | Mechanical seal | Customized special high temperature mechanical sea |
| 8 | Oil lifter | / |
| 9 | Framework seal | Fluorine rubber |
| 10 | Air vent screw | Resin |
| 11 | Impeller | HT200 |
| 12 | Pump body | HT200 |
| 13 | Inlet cover | HT200 |
| 14 | Varnished wire | High-temperature resistant varnished wire |
| 15 | Slot wedge | High-temperature resistant slot wedge |
| 16 | Thermal protector | High-temperature resistant micro thermal protector |
| 17 | Insulation paper | High-temperature Resistant insulation paper |
| 18 | Lubrication oil | 46#Turbine oil |
| 19 | Top cover (LB processing) | HT200 |
| 20 | Fixture wire | High-temperature resistant fixture wire |

WQ(I) type submersible sewage pump

Introduction of high-resistance pump

1. Wear-resisting pump

The structure adopts several framework seal rings to prevent sediment and other things from entering the pump interior. Wear-resistant material is used to increase the strength and hardness of the pump.

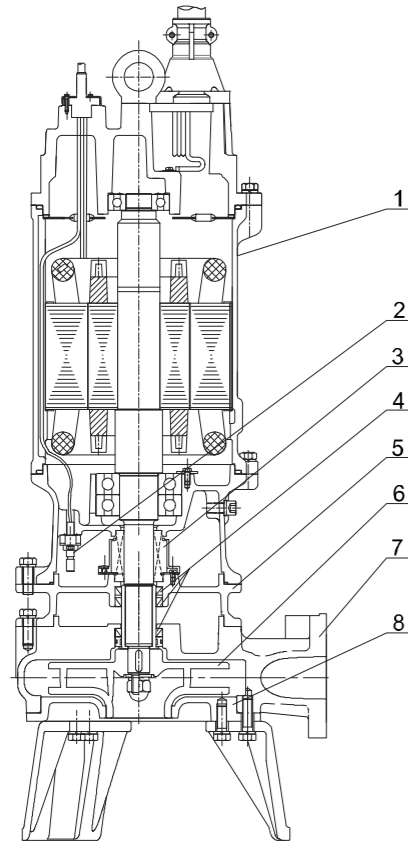

Present models: 65WQ40-50-11(I)
150WQ150-24-18.5(I)

| No. | Name | Material |
|-----|--------------------|---|
| 1 | Motor | / |
| 2 | Immersed electrode | / |
| 3 | Mechanical seal | Customized wear-resistant mechanical seal |
| 4 | Framework seal | NBR |
| 5 | Casing top cover | Wear-resistant material |
| 6 | Impeller | Wear-resistant material |
| 7 | Pump body | Wear-resistant material |
| 8 | Inlet cove | Wear-resistant material |

2. Stainless steel impeller pump

Compared with cast iron impeller, 304 impeller cast by low temperature wax casting aluminum abrasive tools has the characteristics of corrosion resistance and higher efficiency, which can be applied to some corrosion-resistant medium places.

Technical data and dimensions(2-pole motor)

WQ(II) type submersible sewage pump

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max. Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|---------------------|------|---------------------|-----|-------|-------|---------------|---------------|----------------------------|--------|----------------|-----|-----|-----|-----|----------|
| | (mm) | (m ³ /h) | (m) | (rpm) | (kw) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | H3 | F | |
| 40WQ10-7-0.55(II) | 40 | 10 | 7 | 2850 | 0.55 | 380 | 1.3 | 20 | 21 | 432 | 319 | 187 | 97 | 238 | TOS40 |
| 50WQ10-7-0.55(II) | 50 | 10 | 7 | 2850 | 0.55 | 380 | 1.3 | 20 | 21 | 432 | 319 | 207 | 97 | 238 | TOS50 |
| 40WQ12-10-0.75(II) | 40 | 12 | 10 | 2850 | 0.75 | 380 | 1.8 | 20 | 22.5 | 432 | 319 | 187 | 97 | 238 | TOS40 |
| 50WQ12-10-0.75(II) | 50 | 12 | 10 | 2850 | 0.75 | 380 | 1.8 | 20 | 22.5 | 432 | 319 | 207 | 97 | 238 | TOS50 |
| 40WQ15-13-1.1(II) | 40 | 15 | 13 | 2850 | 1.1 | 380 | 2.6 | 20 | 24 | 432 | 319 | 187 | 97 | 238 | TOS40 |
| 50WQ8-16-1.1(II) | 50 | 8 | 16 | 2850 | 1.1 | 380 | 2.6 | 20 | 26.5 | 440 | 348 | 214 | 104 | 265 | TOS50 |
| 65WQ25-8-1.1(II) | 65 | 25 | 8 | 2850 | 1.1 | 380 | 2.6 | 25 | 29 | 443 | 351 | 226 | 106 | 261 | TOS65 |
| 40WQ12-18-1.5(II) | 40 | 12 | 18 | 2880 | 1.5 | 380 | 3.3 | 20 | 32 | 472 | 357 | 195 | 105 | 275 | TOS40 |
| 50WQ12-18-1.5(II) | 50 | 12 | 18 | 2880 | 1.5 | 380 | 3.3 | 20 | 32 | 472 | 357 | 215 | 105 | 275 | TOS50 |
| 65WQ25-10-1.5(II) | 65 | 25 | 10 | 2880 | 1.5 | 380 | 3.3 | 25 | 33 | 481 | 366 | 231 | 111 | 286 | TOS65 |
| 50WQ15-20-2.2(II) | 50 | 15 | 20 | 2880 | 2.2 | 380 | 4.6 | 20 | 38 | 511 | 402 | 217 | 107 | 279 | TOS50 |
| 65WQ25-15-2.2(II) | 65 | 25 | 15 | 2880 | 2.2 | 380 | 4.6 | 25 | 41 | 522 | 414 | 230 | 110 | 287 | TOS65 |
| 80WQ40-10-2.2(II) | 80 | 40 | 10 | 2880 | 2.2 | 380 | 4.6 | 25 | 43 | 545 | 436 | 256 | 121 | 296 | TOS80 |
| 100WQ50-9-2.2(II) | 100 | 50 | 9 | 2880 | 2.2 | 380 | 4.6 | 30 | 42 | 545 | 436 | 271 | 121 | 323 | TOS100 |
| 50WQ15-25-3(II) | 50 | 15 | 25 | 2840 | 3 | 380 | 6.1 | 25 | 45 | 521 | 412 | 218 | 108 | 294 | TOS50 |
| 50WQ25-20-3(II) | 50 | 25 | 20 | 2840 | 3 | 380 | 6.1 | 25 | 45 | 521 | 412 | 218 | 108 | 294 | TOS50 |
| 65WQ25-18-3(II) | 65 | 25 | 18 | 2840 | 3 | 380 | 6.1 | 25 | 48 | 523 | 415 | 227 | 107 | 291 | TOS65 |
| 80WQ35-13-3(II) | 80 | 35 | 13 | 2840 | 3 | 380 | 6.1 | 35 | 49 | 546 | 437 | 256 | 121 | 300 | TOS80 |
| 100WQ60-9-3(II) | 100 | 60 | 9 | 2840 | 3 | 380 | 6.1 | 35 | 50 | 546 | 437 | 271 | 121 | 314 | TOS100 |
| 50WQ15-33-4(II) | 50 | 15 | 33 | 2840 | 4 | 380 | 7.7 | 20 | 51 | 554 | 438 | 220 | 110 | 338 | TOS50 |
| 65WQ20-25-4(II) | 65 | 20 | 25 | 2840 | 4 | 380 | 7.7 | 25 | 52.5 | 563 | 447 | 235 | 115 | 336 | TOS65 |
| 80WQ40-19-4(II) | 80 | 40 | 19 | 2840 | 4 | 380 | 7.7 | 30 | 54.5 | 570 | 454 | 253 | 118 | 340 | TOS80 |
| 100WQ100-9-4(II) | 100 | 100 | 9 | 2840 | 4 | 380 | 7.7 | 35 | 57 | 590 | 474 | 284 | 134 | 349 | TOS100 |
| 50WQ20-40-5.5(II) | 50 | 20 | 40 | 2940 | 5.5 | 380 | 10.8 | 20 | 78.5 | 666 | 528 | 232 | 122 | 360 | TOS50 |
| 65WQ25-31-5.5(II) | 65 | 25 | 31 | 2940 | 5.5 | 380 | 10.8 | 25 | 83.5 | 675 | 537 | 244 | 124 | 370 | TOS65 |
| 80WQ40-24-5.5(II) | 80 | 40 | 24 | 2940 | 5.5 | 380 | 10.8 | 30 | 82.5 | 687 | 549 | 266 | 131 | 360 | TOS80 |
| 100WQ65-15-5.5(II) | 100 | 65 | 15 | 2940 | 5.5 | 380 | 10.8 | 35 | 81 | 702 | 565 | 295 | 145 | 354 | TOS100 |
| 150WQ100-11-5.5(II) | 150 | 100 | 11 | 2940 | 5.5 | 380 | 10.8 | 40 | 97 | 717 | 579 | 364 | 154 | 426 | TOS150 |
| 50WQ20-46-7.5(II) | 50 | 20 | 46 | 2940 | 7.5 | 380 | 14.3 | 20 | 96 | 811 | 567 | 234 | 124 | 360 | TOS50 |
| 65WQ25-39-7.5(II) | 65 | 25 | 39 | 2940 | 7.5 | 380 | 14.3 | 25 | 97 | 807 | 563 | 244 | 124 | 370 | TOS65 |
| 80WQ40-31-7.5(II) | 80 | 40 | 31 | 2940 | 7.5 | 380 | 14.3 | 30 | 96 | 819 | 575 | 266 | 131 | 360 | TOS80 |
| 100WQ65-20-7.5(II) | 100 | 65 | 20 | 2940 | 7.5 | 380 | 14.3 | 35 | 98 | 832 | 588 | 297 | 147 | 390 | TOS100 |
| 150WQ100-17-7.5(II) | 150 | 100 | 17 | 2940 | 7.5 | 380 | 14.3 | 40 | 110.5 | 849 | 605 | 364 | 154 | 426 | TOS150 |
| 65WQ40-44-11(II) | 65 | 40 | 44 | 2930 | 11 | 380 | 21.7 | 30 | 130.5 | 927 | 645 | 316 | 196 | 377 | TOS65 |
| 80WQ70-33-11(II) | 80 | 70 | 33 | 2930 | 11 | 380 | 21.7 | 35 | 130 | 934 | 652 | 337 | 202 | 399 | TOS80 |
| 100WQ90-29-11(II) | 100 | 90 | 29 | 2930 | 11 | 380 | 21.7 | 35 | 130.5 | 938 | 656 | 355 | 205 | 413 | TOS100 |
| 65WQ50-53-15(II) | 65 | 50 | 53 | 2930 | 15 | 380 | 29.1 | 30 | 138.5 | 927 | 670 | 316 | 196 | 377 | TOS65 |
| 80WQ80-40-15(II) | 80 | 80 | 40 | 2930 | 15 | 380 | 29.1 | 35 | 139 | 934 | 677 | 337 | 202 | 399 | TOS80 |
| 100WQ100-33-15(II) | 100 | 100 | 33 | 2930 | 15 | 380 | 29.1 | 35 | 138.5 | 938 | 681 | 355 | 205 | 413 | TOS100 |

Technical data and dimensions(4,6,8-pole motor)

WQ(I) type submersible sewage pump

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max.Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|-----------------------|------|--------|-----|-------|-------|---------------|---------------|---------------------------|--------|----------------|------|-----|-----|-------|----------|
| | (mm) | (m³/h) | (m) | (rpm) | (kw) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | H3 | |
| 80WQ36-10-2.2-4(I) | 80 | 36 | 10 | 1413 | 2.2 | 380 | 5 | 50 | 56 | 643 | 460 | 301 | 363 | 168.5 | TOS80 |
| 80WQ36-16-4-4(I) | 80 | 36 | 16 | 1413 | 4 | 380 | 8.4 | 35 | 67 | 692 | 555 | 301 | 375 | 168.5 | TOS80 |
| 80WQ60-11-4-4(I) | 80 | 60 | 11 | 1413 | 4 | 380 | 8.4 | 55 | 67 | 716 | 357 | 250 | 370 | 173.5 | TOS80 |
| 100WQ60-17-5.5-4(I) | 100 | 60 | 17 | 1437 | 5.5 | 380 | 11.5 | 40 | 132 | 908 | 670 | 432 | 453 | 222 | TOS100 |
| 100WQ60-20-7.5-4(I) | 100 | 60 | 20 | 1450 | 7.5 | 380 | 16.6 | 40 | 145 | 929 | 690 | 369 | 454 | 222 | TOS100 |
| 100WQ80-35-18.5-4(I) | 100 | 80 | 35 | 1460 | 18.5 | 380 | 36.9 | 27.5 | 305 | 1208 | 800 | 439 | 603 | 289 | TOS100F |
| 100WQ100-35-22-4(I) | 100 | 100 | 35 | 1460 | 22 | 380 | 43.1 | 35 | 310 | 1208 | 800 | 439 | 603 | 289 | TOS100F |
| 100WQ100-39-22-4(I) | 100 | 100 | 39 | 1460 | 22 | 380 | 43.1 | 35 | 310 | 1208 | 800 | 439 | 603 | 289 | TOS100F |
| 150WQ200-5-5.5-4(I) | 150 | 200 | 5 | 1460 | 5.5 | 380 | 11.5 | 70 | 156 | 1064 | 825 | 545 | 548 | 335 | TOS150 |
| 150WQ240-7-7.5-4(I) | 150 | 240 | 7 | 1450 | 7.5 | 380 | 16.6 | 70 | 156 | 1085 | 845 | 510 | 548 | 335 | TOS150 |
| 150WQ150-16-11-4(I) | 150 | 150 | 16 | 1440 | 11 | 380 | 22.9 | 52 | 216 | 1097 | 750 | 535 | 575 | 325 | TOS150 |
| 150WQ150-20-15-4(I) | 150 | 150 | 20 | 1440 | 15 | 380 | 30.6 | 57 | 237 | 1167 | 800 | 535 | 572 | 325 | TOS150 |
| 150WQ150-24-18.5-4(I) | 150 | 150 | 24 | 1460 | 18.5 | 380 | 36.9 | 45 | 292 | 1281 | 1030 | 530 | 620 | 320 | TOS150 |
| 150WQ180-20-18.5-4(I) | 150 | 180 | 20 | 1460 | 18.5 | 380 | 36.9 | 45 | 292 | 1281 | 1030 | 530 | 620 | 320 | TOS150 |
| 150WQ250-15-18.5-4(I) | 150 | 250 | 15 | 1460 | 18.5 | 380 | 36.9 | 45 | 292 | 1281 | 1030 | 530 | 620 | 320 | TOS150 |
| 150WQ150-27-22-4(I) | 150 | 150 | 27 | 1460 | 22 | 380 | 43.1 | 60 | 320 | 1281 | 880 | 530 | 575 | 320 | TOS150 |
| 150WQ180-25-22-4(I) | 150 | 180 | 25 | 1460 | 22 | 380 | 43.1 | 65 | 320 | 1281 | 880 | 530 | 575 | 320 | TOS150 |
| 150WQ200-22-22-4(I) | 150 | 200 | 22 | 1460 | 22 | 380 | 43.1 | 60 | 320 | 1281 | 880 | 530 | 575 | 320 | TOS150 |
| 150WQ270-16-22-4(I) | 150 | 270 | 16 | 1460 | 22 | 380 | 43.1 | 65 | 320 | 1273 | 860 | 530 | 575 | 320.5 | TOS150 |
| 150WQ200-28-30-4(I) | 150 | 200 | 28 | 1450 | 30 | 380 | 57.4 | 60 | 450 | 1513 | 1200 | 673 | 620 | 350 | TO150 |
| 150WQ150-35-37-4(I) | 150 | 150 | 35 | 1470 | 37 | 380 | 71.9 | 65 | 485 | 1567 | 1200 | 671 | 765 | 461 | TO150 |
| 150WQ200-35-37-4(I) | 150 | 200 | 35 | 1470 | 37 | 380 | 71.9 | 65 | 485 | 1567 | 1200 | 671 | 765 | 350 | TO150 |
| 150WQ200-45-55-4(I) | 150 | 200 | 45 | 1480 | 55 | 380 | 106.0 | 50 | 840 | 1663 | 1300 | 596 | 811 | 386.5 | TO150 |
| 150WQ270-40-55-4(I) | 150 | 270 | 40 | 1480 | 55 | 380 | 106.0 | 50 | 840 | 1663 | 1300 | 596 | 811 | 386.5 | TO150 |
| 200WQ270-10-11-4(I) | 200 | 270 | 10 | 1440 | 11 | 380 | 22.9 | 50 | 230 | 1113 | 760 | 530 | 568 | 335 | TO200 |
| 200WQ270-14-15-4(I) | 200 | 270 | 14 | 1440 | 15 | 380 | 30.6 | 35 | 255 | 1184 | 810 | 535 | 546 | 340 | TO200 |
| 200WQ250-15-18.5-4(I) | 200 | 250 | 15 | 1460 | 18.5 | 380 | 36.9 | 35 | 310 | 1281 | 880 | 530 | 575 | 335.5 | TO200 |
| 200WQ300-12-18.5-4(I) | 200 | 300 | 12 | 1460 | 18.5 | 380 | 36.9 | 63 | 310 | 1281 | 880 | 530 | 575 | 335.5 | TO200 |
| 200WQ270-16-22-4(I) | 200 | 270 | 16 | 1460 | 22 | 380 | 43.1 | 64 | 323 | 1281 | 880 | 530 | 575 | 335.5 | TO200 |
| 200WQ300-15-22-4(I) | 200 | 300 | 15 | 1450 | 22 | 380 | 43.1 | 60 | 323 | 1281 | 880 | 530 | 575 | 335.5 | TO200 |
| 200WQ400-10-22-4(I) | 200 | 400 | 10 | 1450 | 22 | 380 | 43.1 | 65 | 323 | 1281 | 880 | 530 | 575 | 335.5 | TO200 |
| 200WQ250-22-30-4(I) | 200 | 250 | 22 | 1450 | 30 | 380 | 57.4 | 60 | 565 | 1513 | 1200 | 673 | 620 | 463 | TO200 |
| 200WQ360-17-30-4(I) | 200 | 360 | 17 | 1450 | 30 | 380 | 57.4 | 65 | 565 | 1513 | 1200 | 673 | 620 | 463 | TO200 |
| 200WQ400-15-30-4(I) | 200 | 400 | 15 | 1450 | 30 | 380 | 57.4 | 60 | 565 | 1513 | 1200 | 673 | 620 | 463 | TO200 |
| 200WQ400-22-37-4(I) | 200 | 400 | 22 | 1470 | 37 | 380 | 71.9 | 65 | 580 | 1590 | 1200 | 673 | 813 | 463 | TO200 |
| 200WQ350-25-37-4(I) | 200 | 350 | 25 | 1470 | 37 | 380 | 71.9 | 60 | 580 | 1590 | 1200 | 673 | 813 | 463 | TO200 |
| 200WQ300-26-37-4(I) | 200 | 300 | 26 | 1470 | 37 | 380 | 71.9 | 50 | 580 | 1590 | 1200 | 673 | 813 | 463 | TO200 |
| 200WQ270-28-37-4(I) | 200 | 270 | 28 | 1470 | 37 | 380 | 71.9 | 50 | 580 | 1590 | 1200 | 673 | 813 | 463 | TO200 |
| 200WQ400-25-45-4(I) | 200 | 400 | 25 | 1470 | 45 | 380 | 87.0 | 40 | 650 | 1663 | 1300 | 650 | 811 | 432.5 | TO200 |
| 200WQ250-40-55-4(I) | 200 | 250 | 40 | 1480 | 55 | 380 | 106.0 | 40 | 850 | 1663 | 1300 | 650 | 811 | 386 | TO200 |
| 200WQ400-30-55-4(I) | 200 | 400 | 30 | 1480 | 55 | 380 | 106.0 | 40 | 850 | 1663 | 1300 | 650 | 811 | 386 | TO200 |

Technical data and dimensions(4,6,8-pole motor)

WQ(I) type submersible sewage pump

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max.Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|-----------------------|------|--------|-----|-------|-------|---------------|---------------|---------------------------|--------|----------------|------|------|------|-------|----------|
| | (mm) | (m³/h) | (m) | (rpm) | (kw) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | H3 | |
| 200WQ350-40-75-4(I) | 200 | 350 | 40 | 1480 | 75 | 380 | 142.0 | 40 | 919 | 1663 | 1300 | 650 | 811 | 386 | TO200 |
| 200WQ500-30-75-4(I) | 200 | 500 | 30 | 1480 | 75 | 380 | 142.0 | 40 | 865 | 1663 | 1300 | 650 | 811 | 386 | TO200 |
| 250WQ400-15-30-4(I) | 250 | 400 | 15 | 1460 | 30 | 380 | 57.4 | 45 | 485 | 1517 | 1250 | 750 | 815 | 490 | TO250 |
| 250WQ600-9-30-4(I) | 250 | 600 | 9 | 1460 | 30 | 380 | 57.4 | 45 | 485 | 1517 | 1250 | 750 | 815 | 490 | TO250 |
| 250WQ360-20-30-4(I) | 250 | 360 | 20 | 1460 | 30 | 380 | 57.4 | 45 | 485 | 1517 | 1250 | 750 | 815 | 490 | TO250 |
| 250WQ420-22-37-4(I) | 250 | 420 | 22 | 1470 | 37 | 380 | 71.9 | 62 | 550 | 1594 | 1200 | 750 | 820 | 490 | TO250 |
| 250WQ600-12-37-4(I) | 250 | 600 | 12 | 1470 | 37 | 380 | 71.9 | 62 | 550 | 1594 | 1200 | 750 | 820 | 490 | TO250 |
| 250WQ360-28-45-4(I) | 250 | 360 | 28 | 1470 | 45 | 380 | 87.0 | 45 | 685 | 1556 | 1200 | 695 | 829 | 432.5 | TO250 |
| 250WQ600-20-55-4(I) | 250 | 600 | 20 | 1450 | 55 | 380 | 106 | 60 | 865 | 1663 | 1300 | 740 | 900 | 430 | TO250 |
| 250WQ600-28-75-4(I) | 250 | 600 | 28 | 1480 | 75 | 380 | 142.0 | 60 | 930 | 1663 | 1300 | 740 | 895 | 430 | TO250 |
| 300WQ800-8-37-4(I) | 300 | 800 | 8 | 1450 | 37 | 380 | 75.0 | 60 | 620 | 1400 | 1150 | 779 | 800 | 514 | TO300 |
| 300WQ500-15-37-4(I) | 300 | 500 | 15 | 1450 | 37 | 380 | 75.0 | 60 | 620 | 1400 | 1150 | 779 | 800 | 514 | TO300 |
| 300WQ600-18-45-4(I) | 300 | 600 | 18 | 1470 | 45 | 380 | 87.0 | 60 | 690 | 1605 | 1250 | 825 | 881 | 514 | TO300 |
| 300WQ800-12-45-4(I) | 300 | 800 | 12 | 1470 | 45 | 380 | 87.0 | 60 | 690 | 1605 | 1250 | 825 | 881 | 514 | TO300 |
| 300WQ600-20-55-4(I) | 300 | 600 | 20 | 1450 | 55 | 380 | 106.0 | 55 | 865 | 1680 | 1120 | 775 | 870 | 466.5 | TO300 |
| 300WQ800-20-75-4(I) | 300 | 800 | 20 | 1450 | 75 | 380 | 142.0 | 60 | 956 | 1680 | 1120 | 775 | 870 | 466.5 | TO300 |
| 250WQ600-10-22-6(I) | 250 | 600 | 10 | 983 | 22 | 380 | 45 | 85 | 649 | 1654 | 1300 | 744 | 830 | 484 | TO250 |
| 300WQ700-8-22-6(I) | 300 | 700 | 8 | 983 | 22 | 380 | 45 | 66 | 658 | 1663 | 1300 | 802 | 830 | 492 | TO300 |
| 300WQ800-9-30-6(I) | 300 | 800 | 9 | 983 | 30 | 380 | 60 | 66 | 700 | 1663 | 1300 | 802 | 830 | 492 | TO300 |
| 300WQ800-11-37-6(I) | 300 | 800 | 11 | 983 | 37 | 380 | 74 | 50 | 729 | 1663 | 1300 | 802 | 830 | 492 | TO300 |
| 300WQ900-13-45-6(I) | 300 | 900 | 13 | 983 | 45 | 380 | 84 | 90 | 1039 | 1772 | 1470 | 772 | 878 | 462 | TO300 |
| 300WQ900-16-55-6(I) | 300 | 900 | 16 | 983 | 55 | 380 | 109 | 100 | 1093 | 1772 | 1470 | 772 | 878 | 462 | TO300 |
| 350WQ960-5.5-22-8(I) | 350 | 960 | 5.5 | 734 | 22 | 380 | 50 | 105 | 750 | 1703 | 1300 | 891 | 880 | 525 | TO350* |
| 350WQ960-7-30-6(I) | 350 | 960 | 7 | 983 | 30 | 380 | 60 | 100 | 741 | 1703 | 1300 | 891 | 880 | 525 | TO350* |
| 350WQ1100-8-37-6(I) | 350 | 1100 | 8 | 983 | 37 | 380 | 74 | 115 | 769 | 1703 | 1300 | 891 | 880 | 525 | TO350* |
| 400WQ1200-16-75-6(I) | 400 | 1200 | 16 | 983 | 75 | 380 | 138 | 100 | 1206 | 1817 | 1500 | 983 | 888 | 507 | TO400* |
| 400WQ1600-6.5-45-6(I) | 400 | 1600 | 6.5 | 983 | 45 | 380 | 84 | 125 | 1043 | 1793 | 1490 | 938 | 887 | 472 | TO400* |
| 400WQ1600-9-55-6(I) | 400 | 1600 | 9 | 983 | 55 | 380 | 109 | 105 | 1072 | 1793 | 1490 | 938 | 887 | 472 | TO400* |
| 500WQ2000-9-75-6(I) | 500 | 2000 | 9 | 983 | 75 | 380 | 138 | 120 | 1522 | 1926 | 1550 | 1153 | 1372 | 635 | TO500* |

※ For specific dimension, please contact sales for relevant outline dimension drawing.

* means that light coupling device can be adopted.

Technical data and dimensions(2-pole single phase motor)

WQ(I) type submersible sewage pump





| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max.Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|--------------------|------|--------|-----|-------|-------|---------------|---------------|---------------------------|--------|----------------|-----|-----|-----|-----|----------|
| | (mm) | (m³/h) | (m) | (rpm) | (kw) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | H3 | |
| 40WQD12-10-0.75(I) | 40 | 12 | 10 | 2875 | 0.75 | 220 | 4.4 | 15 | 23.5 | 486 | 320 | 183 | 238 | 93 | TOS40 |
| 40WQD12-18-1.5(I) | 40 | 12 | 18 | 2875 | 1.5 | 220 | 8.7 | 20 | 41 | 598 | 380 | 195 | 275 | 105 | TOS40 |
| 50WQD12-10-0.75(I) | 50 | 12 | 10 | 2875 | 0.75 | 220 | 4.4 | 15 | 23.5 | 486 | 320 | 203 | 238 | 93 | TOS50 |
| 50WQD12-18-1.5(I) | 50 | 12 | 18 | 2875 | 1.5 | 220 | 8.7 | 20 | 41 | 598 | 380 | 215 | 275 | 105 | TOS50 |
| 50WQD15-15-1.5(I) | 50 | 15 | 15 | 2875 | 1.5 | 220 | 8.7 | 20 | 41 | 602 | 385 | 217 | 278 | 107 | TOS50 |
| 50WQD15-18-2.2(I) | 50 | 15 | 18 | 2871 | 2.2 | 220 | 12.5 | 22 | 44.5 | 614 | 420 | 217 | 279 | 107 | TOS50 |
| 50WQD15-20-2.2(I) | 50 | 15 | 20 | 2871 | 2.2 | 220 | 12.5 | 22 | 44.5 | 614 | 420 | 217 | 279 | 107 | TOS50 |
| 65WQD25-10-1.5(I) | 65 | 25 | 10 | 2875 | 1.5 | 220 | 8.7 | 28 | 37 | 607 | 390 | 230 | 286 | 110 | TOS65 |
| 65WQD25-14-2.2(I) | 65 | 25 | 14 | 2871 | 2.2 | 220 | 12.5 | 28 | 47 | 630 | 436 | 236 | 290 | 116 | TOS65 |
| 80WQD40-8-2.2(I) | 80 | 40 | 8 | 2871 | 2.2 | 220 | 12.5 | 26.5 | 42.5 | 648 | 454 | 255 | 296 | 121 | TOS80 |
| 100WQD50-7-2.2(I) | 100 | 50 | 7 | 2871 | 2.2 | 220 | 12.5 | 45 | 43 | 648 | 454 | 271 | 323 | 121 | TOS100 |

Technical data and dimensions(4,6-pole 90-150kW motor)



WQ(I) type submersible sewage pump

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max.Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|-----------------------|------|--------|-----|-------|-------|---------------|---------------|---------------------------|--------|----------------|------|------|------|-----|----------|
| | (mm) | (m³/h) | (m) | (rpm) | (kw) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | H3 | |
| 350WQ900-26-90-4(I) | 350 | 900 | 26 | 1472 | 90 | 380 | 179 | 65 | 2300 | 2560 | 1984 | 907 | 1111 | 585 | TO350 |
| 350WQ900-29-110-4(I) | 350 | 900 | 29 | 1473 | 110 | 380 | 210 | 65 | 2430 | 2560 | 1984 | 907 | 1111 | 585 | TO350 |
| 350WQ1200-29-132-4(I) | 350 | 1200 | 29 | 1471 | 132 | 380 | 252 | 65 | 2500 | 2570 | 1994 | 907 | 1111 | 585 | TO350 |
| 350WQ1200-33-150-4(I) | 350 | 1200 | 33 | 1490 | 150 | 380 | 284 | 65 | 2665 | 2570 | 1994 | 907 | 1111 | 585 | TO350 |
| 400WQ1100-21-90-6(I) | 400 | 1100 | 21 | 987 | 90 | 380 | 187 | 80 | 2830 | 2858 | 2070 | 1092 | 1138 | 676 | TO400 |
| 400WQ1100-24-110-6(I) | 400 | 1100 | 24 | 984 | 110 | 380 | 211 | 80 | 2845 | 2858 | 2070 | 1092 | 1138 | 676 | TO400 |
| 400WQ1600-22-132-6(I) | 400 | 1600 | 22 | 995 | 132 | 380 | 252 | 85 | 2990 | 2863 | 2100 | 1092 | 1138 | 676 | TO400 |
| 400WQ1600-26-150-6(I) | 400 | 1600 | 26 | 994 | 150 | 380 | 286 | 85 | 3120 | 2863 | 2100 | 1092 | 1138 | 676 | TO400 |
| 500WQ1600-15-90-6(I) | 500 | 1600 | 15 | 987 | 90 | 380 | 187 | 100 | 2795 | 2923 | 2140 | 1256 | 1372 | 738 | TO500 |
| 500WQ1600-18-110-6(I) | 500 | 1600 | 18 | 984 | 110 | 380 | 211 | 100 | 2780 | 2923 | 2140 | 1256 | 1372 | 738 | TO500 |
| 500WQ2000-18-132-6(I) | 500 | 2000 | 18 | 995 | 132 | 380 | 252 | 110 | 3050 | 2962 | 2150 | 1293 | 1471 | 776 | TO500 |
| 500WQ2000-20-150-6(I) | 500 | 2000 | 20 | 994 | 150 | 380 | 286 | 110 | 3185 | 2962 | 2150 | 1293 | 1471 | 776 | TO500 |







Performance curve

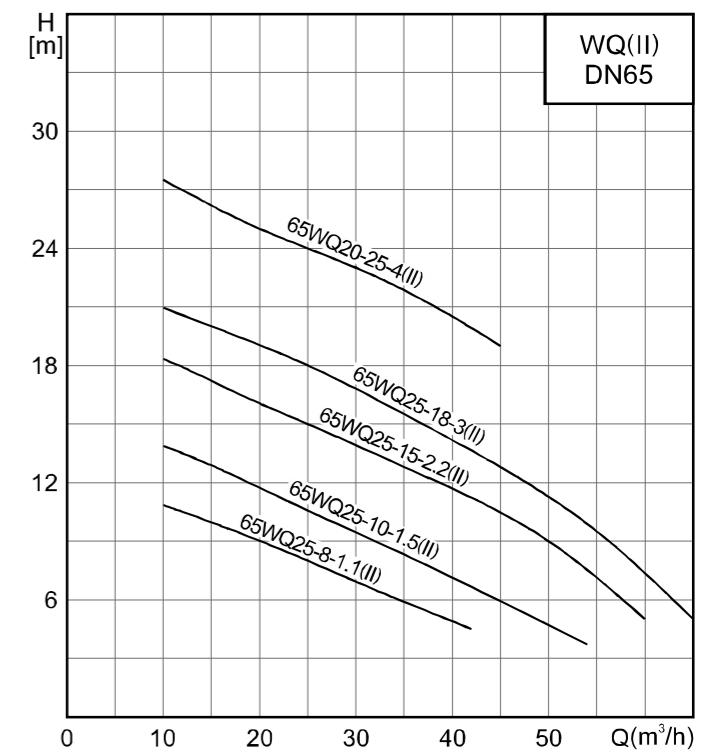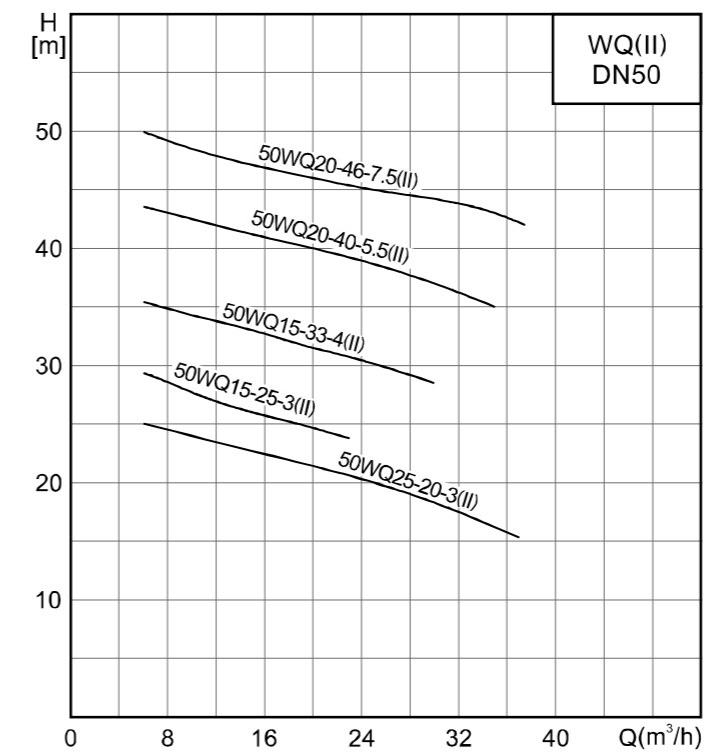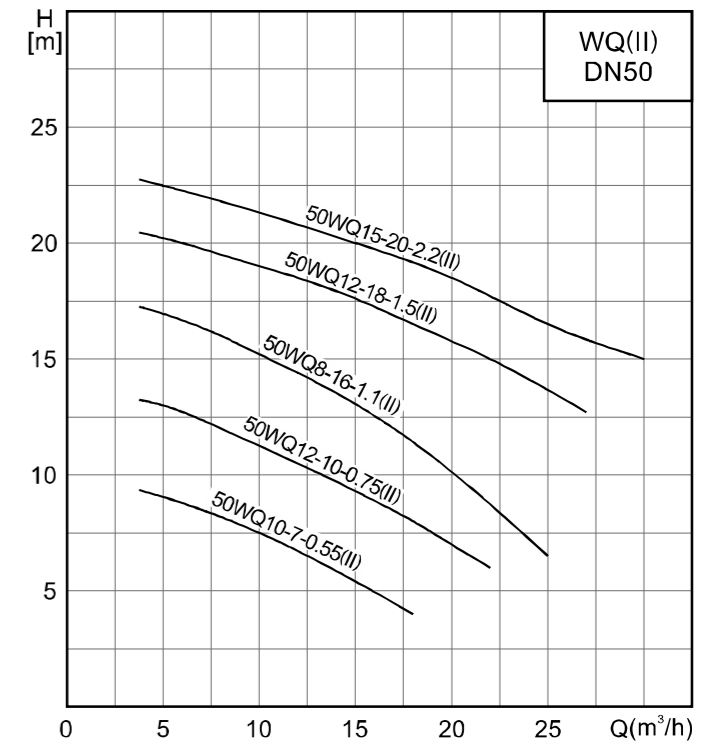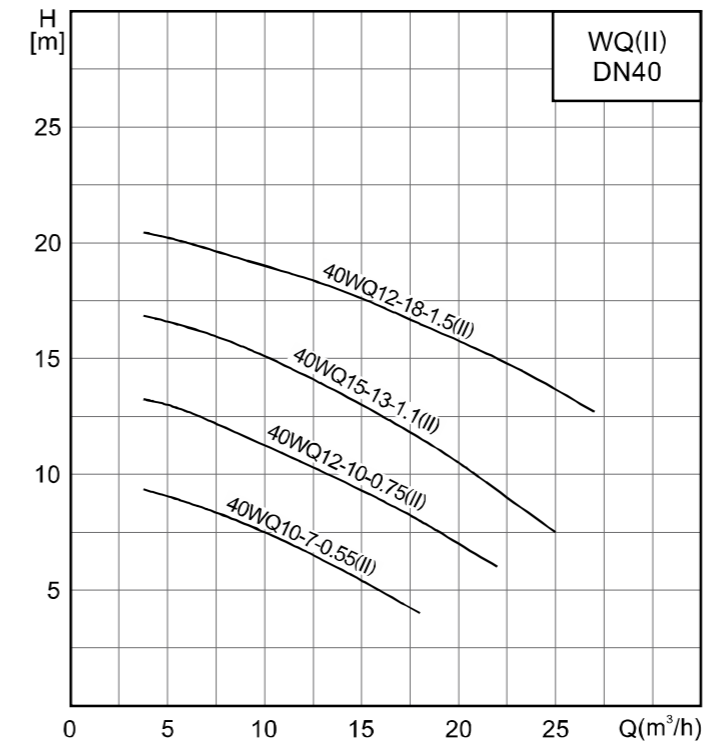



Performance curve

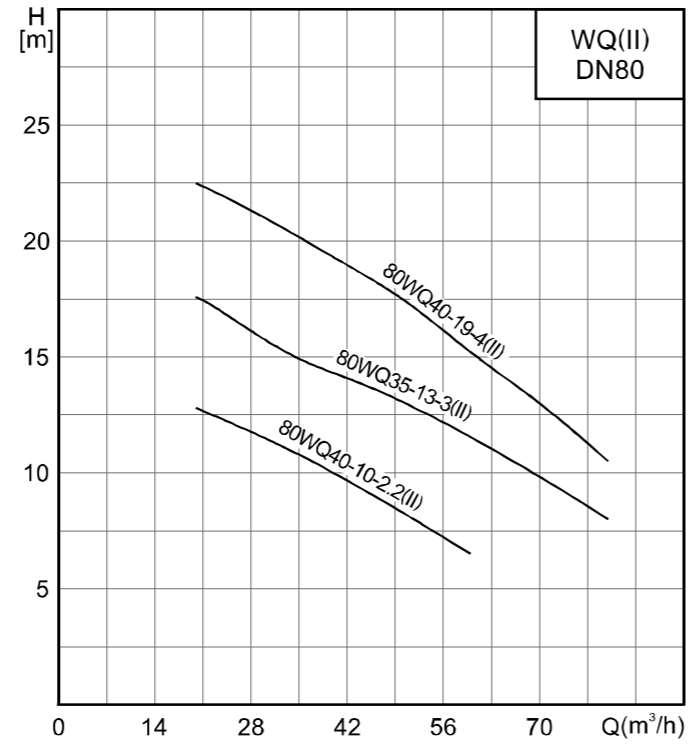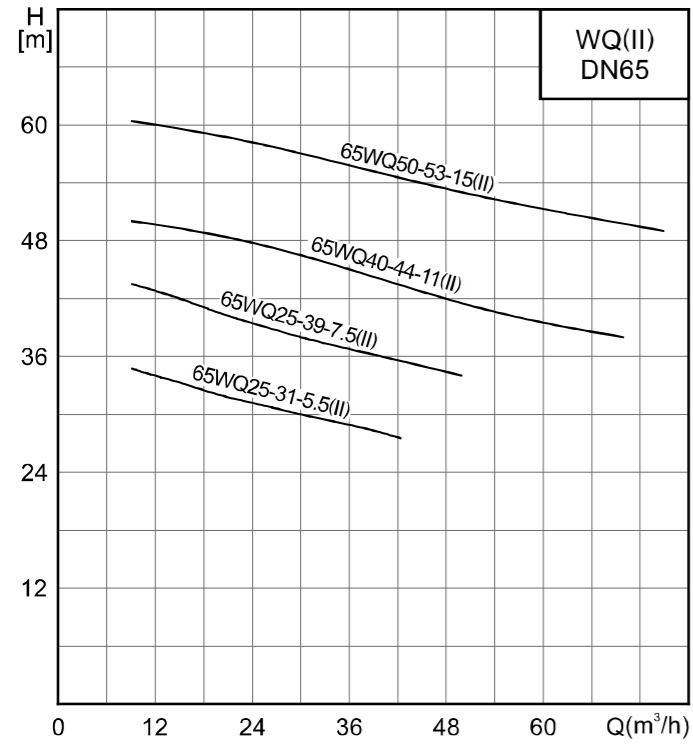







Performance curve

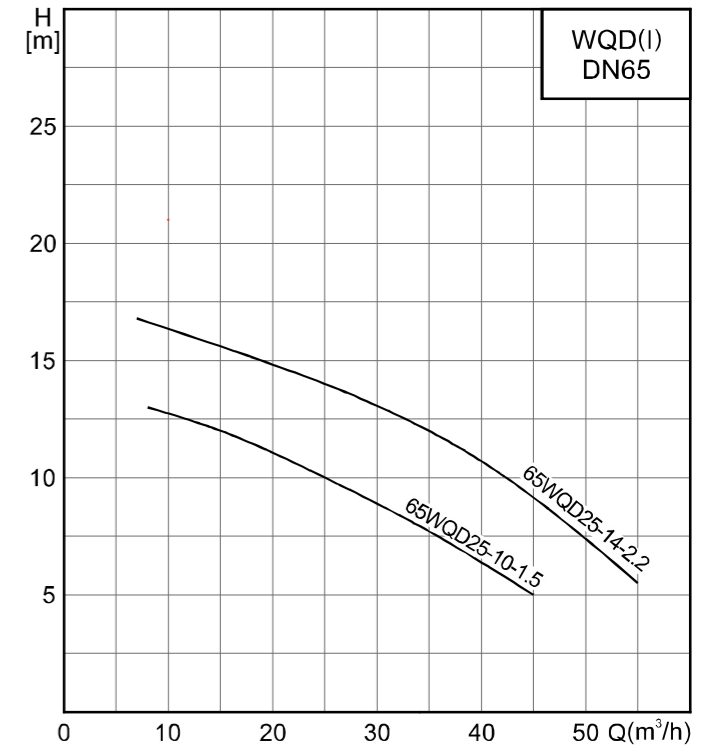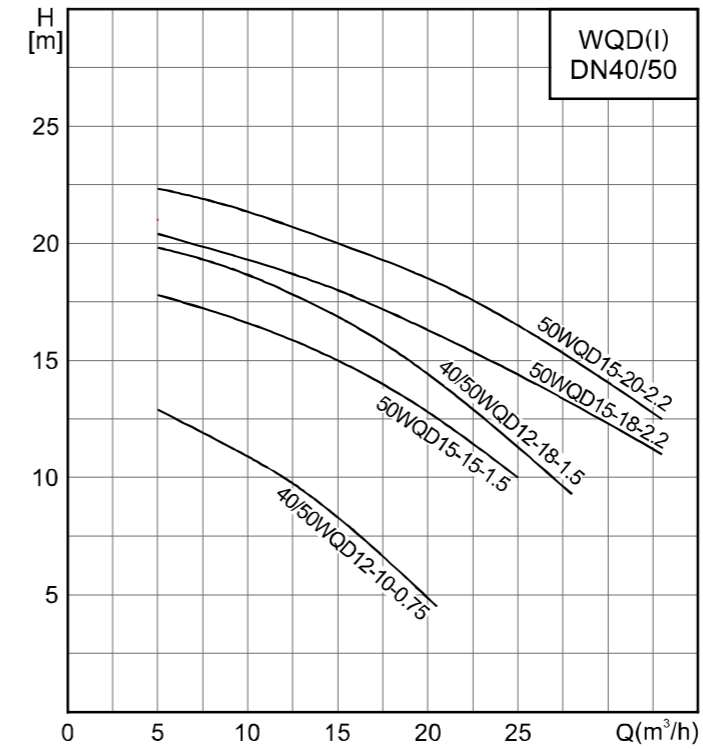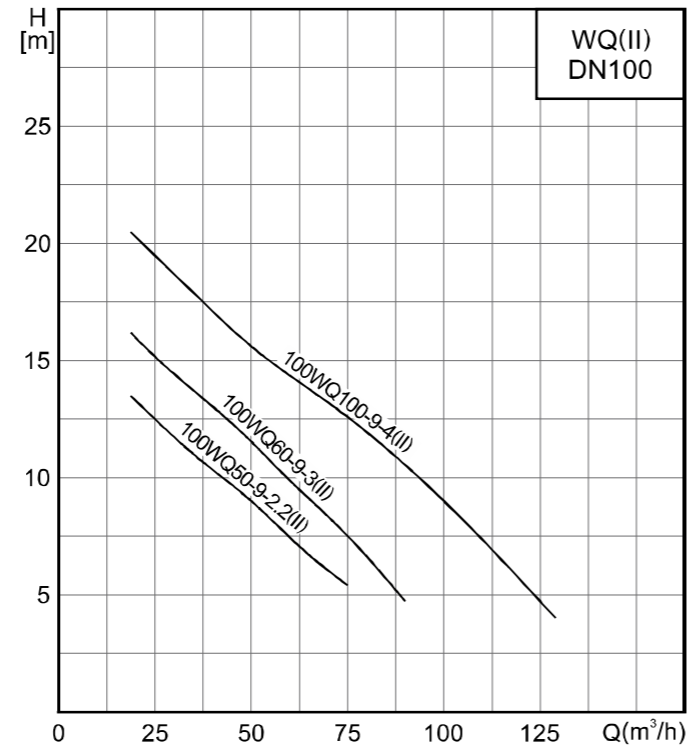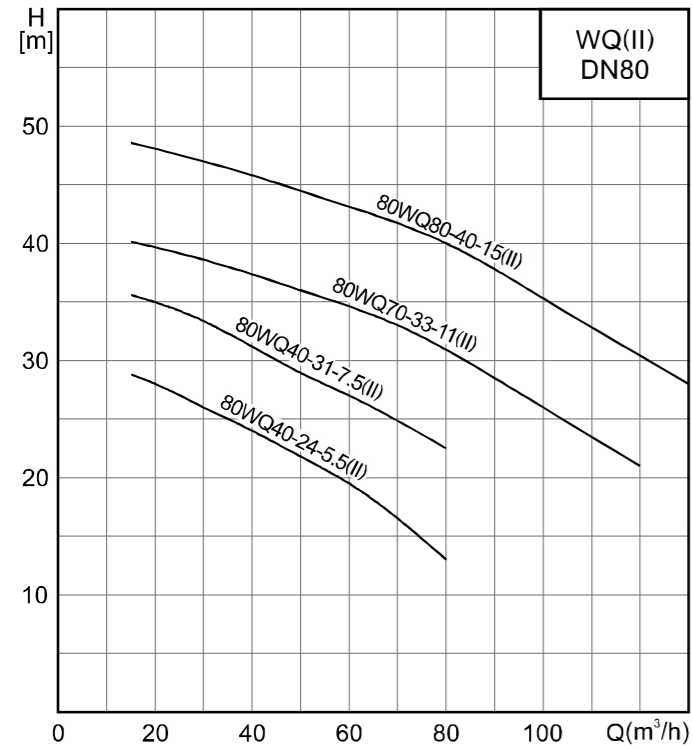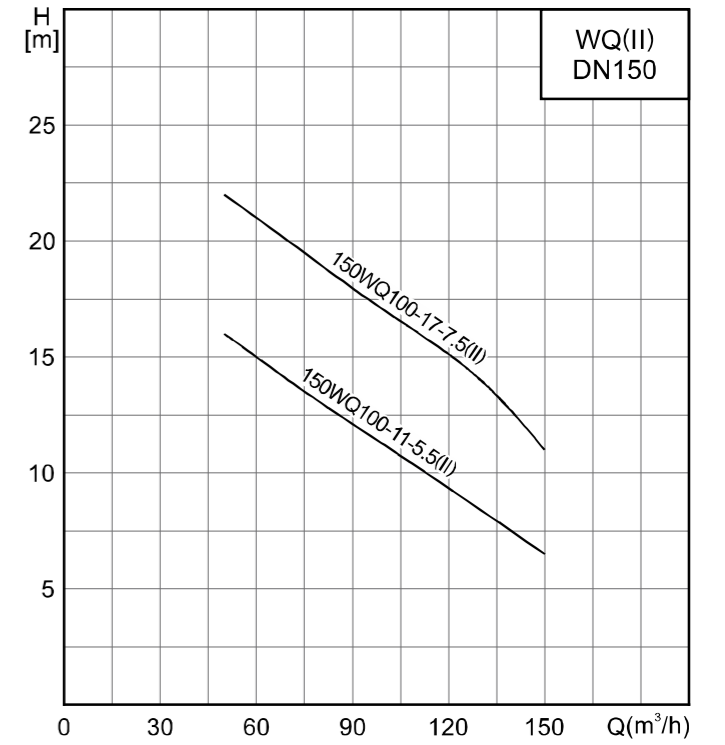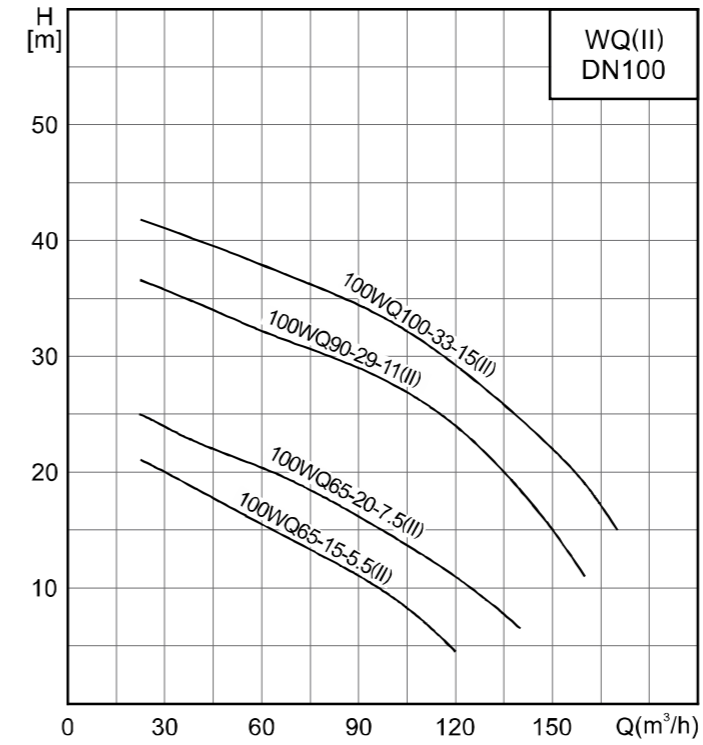



Performance curve

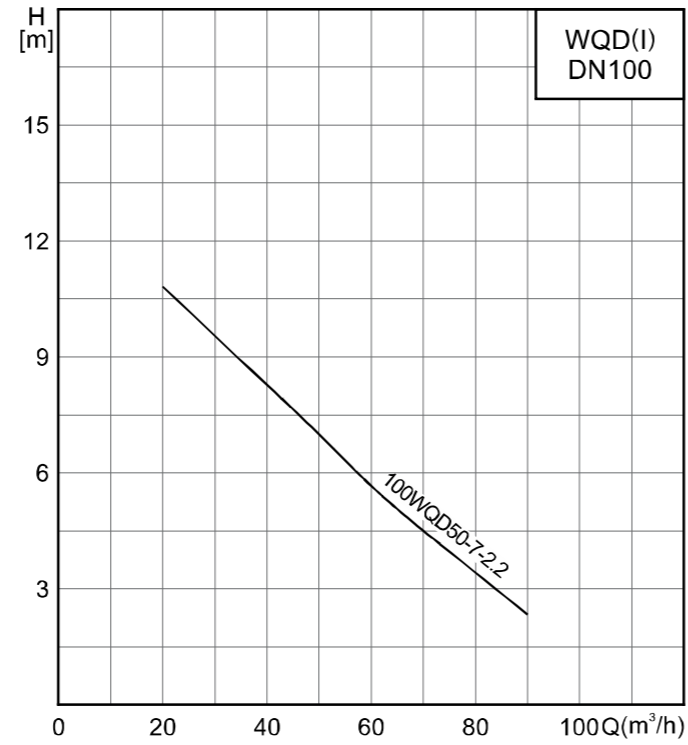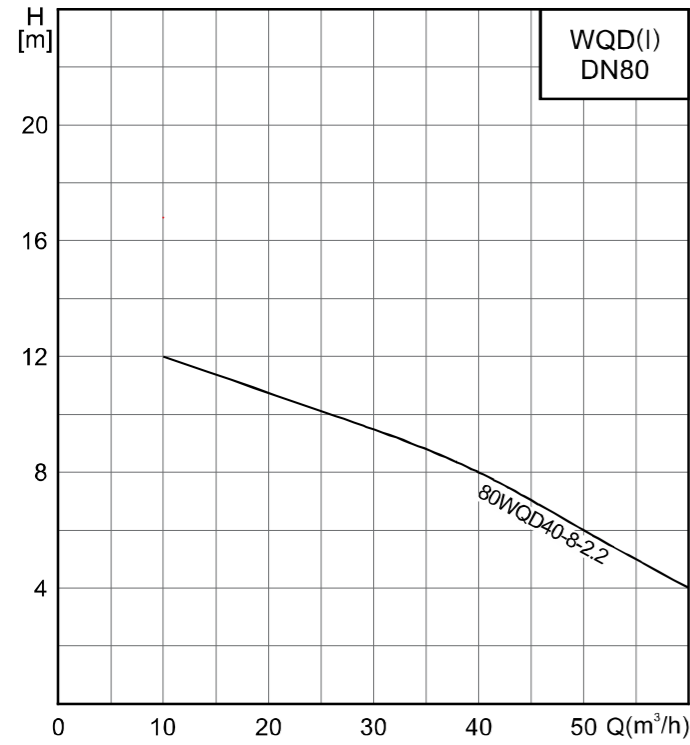







Performance curve

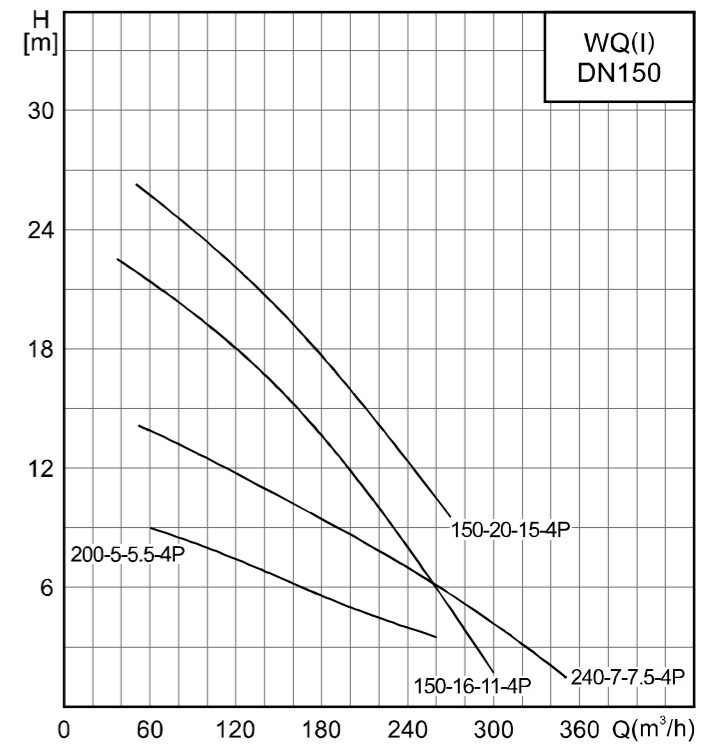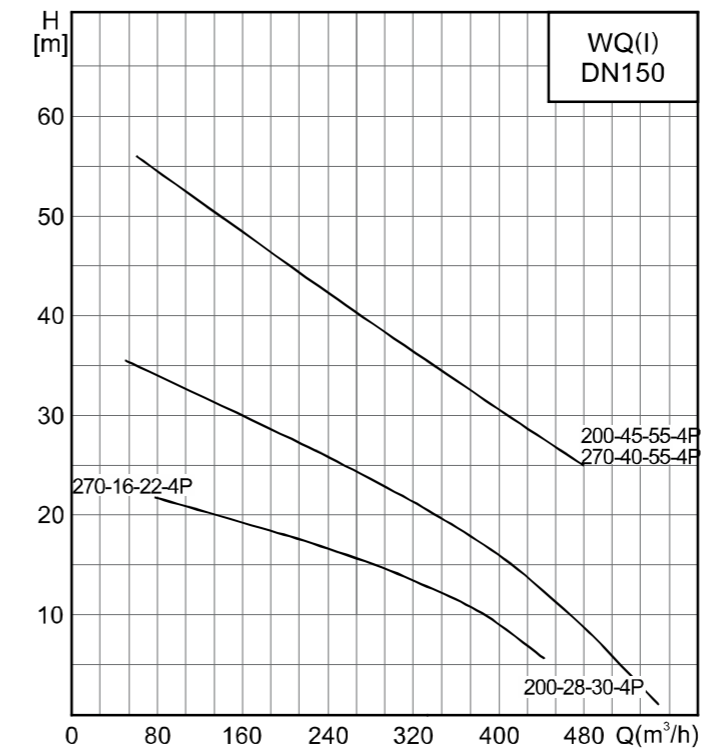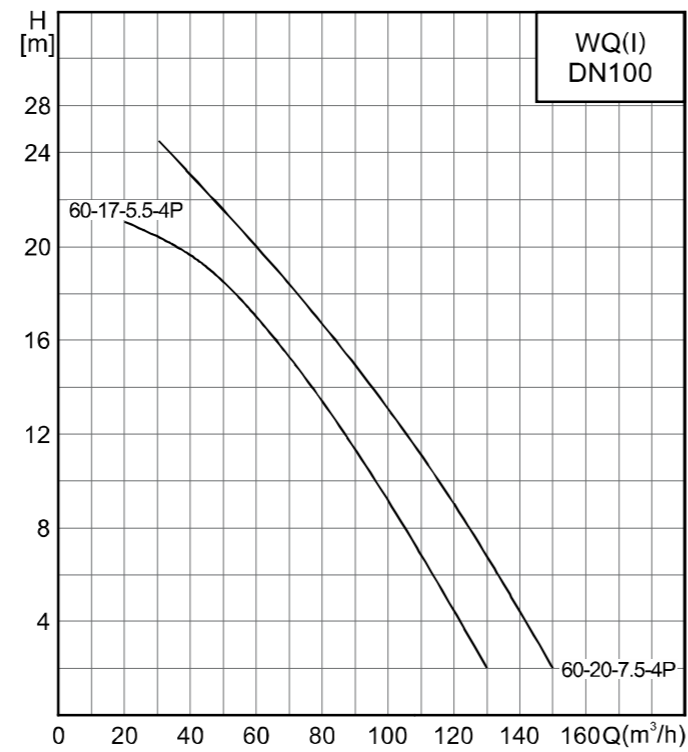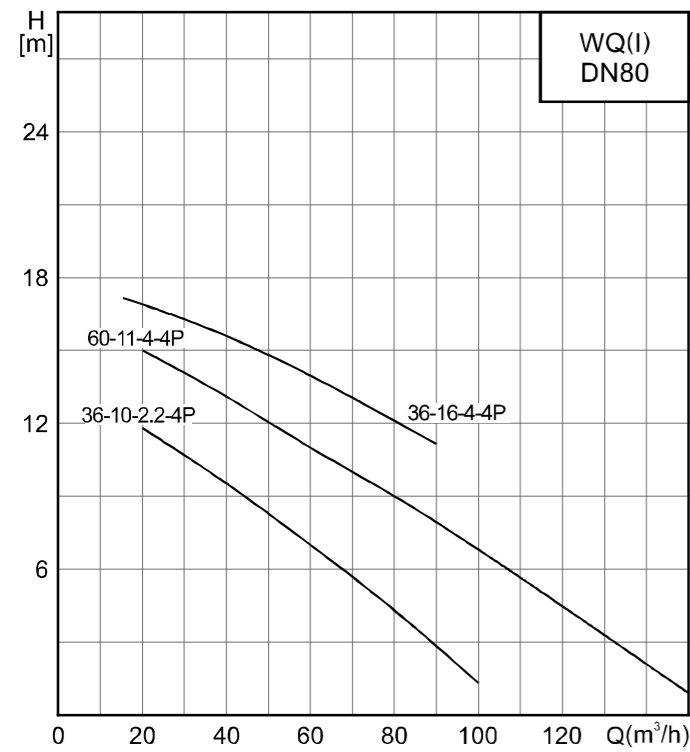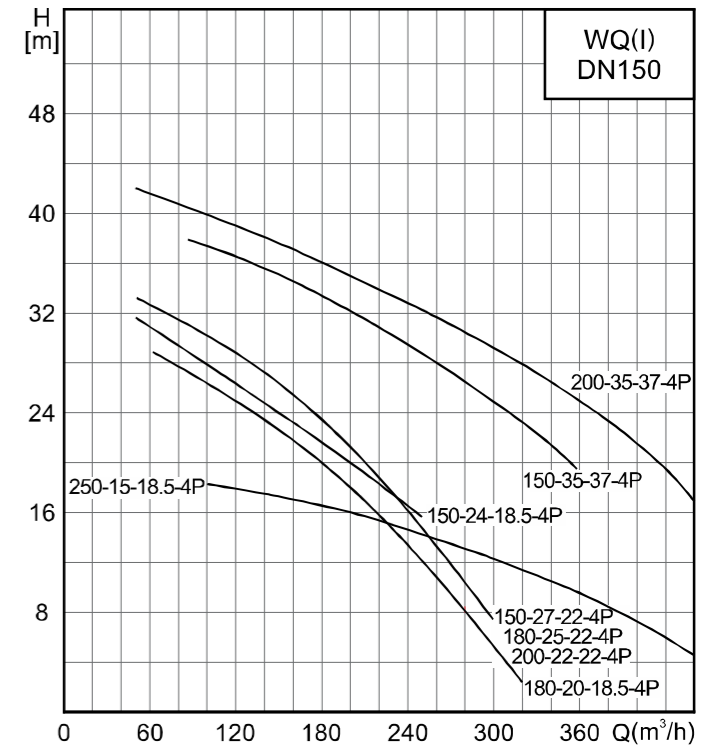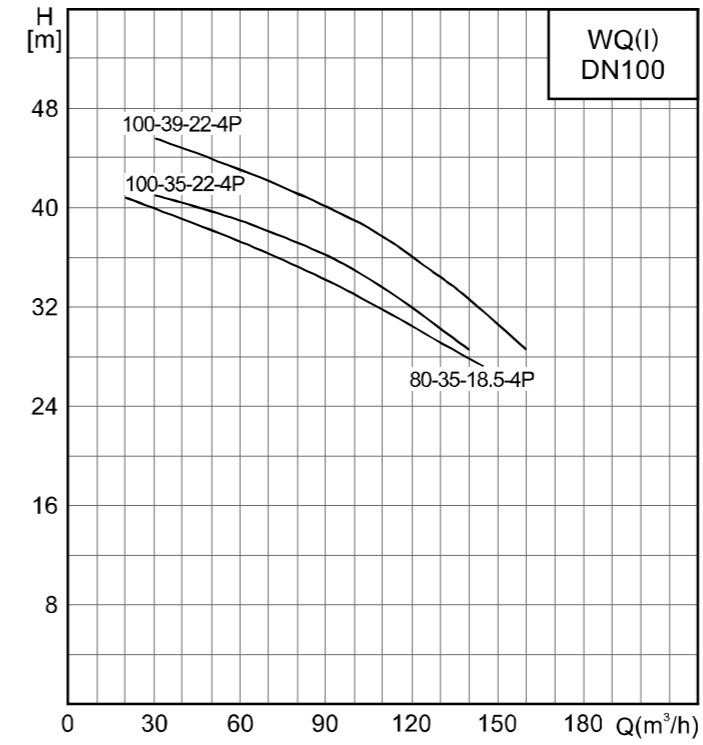



Performance curve

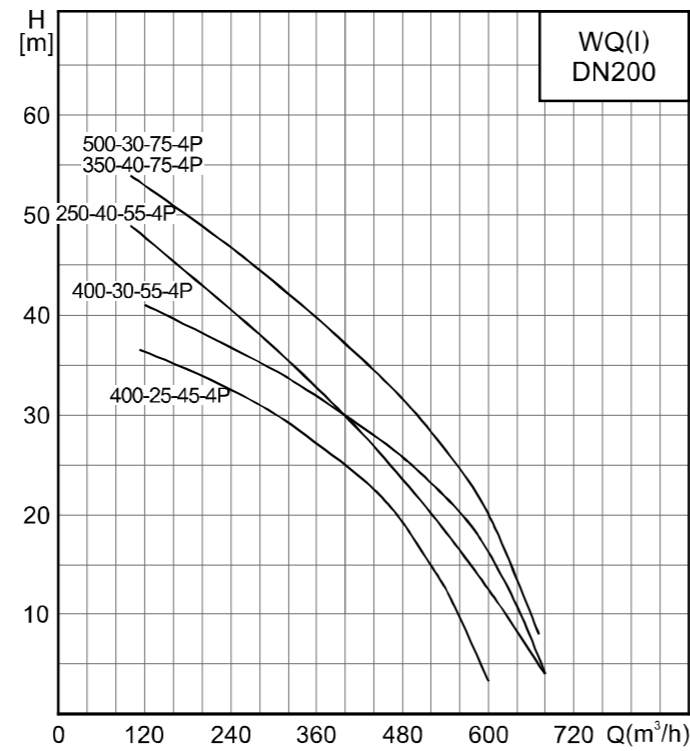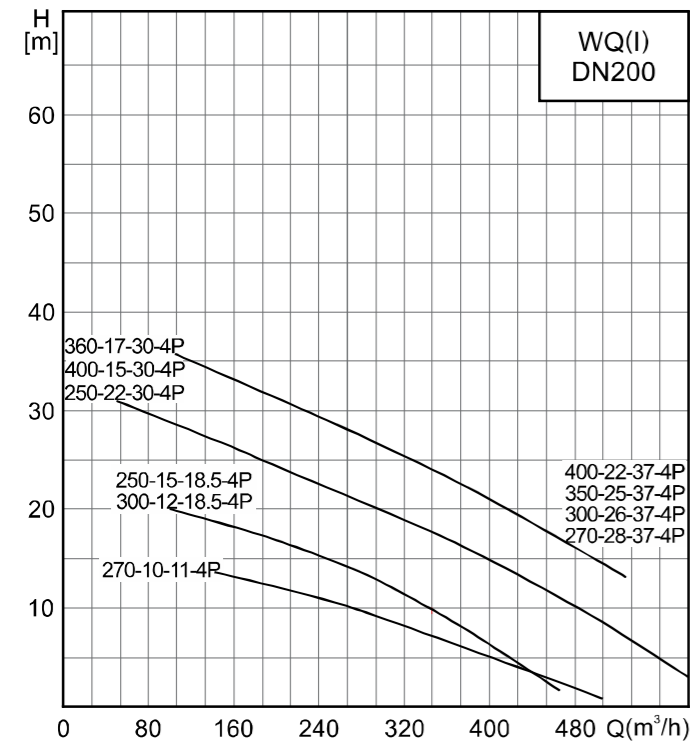







Performance curve

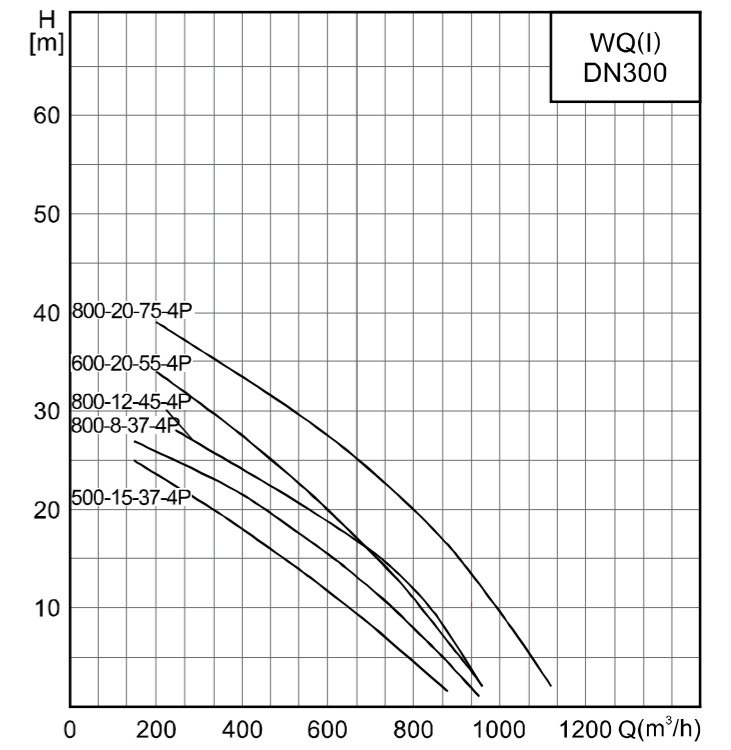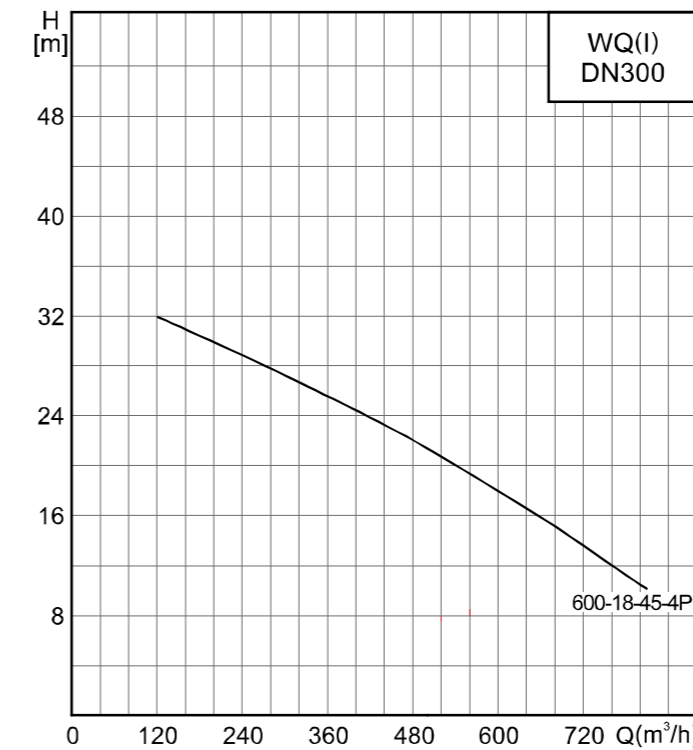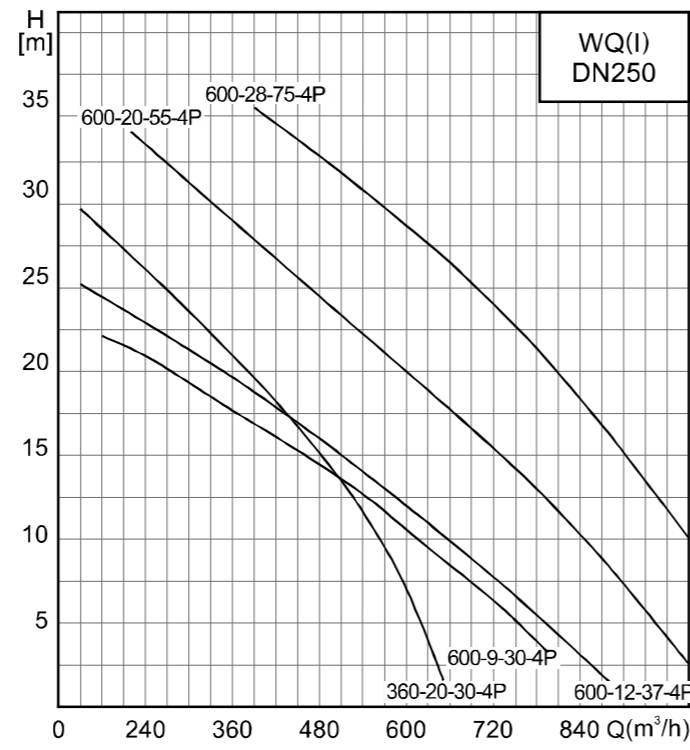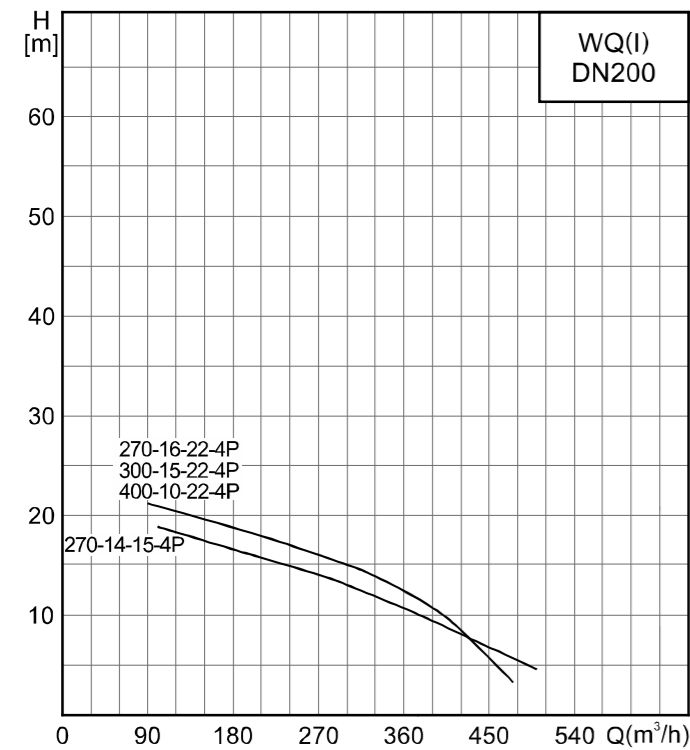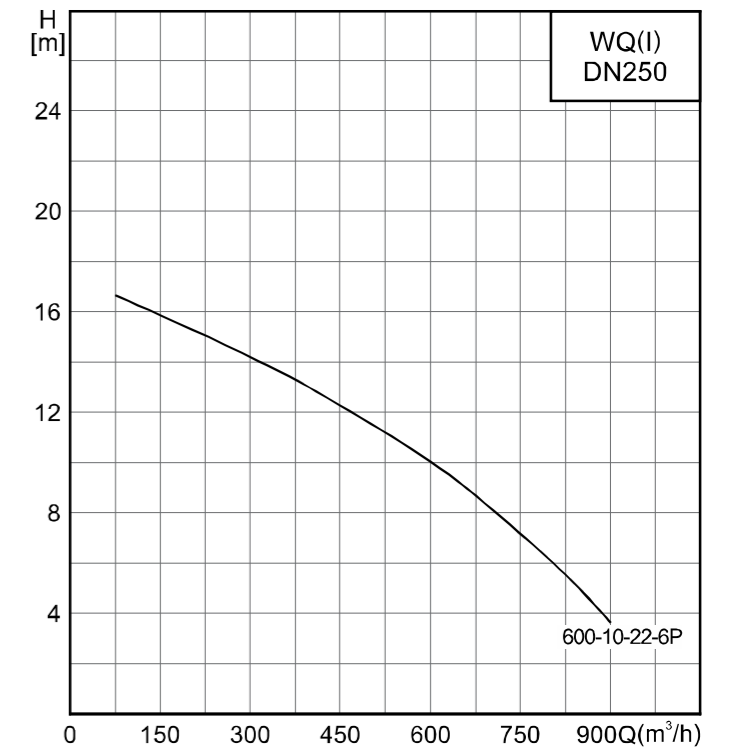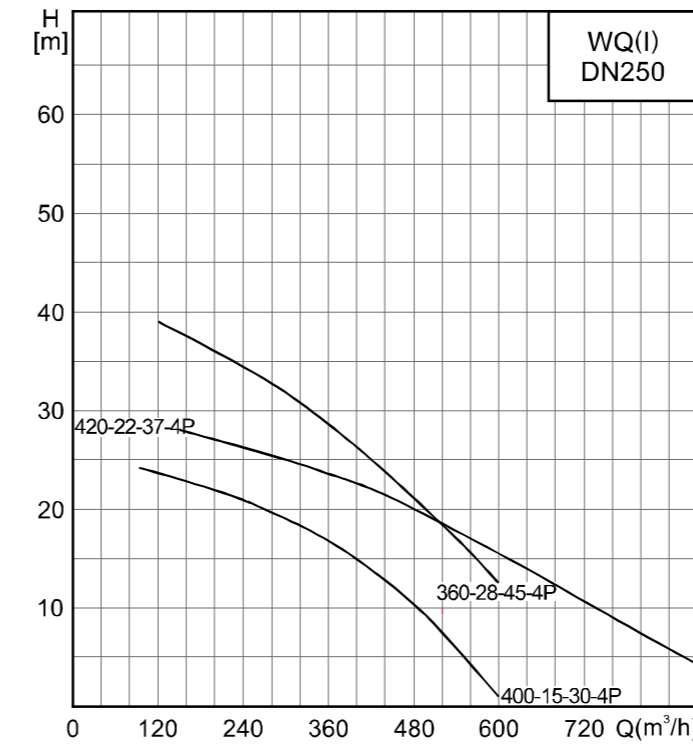



Performance curve

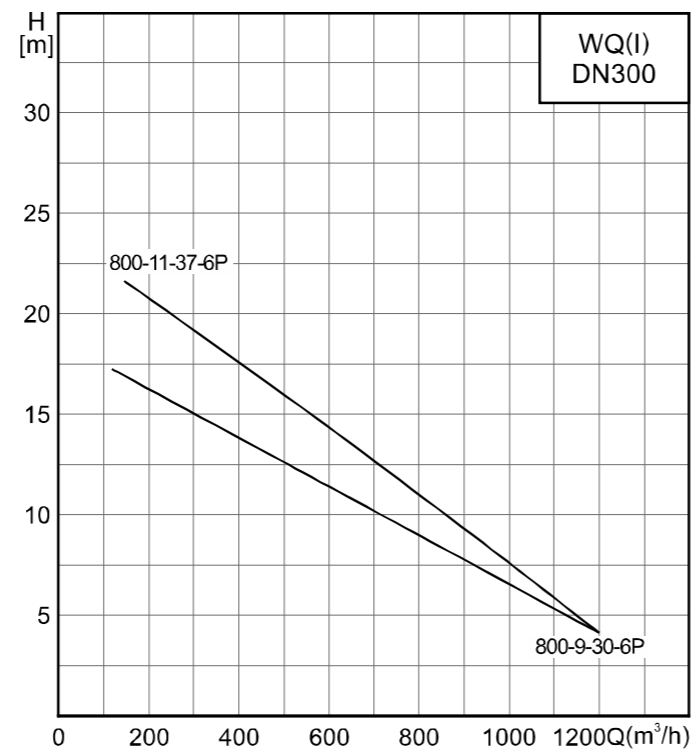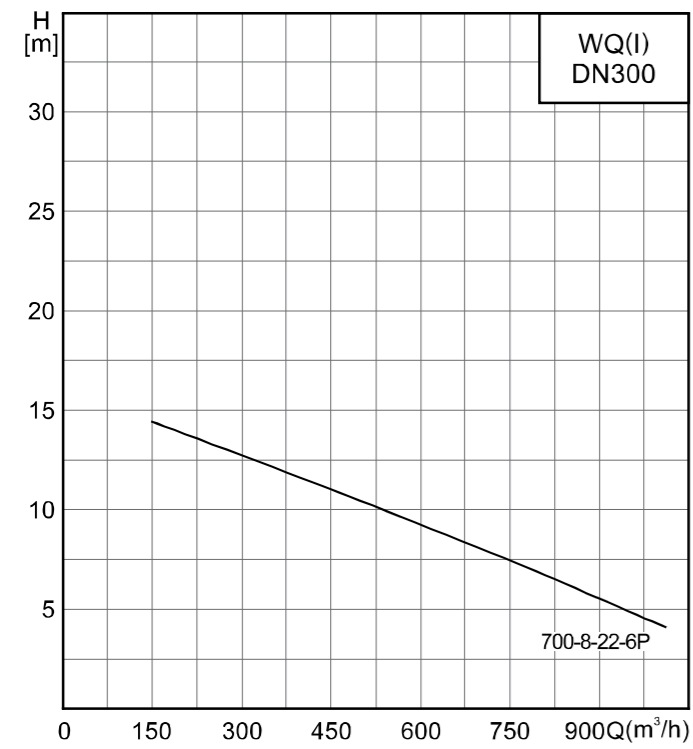





Performance curve

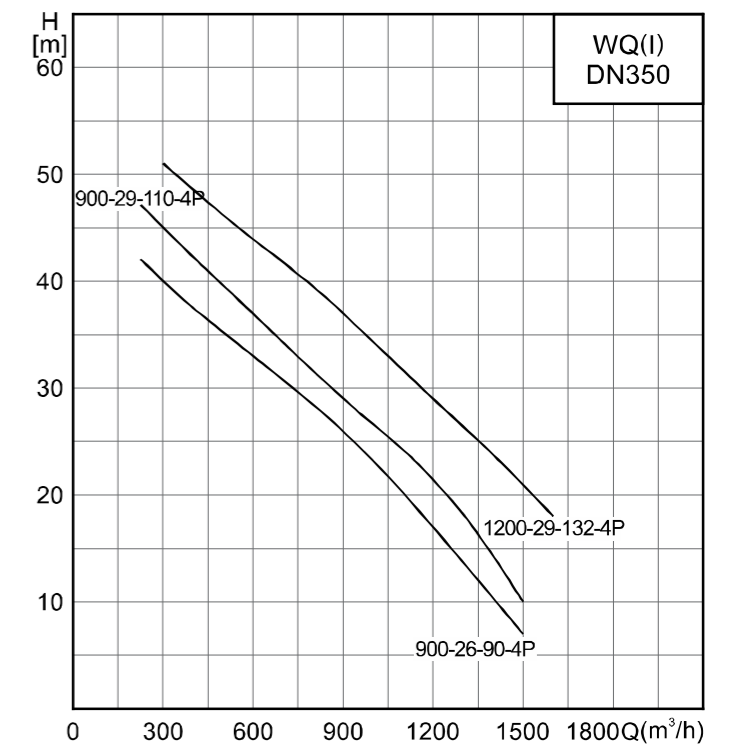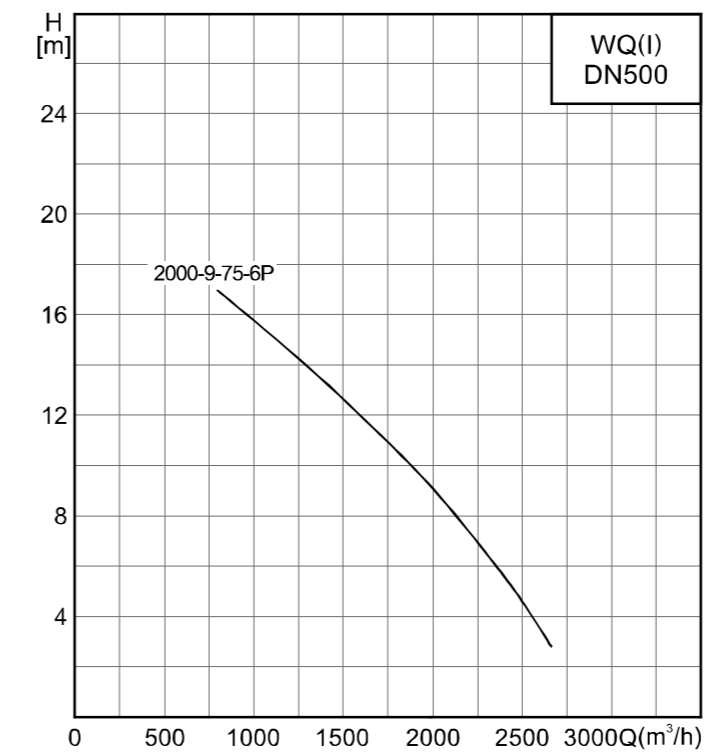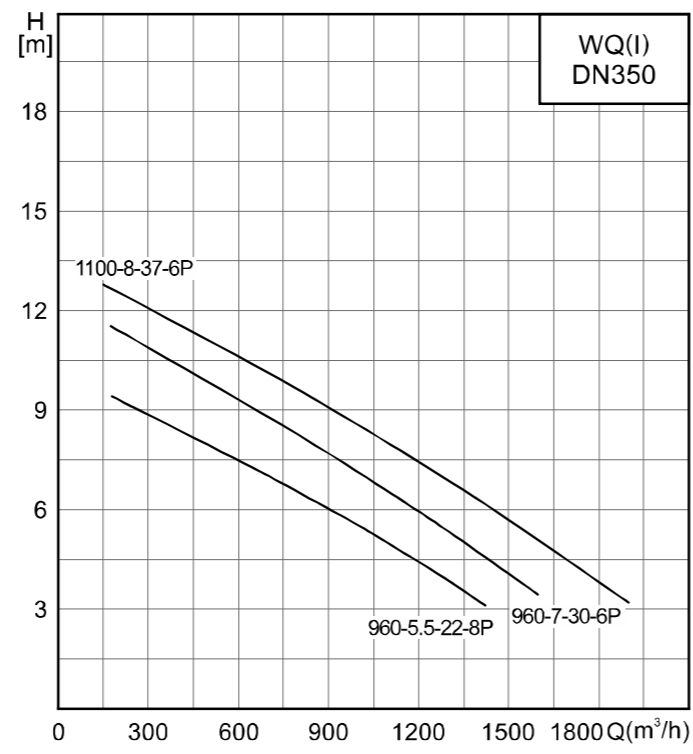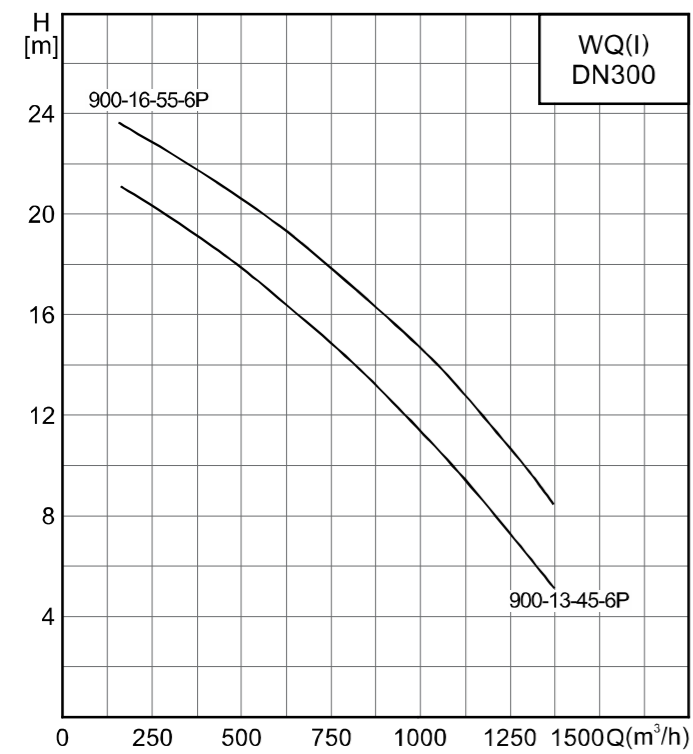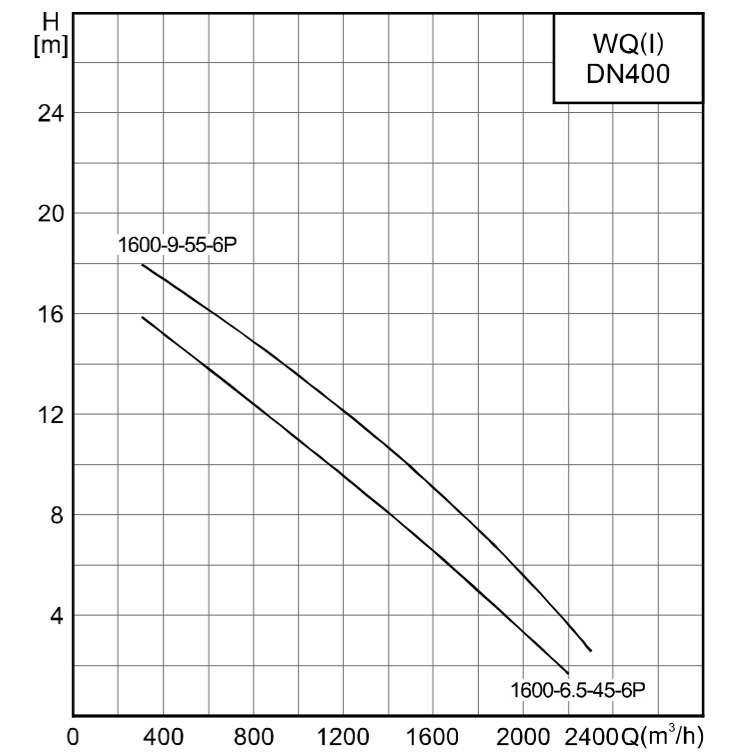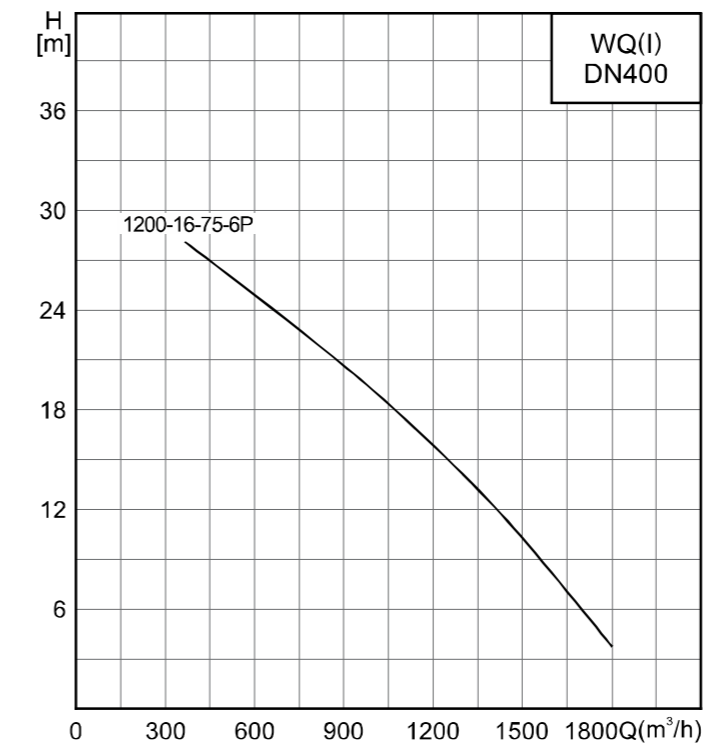

Performance curve

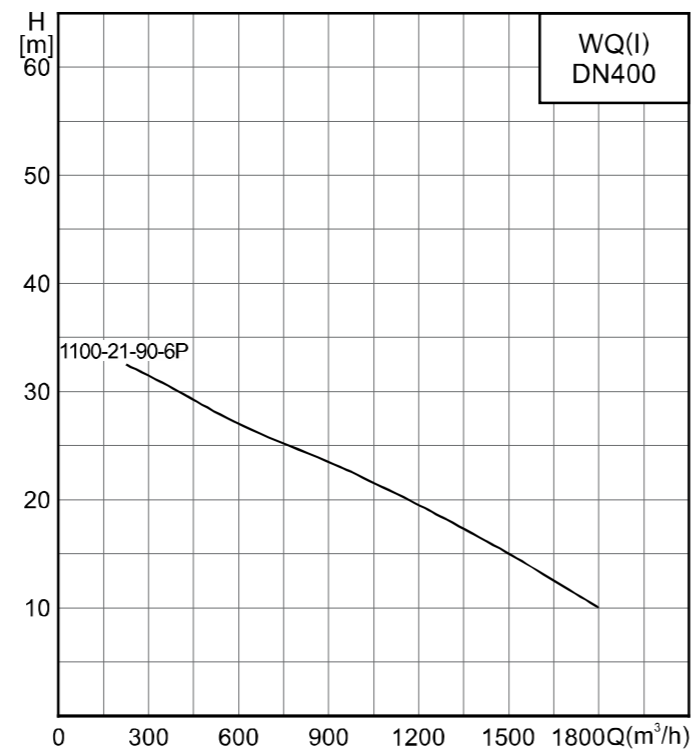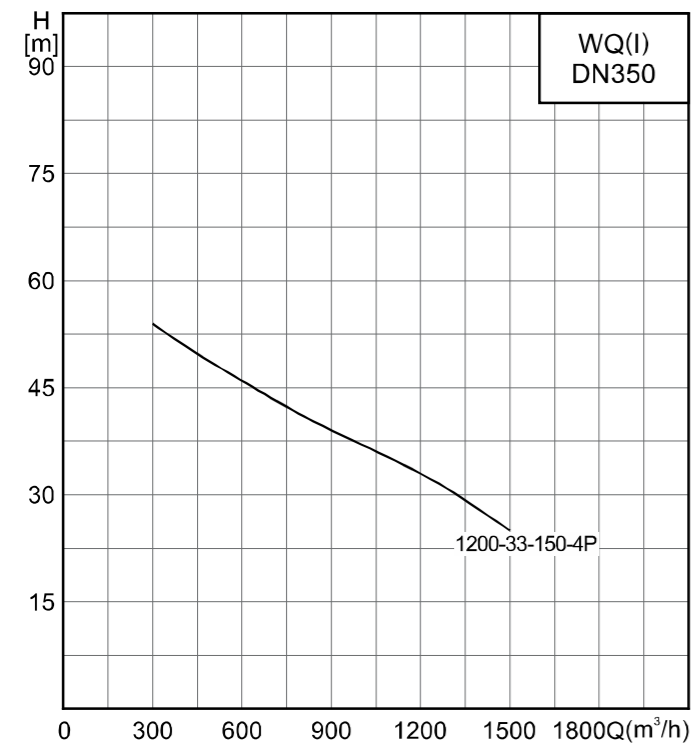


Performance curve

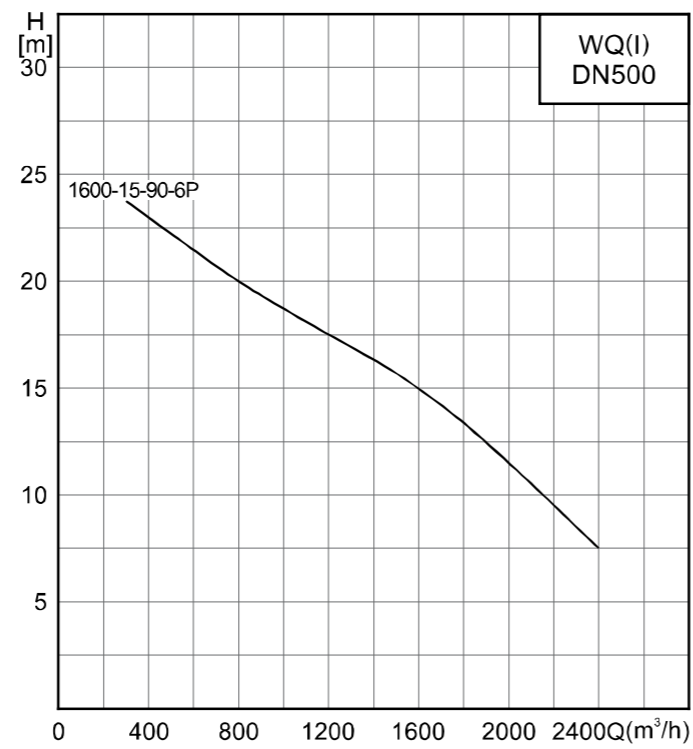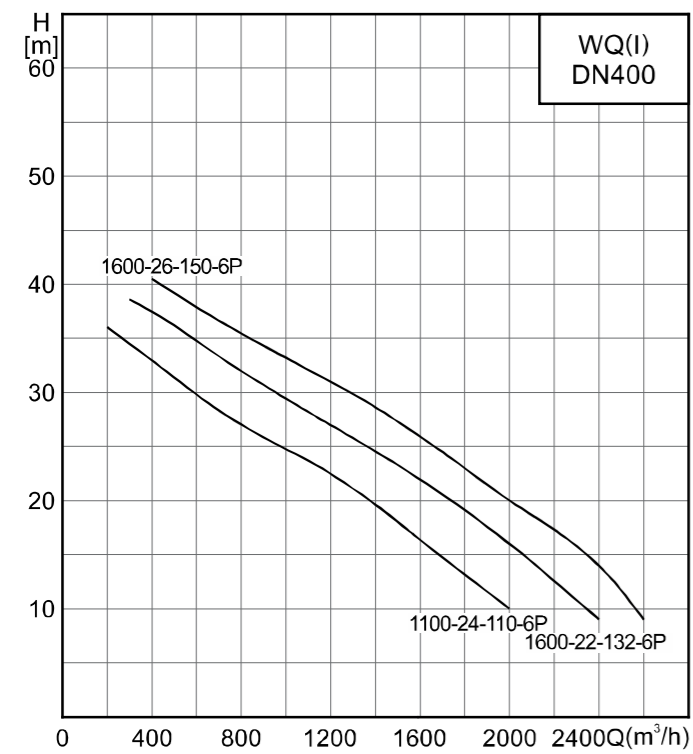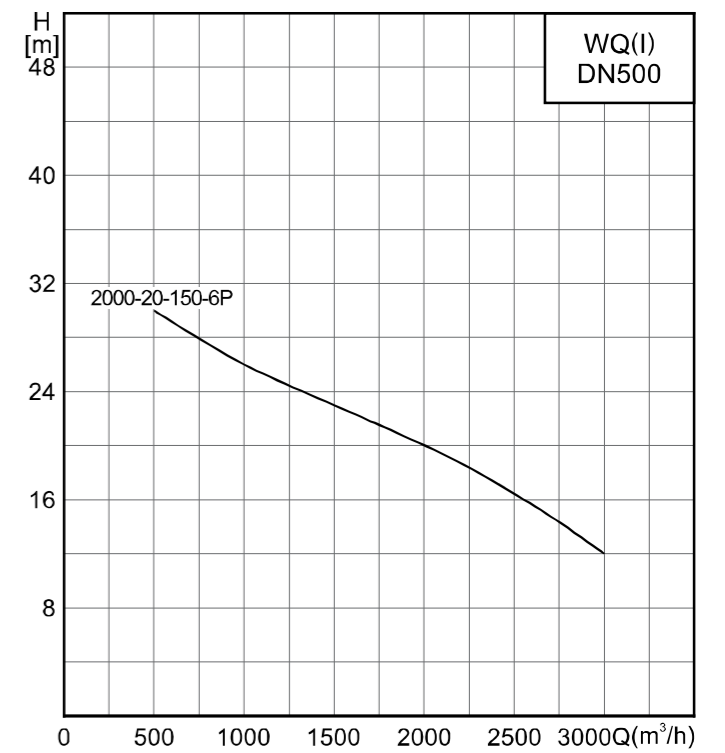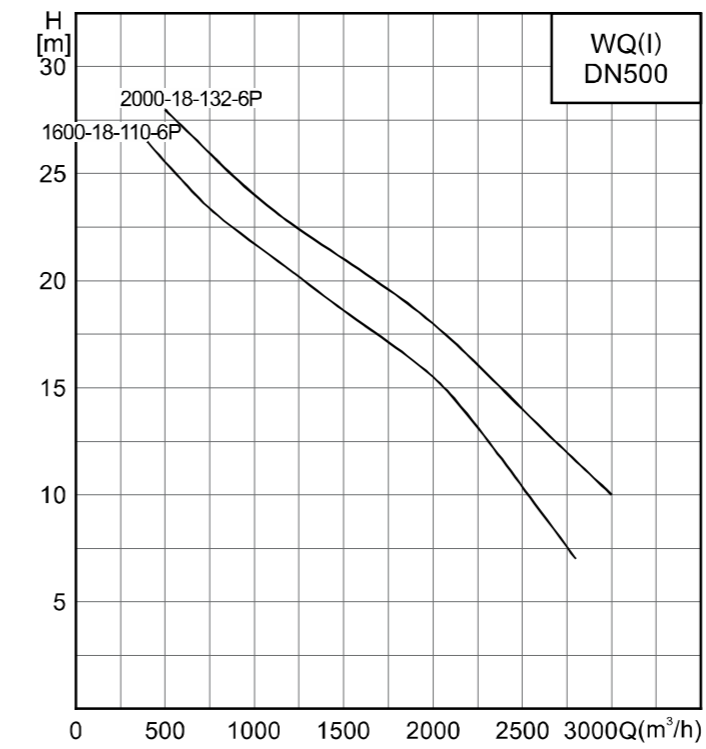

WQ-JY(I) type submersible sewage pump

Sectional drawing

WQ-JY(I) type

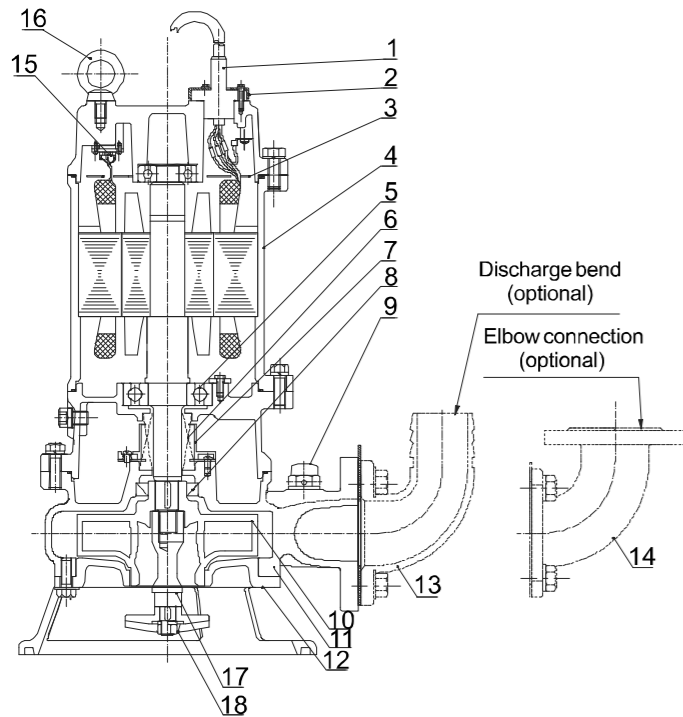

The pump is equipped with a stirring impeller. When the pumps running, the impeller is rotated to prevent the precipitation of dirt near the pump, which affects the normal operation of the pump and prevents the sediment at the bottom of the pool.

| No. | Name | Material |
|-----|-----------------------------|---------------------------|
| 1 | Cable | YZW |
| 2 | Cable gland | / |
| 3 | Threading board | / |
| 4 | Filter bracket | / |
| 5 | Bearing | / |
| 6 | Mechanical seal | Graphite/SIC SIC/SIC+C |
| 7 | Oil lifter | / |
| 8 | Oil seal | NBR1-2 |
| 9 | Air vent screw | Resin/others |
| 10 | Impeller | HT200 |
| 11 | Casing | HT200 |
| 12 | Suction cover | HT200 |
| 13 | Discharge bend (optional) | HT200 |
| 14 | Elbow connection (optional) | HT200 |
| 15 | Thermal protector | / |
| 16 | Eye-bolt | / |
| 17 | Stir shaft(for JY) | 20Cr13 |
| 18 | Stir impeller(for JY) | HT200 |

Technical data and dimensions

WQ-JY (I) type submersible sewage pumps





| Model | Dia. (mm) | Q (m ³ /h) | H (m) | Speed (rpm) | Power (kW) | Rated voltage (V) | Rated current (A) | Max.Dia. of passing solid (mm) | Weight (kg) | Dimensions(mm) | | | | | Coupling |
|-------------------------|--------------|--------------------------|----------|----------------|---------------|-------------------------|-------------------------|---|----------------|----------------|-----|-----|-----|-------|----------|
| | | | | | | | | | | H | H1 | H2 | F | H3 | |
| 50WQ9-7-0.55JY(I) | 50 | 9 | 7 | 2850 | 0.55 | 380 | 1.3 | 15 | 20.5 | 415 | 285 | 203 | 222 | 93 | TOS50 |
| 50WQ12-10-0.75JY(I) | 50 | 12 | 10 | 2850 | 0.75 | 380 | 1.8 | 15 | 21.5 | 415 | 285 | 203 | 222 | 93 | TOS50 |
| 50WQ7-15-1.1JY(I) | 50 | 7 | 15 | 2850 | 1.1 | 380 | 2.6 | 20 | 25.5 | 440 | 300 | 214 | 244 | 104 | TOS50 |
| 50WQ15-15-1.5JY(I) | 50 | 15 | 15 | 2880 | 1.5 | 380 | 3.3 | 20 | 33 | 475 | 310 | 216 | 270 | 106.5 | TOS50 |
| 50WQ15-18-2.2JY(I) | 50 | 15 | 18 | 2880 | 2.2 | 380 | 4.6 | 22 | 37.5 | 510 | 320 | 216 | 279 | 106.5 | TOS50 |
| 50WQ15-25-3JY(I) | 50 | 15 | 25 | 2840 | 3 | 380 | 6.1 | 25.5 | 44 | 540 | 335 | 218 | 279 | 108 | TOS50 |
| 50WQ15-32-4JY(I) | 50 | 15 | 32 | 2840 | 4 | 380 | 7.7 | 25.5 | 49.5 | 557 | 351 | 221 | 321 | 111 | TOS50 |
| 50WQ15-38-5.5JY(I) | 50 | 15 | 38 | 2940 | 5.5 | 380 | 10.8 | 19.5 | 84 | 790 | 450 | 221 | 321 | 118.5 | TOS50 |
| 65WQ15-10-1.1JY(I) | 65 | 15 | 10 | 2850 | 1.1 | 380 | 2.6 | 23 | 27 | 440 | 300 | 214 | 246 | 104 | TOS65 |
| 65WQ25-9-1.5JY(I) | 65 | 25 | 9 | 2850 | 1.5 | 380 | 3.3 | 28 | 30 | 480 | 340 | 160 | 283 | 110 | TOS65 |
| 65WQ25-13-2.2JY(I) | 65 | 25 | 13 | 2880 | 2.2 | 380 | 4.6 | 24 | 40.5 | 526 | 340 | 235 | 287 | 115.5 | TOS65 |
| 65WQ35-9-2.2JY(I) | 65 | 35 | 9 | 2880 | 2.2 | 380 | 4.6 | 24 | 40.5 | 526 | 340 | 235 | 287 | 115.5 | TOS65 |
| 65WQ25-18-3JY(I) | 65 | 25 | 18 | 2840 | 3 | 380 | 6.1 | 25.5 | 46 | 542 | 336 | 229 | 275 | 106.5 | TOS65 |
| 65WQ20-27-4JY(I) | 65 | 20 | 27 | 2840 | 4 | 380 | 7.7 | 26 | 52 | 563 | 357 | 235 | 320 | 114.5 | TOS65 |
| 65WQ25-30-5.5JY(I) | 65 | 25 | 30 | 2940 | 5.5 | 380 | 10.8 | 17.5 | 86 | 793 | 450 | 236 | 314 | 129.5 | TOS65 |
| 80WQ40-10-2.2JY(I) | 80 | 40 | 10 | 2880 | 2.2 | 380 | 4.6 | 26.5 | 42.5 | 545 | 370 | 256 | 296 | 120.5 | TOS80 |
| 80WQ35-13-3JY(I) | 80 | 35 | 13 | 2840 | 3 | 380 | 6.1 | 34.5 | 47 | 565 | 360 | 256 | 300 | 120.5 | TOS80 |
| 80WQ40-15-4JY(I) | 80 | 40 | 15 | 2840 | 4 | 380 | 7.7 | 26 | 51 | 563 | 357 | 250 | 318 | 114.5 | TOS80 |
| 80WQ40-22-5.5JY(I) | 80 | 40 | 22 | 2940 | 5.5 | 380 | 10.8 | 17.5 | 85.5 | 793 | 450 | 251 | 310 | 129.5 | TOS80 |
| 80WQ40-30-7.5JY(I) | 80 | 40 | 30 | 2940 | 7.5 | 380 | 14.3 | 17.5 | 92 | 790 | 500 | 251 | 310 | 130 | TOS80 |
| 100WQ50-7-2.2JY(I) | 100 | 50 | 7 | 2880 | 2.2 | 380 | 4.6 | 45 | 48 | 522 | 400 | 170 | 323 | 120.5 | TOS100 |
| 100WQ50-10-3JY(I) | 100 | 50 | 10 | 2840 | 3 | 380 | 6.1 | 10 | 50 | 564 | 420 | 190 | 311 | 120.5 | TOS100 |
| 100WQ50-12-4JY(I) | 100 | 50 | 12 | 2840 | 4 | 380 | 7.7 | 34.5 | 53.5 | 607 | 400 | 292 | 337 | 142 | TOS100 |
| 100WQ75-12-4JY(I) | 100 | 75 | 12 | 2840 | 4 | 380 | 7.7 | 34.5 | 53.5 | 607 | 400 | 292 | 337 | 142 | TOS100 |
| 100WQ65-15-5.5JY(I) | 100 | 65 | 15 | 2940 | 5.5 | 380 | 10.8 | 35.5 | 89 | 835 | 500 | 292 | 337 | 145 | TOS100 |
| 100WQ70-18-7.5JY(I) | 100 | 70 | 18 | 2940 | 7.5 | 380 | 14.3 | 32.5 | 98 | 835 | 500 | 297 | 365 | 147 | TOS100 |
| 100WQ100-15-7.5JY(I) | 100 | 100 | 15 | 2940 | 7.5 | 380 | 14.3 | 32.5 | 98 | 835 | 500 | 297 | 365 | 147 | TOS100 |
| 150WQ100-10-7.5JY(I) | 150 | 100 | 10 | 2940 | 7.5 | 380 | 14.3 | 31 | 109 | 850 | 510 | 365 | 398 | 157.5 | TOS150 |
| 150WQ140-10-7.5JY(I) | 150 | 140 | 10 | 2940 | 7.5 | 380 | 14.3 | 30 | 105 | 909 | 670 | 425 | 398 | 214.5 | TOS150 |
| 65WQ35-50-11JY(I) | 65 | 35 | 50 | 2930 | 11 | 380 | 21.7 | 22 | 98 | 916 | 630 | 311 | 363 | 191 | TOS65 |
| 65WQ30-54-11JY(I) | 65 | 30 | 54 | 2930 | 11 | 380 | 21.7 | 22 | 98 | 916 | 630 | 311 | 362 | 191 | TOS65 |
| 80WQ50-29-11JY(I) | 80 | 50 | 29 | 2930 | 11 | 380 | 21.7 | 22 | 138 | 924 | 670 | 320 | 410 | 181.5 | TOS80 |
| 100WQ100-22-11JY(I) | 100 | 100 | 22 | 2930 | 11 | 380 | 21.7 | 25 | 131 | 908 | 650 | 344 | 388 | 194 | TOS100 |
| 100WQ100-30-15JY(I) | 100 | 100 | 30 | 2930 | 15 | 380 | 29.1 | 27.5 | 136 | 908 | 650 | 344 | 388 | 214.5 | TOS100 |
| 100WQ100-35-22JY-4(I) | 100 | 100 | 35 | 1460 | 22 | 380 | 43.1 | 35 | 313 | 1232 | 950 | 439 | 605 | 320.5 | TOS100F |
| 150WQ150-13-11JY-4(I) | 150 | 150 | 13 | 1440 | 11 | 380 | 22.9 | 52 | 219 | 1097 | 813 | 535 | 575 | 325 | TOS150 |
| 150WQ140-24-15JY(I) | 150 | 140 | 24 | 2930 | 15 | 380 | 29.1 | 40 | 148 | 955 | 690 | 425 | 398 | 325 | TOS150 |
| 150WQ150-19-15JY-4(I) | 150 | 150 | 19 | 1440 | 15 | 380 | 30.6 | 57 | 240 | 1167 | 880 | 535 | 573 | 325 | TOS150 |
| 150WQ200-17-18.5JY-4(I) | 150 | 200 | 17 | 1460 | 18.5 | 380 | 36.9 | 45 | 295 | 1270 | 980 | 500 | 575 | 289 | TOS150 |
| 150WQ250-15-18.5JY-4(I) | 150 | 250 | 15 | 1460 | 18.5 | 380 | 36.9 | 45 | 313 | 1273 | 980 | 530 | 575 | 289 | TOS150 |

Technical data and dimensions



WQ-JY(I) type submersible sewage pumps

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max. Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|-------------------------|------|---------------------|-----|-------|-------|---------------|---------------|----------------------------|--------|----------------|-----|-----|-----|-------|----------|
| | (mm) | (m ³ /h) | (m) | (rpm) | (kW) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | H3 | |
| 150WQ150-25-22JY-4(I) | 150 | 150 | 25 | 1460 | 22 | 380 | 43.1 | 65 | 323 | 1273 | 980 | 500 | 575 | 320 | TOS150 |
| 150WQ300-16-22JY-4(I) | 150 | 300 | 16 | 1460 | 22 | 380 | 43.1 | 65 | 326 | 1273 | 980 | 530 | 575 | 320.5 | TOS150 |
| 200WQ210-11-11JY-4(I) | 200 | 210 | 11 | 1440 | 11 | 380 | 22.9 | 50 | 258 | 1135 | 810 | 545 | 569 | 335 | TO200 |
| 200WQ300-11-15JY-4(I) | 200 | 300 | 11 | 1440 | 15 | 380 | 30.6 | 35 | 258 | 1184 | 880 | 550 | 547 | 340 | TO200 |
| 200WQ300-13-18.5JY-4(I) | 200 | 300 | 11 | 1460 | 18.5 | 380 | 36.9 | 63 | 313 | 1273 | 980 | 532 | 575 | 320.5 | TO200 |






Performance curve

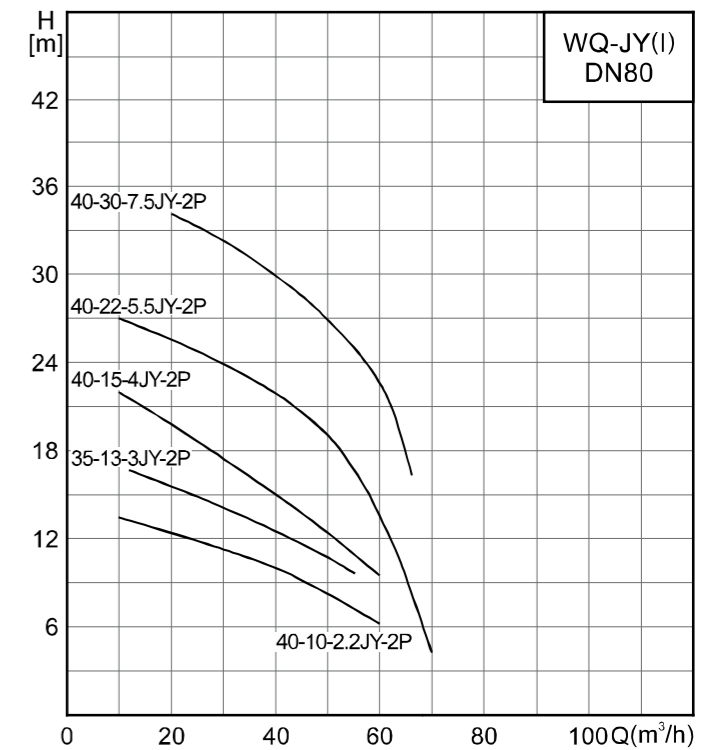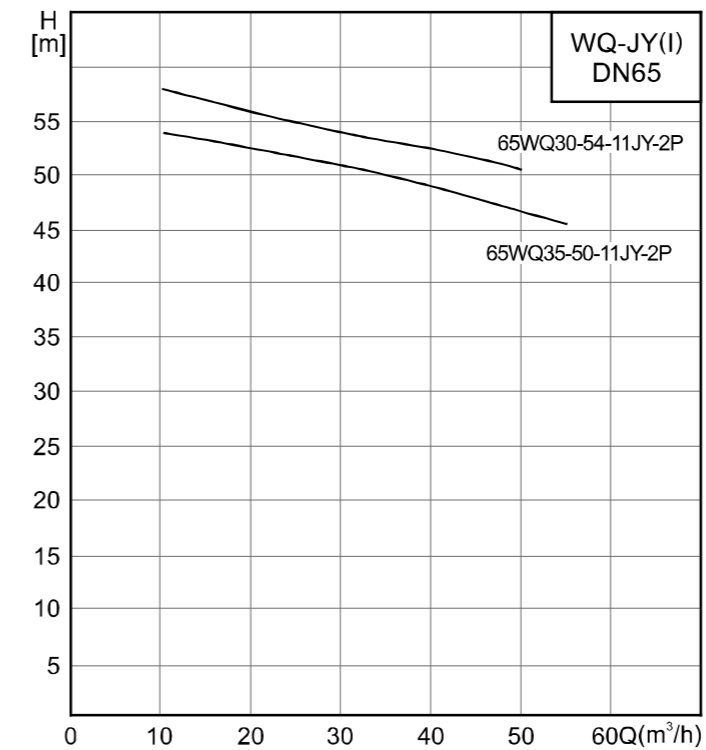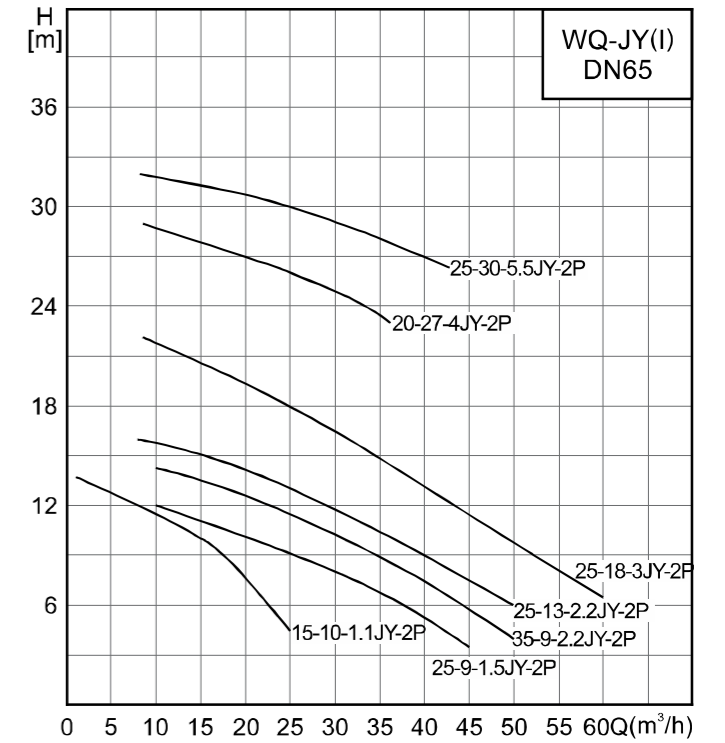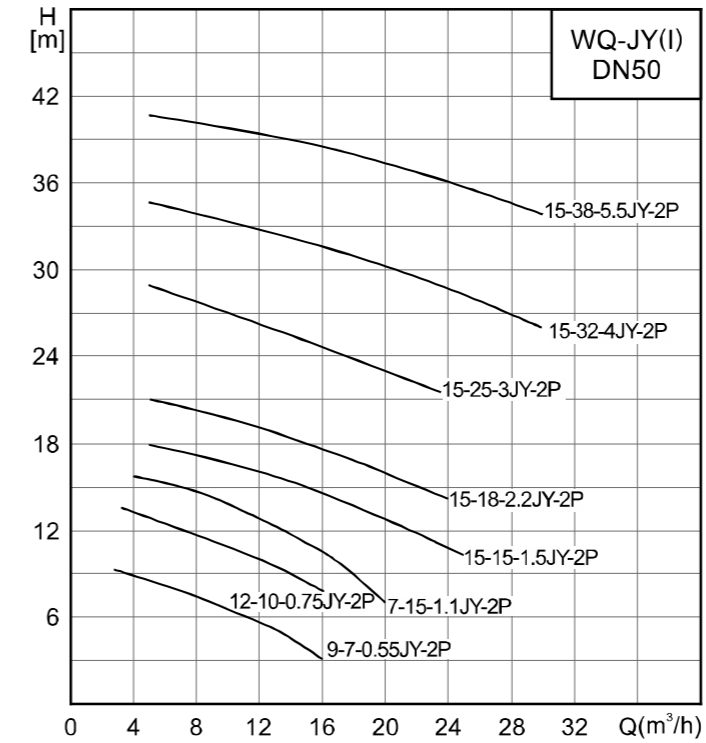

Performance curve

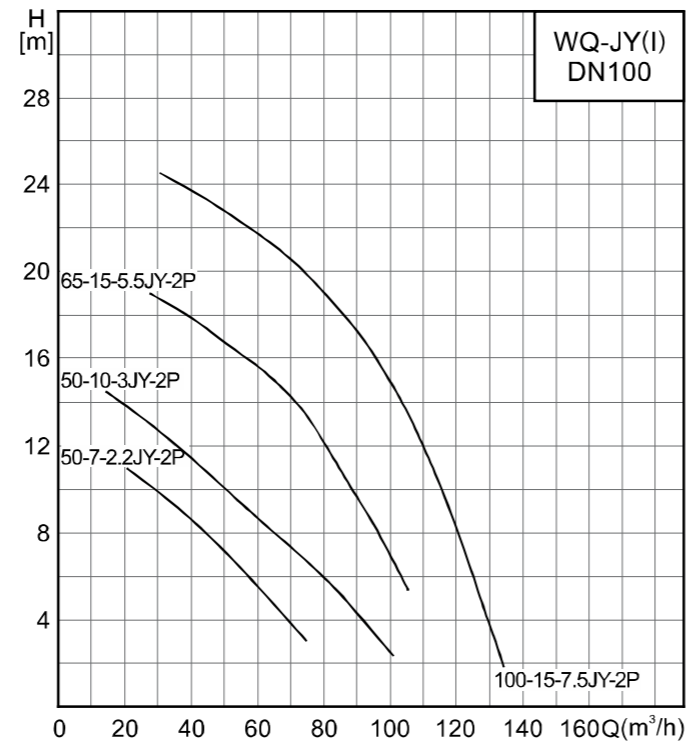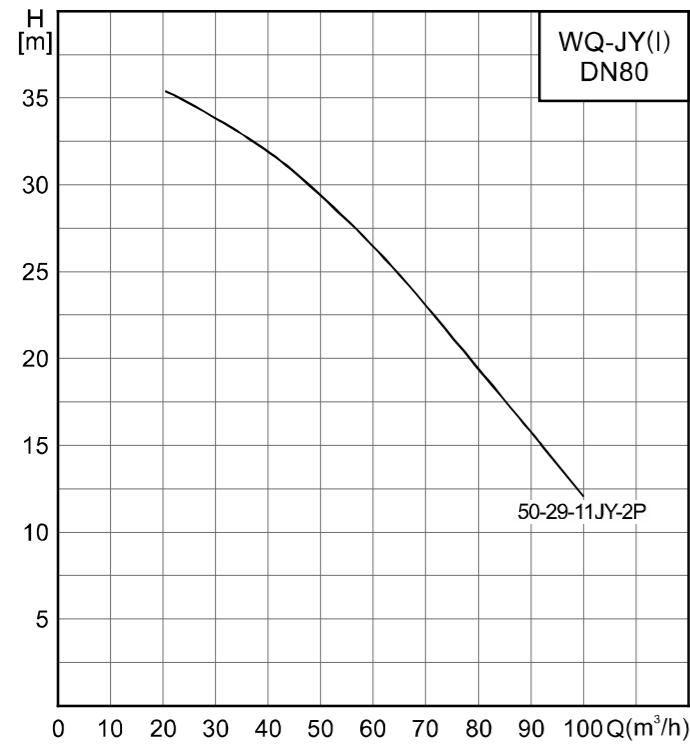


Performance curve

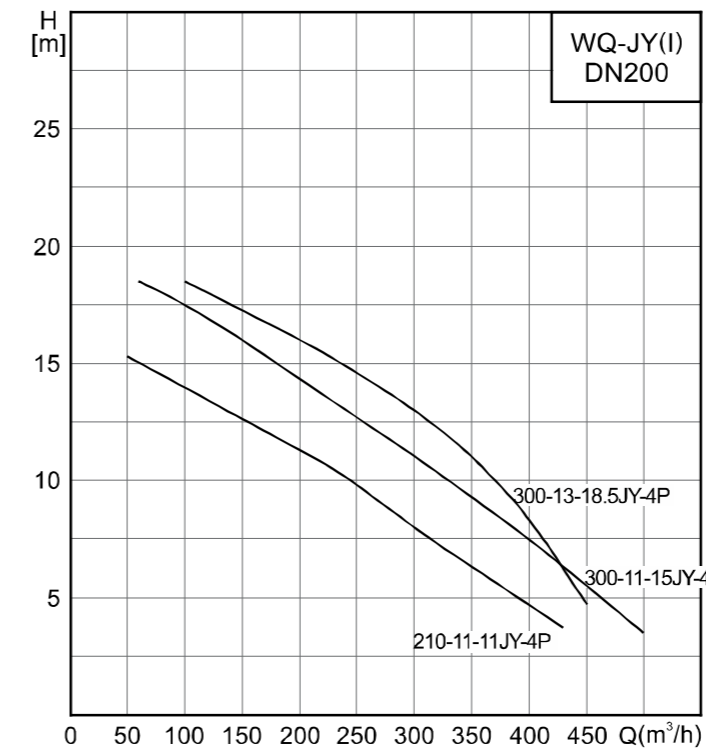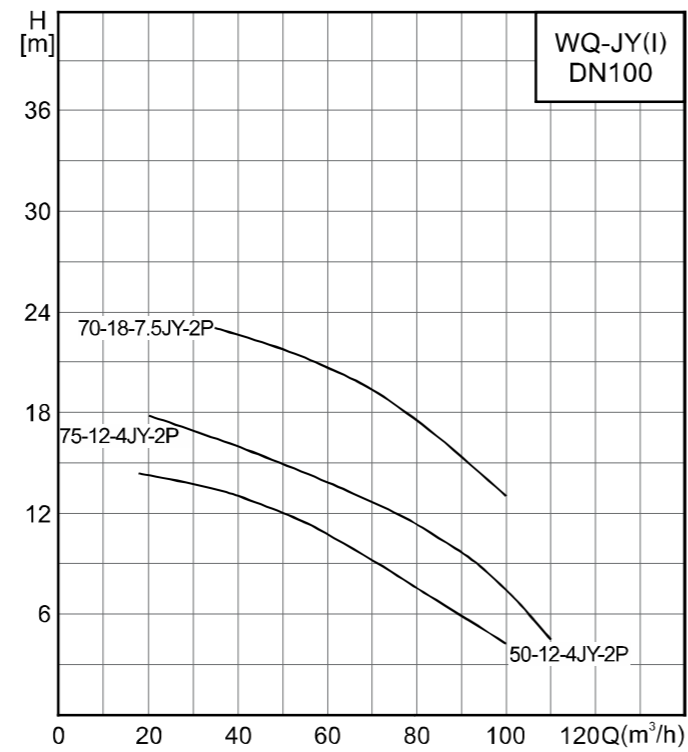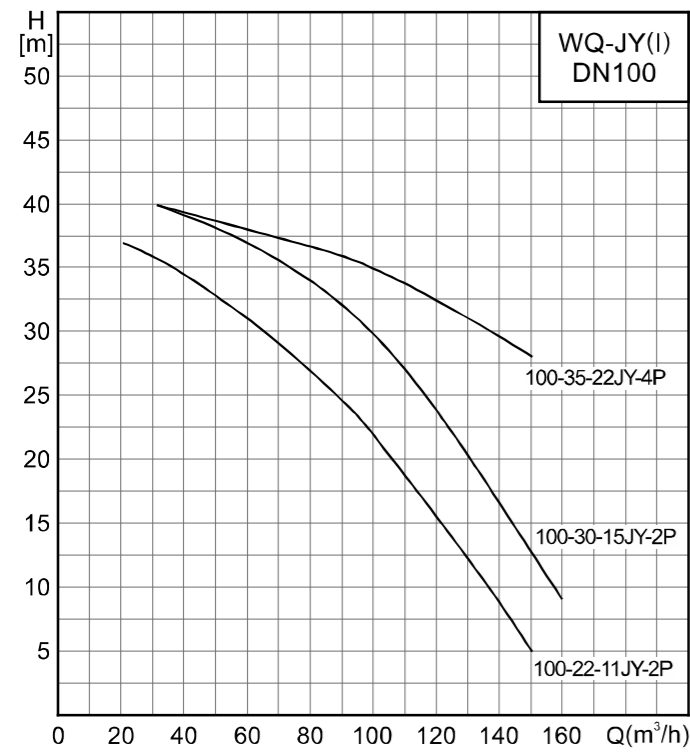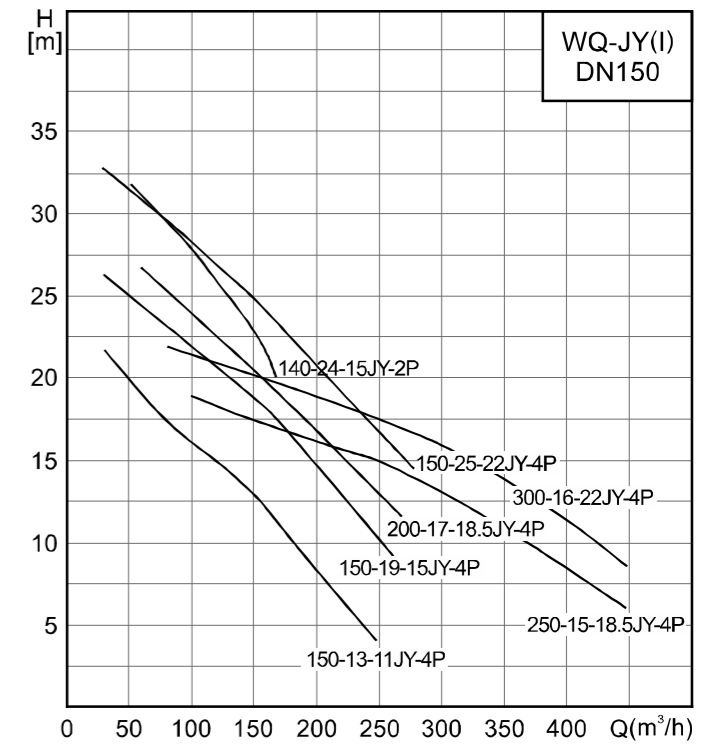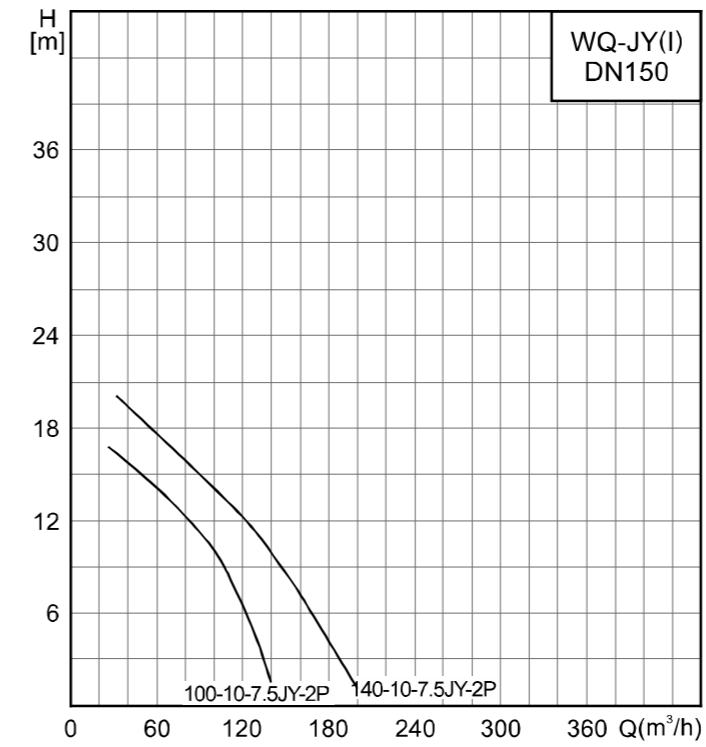

WQ-QG(I) cutting type submersible sewage pump

Cutting type pump with 2-pole motor

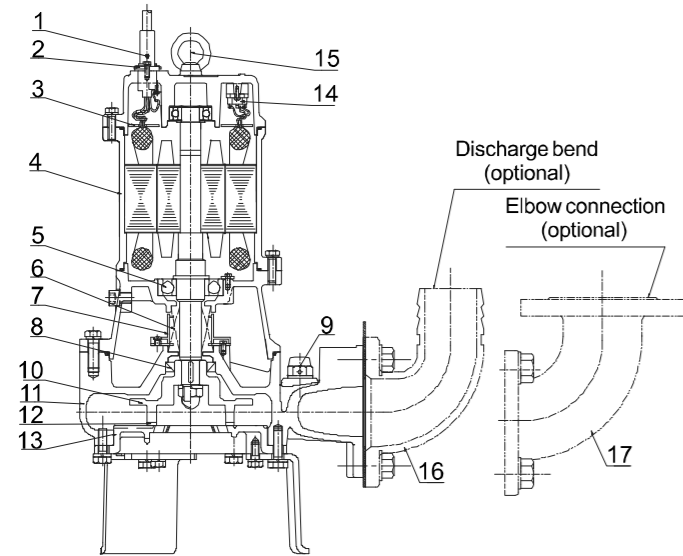

With the reasonable structure of cutting type, the pump is able to prevent clogging at the extreme. It consists of rotating impeller which with cutting blade and suction cover which with zigzag fixed gear. The edge of blade and zigzag cover will move in the opposite direction when impeller rotates. It ensures the excellent cutting performance of the pump. Impeller and suction cover are produced by casting process which can improve the head of the pump.

| No. | Name | Material |
|-----|-----------------------------|---------------------------|
| 1 | Cable | YZW |
| 2 | Cable gland | / |
| 3 | Threading board | / |
| 4 | Electric motor | / |
| 5 | Bearing | / |
| 6 | Mechanical seal | Graphite/SIC SIC/SIC+C |
| 7 | Oil lifter | / |
| 8 | Oil seal | NBR1-2 |
| 9 | Air vent screw | Resin/others |
| 10 | Impeller | HT200 |
| 11 | Casing | HT200 |
| 12 | Cutting blade | Cemented carbide |
| 13 | Suction cover | QT600 |
| 14 | Circle thermal protector | / |
| 15 | Eye-bolt | / |
| 16 | Discharge bend (optional) | HT200 |
| 17 | Elbow connection (optional) | HT200 |




Technical data and dimensions

WQ-QG(I) cutting type submersible sewage pump

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max.Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|----------------------|------|---------------------|-----|-------|-------|---------------|---------------|---------------------------|--------|----------------|-----|-----|-----|-------|----------|
| | (mm) | (m ³ /h) | (m) | (rpm) | (kW) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | H3 | |
| 32WQ6-20-1.1QG(I) | 32 | 6 | 20 | 2850 | 1.1 | 380 | 2.6 | 12 | 23 | 398 | 270 | 157 | 237 | 82 | 无 |
| 50WQ10-10-0.75QG(I) | 50 | 10 | 10 | 2850 | 0.75 | 380 | 1.8 | 11 | 21.5 | 415 | 285 | 203 | 222 | 93 | TOS50 |
| 50WQ10-15-1.1QG(I) | 50 | 10 | 15 | 2850 | 1.1 | 380 | 2.6 | 13 | 22 | 415 | 280 | 201 | 238 | 93 | TOS50 |
| 50WQ15-15-1.5QG(I) | 50 | 15 | 15 | 2880 | 1.5 | 380 | 3.3 | 23 | 33 | 464 | 320 | 197 | 271 | 96.5 | TOS50 |
| 50WQ15-20-2.2QG(I) | 50 | 15 | 20 | 2880 | 2.2 | 380 | 4.6 | 12 | 37.5 | 510 | 320 | 216 | 279 | 107 | TOS50 |
| 50WQ15-28-3QG(I) | 50 | 15 | 28 | 2840 | 3 | 380 | 6.1 | 20 | 45 | 540 | 370 | 119 | 294 | 108.5 | TOS50 |
| 50WQ25-27-4QG(I) | 50 | 25 | 27 | 2840 | 4 | 380 | 7.7 | 22 | 50 | 556 | 420 | 221 | 337 | 111.5 | TOS50 |
| 80WQ25-15-2.2QG(I) | 80 | 25 | 15 | 2880 | 2.2 | 380 | 4.6 | 22 | 45 | 576 | 440 | 291 | 313 | 156.5 | TOS80 |
| 80WQ36-10-2.2QG-4(I) | 80 | 36 | 10 | 1413 | 2.2 | 380 | 5.5 | 47 | 56 | 643 | 500 | 308 | 363 | 168.5 | TOS80 |
| 80WQ40-12-3QG(I) | 80 | 40 | 12 | 2840 | 3 | 380 | 6.1 | 22 | 45 | 586 | 450 | 276 | 300 | 141 | TOS80 |
| 80WQ40-17-4QG(I) | 80 | 40 | 17 | 2840 | 4 | 380 | 7.7 | 22 | 48 | 609 | 465 | 292 | 313 | 156.5 | TOS80 |
| 80WQ60-11-4QG-4(I) | 80 | 60 | 11 | 1413 | 4 | 380 | 8.4 | 65 | 70 | 717 | 570 | 315 | 369 | 173.5 | TOS80 |
| 80WQ50-22-5.5QG(I) | 80 | 50 | 22 | 2940 | 5.5 | 380 | 10.8 | 23 | 85 | 879 | 570 | 320 | 410 | 185 | TOS80 |
| 80WQ45-29-7.5QG(I) | 80 | 45 | 29 | 2940 | 7.5 | 380 | 14.3 | 25 | 99 | 879 | 600 | 320 | 410 | 185 | TOS80 |
| 80WQ35-40-11QG(I) | 80 | 35 | 40 | 2930 | 11 | 380 | 21.7 | 25 | 130 | 927 | 660 | 320 | 410 | 185 | TOS80 |

※Please contact the salesman for overall dimension drawing. The dimensions of above table please refer to page 8.


Performance curve

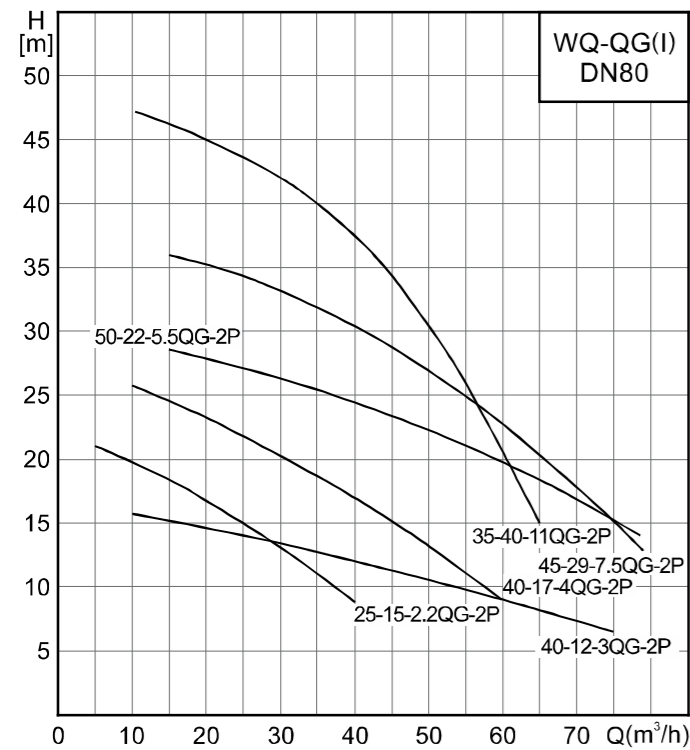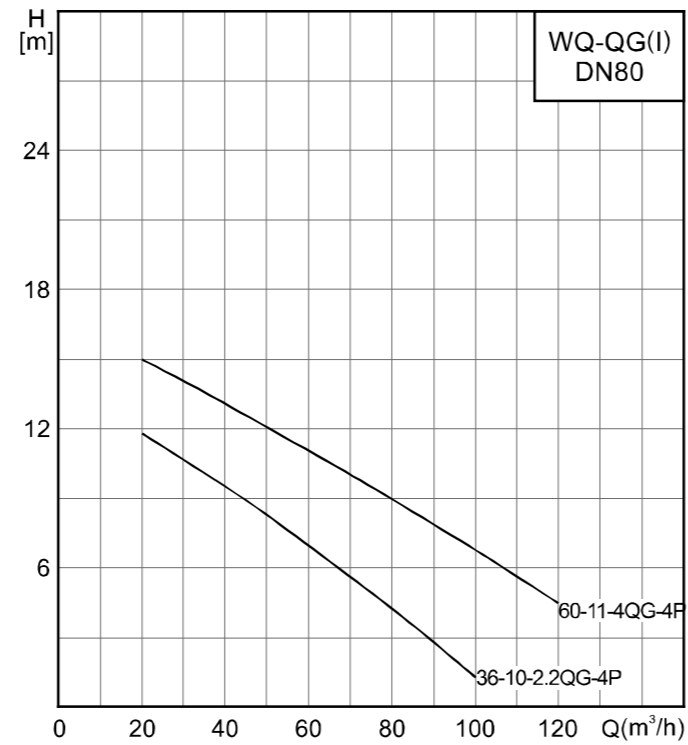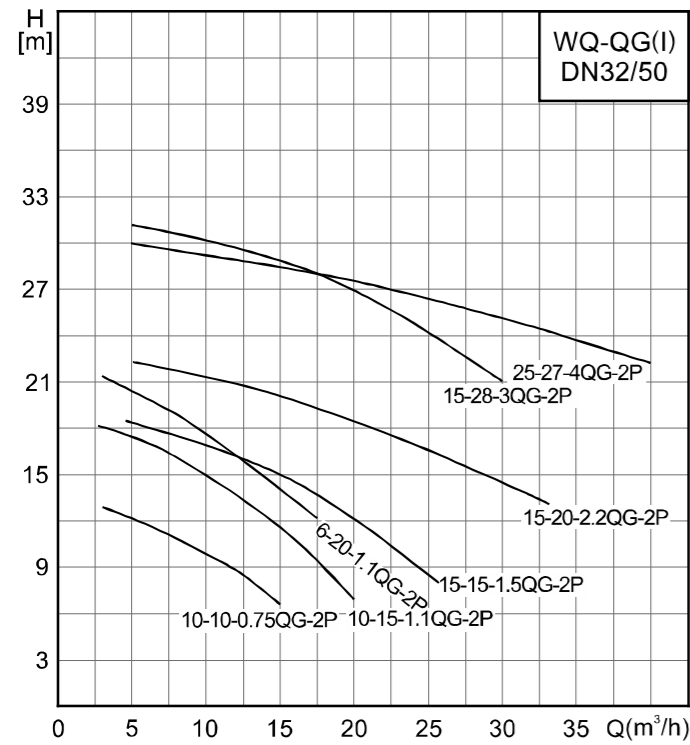

WQ-W(I) non-clogging cutting type submersible sewage pump

2-pole motor cutting pump

WQ-W(I) type

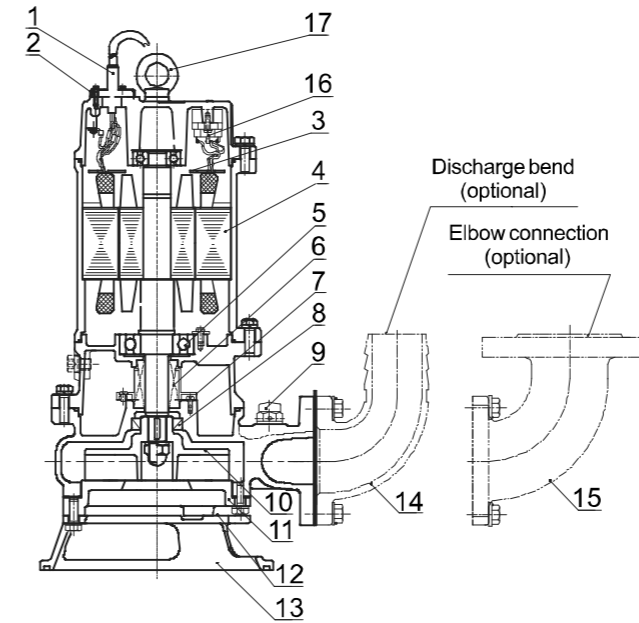

With the reasonable structure of cutting type, the pump is able to prevent clogging at the extreme. It consists of rotating impeller which with cutting blade and suction cover which with zigzag fixed gear. The edge of blade and zigzag cover will move in the opposite direction when impeller rotates. It ensures the excellent cutting performance of the pump, Impeller and suction cover are produced by casting process which can improve the head of the pump.





| No. | Name | Material |
|-----|-------------------------------|---------------------------|
| 1 | Cable | YZW |
| 2 | Cable gland (below 4KW) | SUS304 |
| | Cable gland (above 5.5KW) | HT200 |
| 3 | Threading board (below 4KW) | PPS |
| | Threading board (below 5.5KW) | Q235 |
| 4 | Electric motor | / |
| 5 | Bearing | / |
| 6 | Mechanical seal | Graphite/SIC SIC/SIC+C |
| 7 | Oil lifter | / |
| 8 | Oil seal | NBR1-2 |
| 9 | Air vent screw | Resin/others |
| 10 | Impeller | QT500 |
| 11 | Casing | HT200 |
| 12 | Non-clogging suction cover | QT500 |
| 13 | Non-clogging foot bracket | QT500 |
| 14 | Discharge bend (optional) | HT200 |
| 15 | Elbow connection (optional) | HT200 |
| 16 | Thermal protector | / |
| 17 | Eye-bolt | / |

Technical data and dimensions



WQ-W(I) non-clogging cutting type submersible sewage pump

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max.Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|----------------------|------|--------|-----|-------|-------|---------------|---------------|---------------------------|--------|----------------|-----|-----|-----|-------|----------|
| | (mm) | (m³/h) | (m) | (rpm) | (kW) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | H3 | |
| 40WQ9-5-0.37W(I) | 40 | 9 | 5 | 2800 | 0.37 | 380 | 1.0 | 15 | 16 | 374 | 260 | 169 | 184 | 79 | WT40 |
| 40WQ10-7-0.55W(I) | 40 | 10 | 7 | 2850 | 0.55 | 380 | 1.2 | 15 | 20 | 420 | 285 | 189 | 222 | 99 | TOS40 |
| 40WQ10-10-0.75W(I) | 40 | 10 | 10 | 2850 | 0.75 | 380 | 1.8 | 15 | 23 | 420 | 285 | 189 | 222 | 99 | TOS40 |
| 40WQ12-15-1.5W(I) | 40 | 12 | 15 | 2880 | 1.5 | 380 | 3.3 | 18 | 35 | 478 | 340 | 202 | 269 | 112 | TOS40 |
| 50WQ10-13-1.1W(I) | 50 | 10 | 13 | 2850 | 1.1 | 380 | 2.6 | 18 | 27 | 443 | 330 | 217 | 241 | 107.5 | TOS50 |
| 50WQ10-7-0.55W(I) | 50 | 10 | 7 | 2850 | 0.55 | 380 | 1.2 | 15 | 20 | 420 | 285 | 209 | 222 | 99 | TOS50 |
| 50WQ10-10-0.75W(I) | 50 | 10 | 10 | 2850 | 0.75 | 380 | 1.8 | 15 | 23 | 420 | 285 | 209 | 222 | 99 | TOS50 |
| 50WQ12-15-1.5W(I) | 50 | 12 | 15 | 2880 | 1.5 | 380 | 3.3 | 18 | 35 | 478 | 340 | 222 | 269 | 114 | TOS50 |
| 50WQ15-18-2.2W(I) | 50 | 15 | 18 | 2880 | 2.2 | 380 | 4.6 | 18 | 39 | 517 | 370 | 224 | 283 | 114 | TOS50 |
| 50WQ15-25-3W(I) | 50 | 15 | 25 | 2840 | 3 | 380 | 6.1 | 20 | 47 | 547 | 400 | 225 | 283 | 115 | TOS50 |
| 50WQ25-25-4W(I) | 50 | 25 | 25 | 2840 | 4 | 380 | 7.7 | 18 | 52 | 593 | 450 | 257 | 298 | 147 | TOS50 |
| 50WQ18-32-5.5W(I) | 50 | 18 | 32 | 2940 | 5.5 | 380 | 10.8 | 18 | 86 | 814 | 540 | 244 | 324 | 133.5 | TOS50 |
| 65WQ15-10-1.1W(I) | 65 | 15 | 10 | 2850 | 1.1 | 380 | 2.6 | 18 | 29 | 443 | 330 | 227 | 241 | 107.5 | TOS65 |
| 65WQ25-10-1.5W(I) | 65 | 25 | 10 | 2880 | 1.5 | 380 | 3.3 | 18 | 38 | 485 | 350 | 230 | 279 | 110 | TOS65 |
| 65WQ25-14-2.2W(I) | 65 | 25 | 14 | 2880 | 2.2 | 380 | 4.6 | 18 | 42 | 531 | 390 | 241 | 298 | 121 | TOS65 |
| 65WQ25-18-3W(I) | 65 | 25 | 18 | 2840 | 3 | 380 | 6.1 | 19 | 48 | 550 | 390 | 236 | 278 | 115.5 | TOS65 |
| 65WQ40-16-4W(I) | 65 | 40 | 16 | 2840 | 4 | 380 | 7.7 | 18 | 52 | 598 | 470 | 270 | 298 | 149.5 | TOS65 |
| 65WQ30-25-5.5W(I) | 65 | 30 | 25 | 2940 | 5.5 | 380 | 10.8 | 20 | 87 | 824 | 590 | 270 | 324 | 149.5 | TOS65 |
| 80WQ40-8-2.2W(I) | 80 | 40 | 8 | 2880 | 2.2 | 380 | 4.6 | 22 | 49 | 548 | 400 | 259 | 296 | 124 | TOS80 |
| 80WQ35-13-3W(I) | 80 | 35 | 13 | 2840 | 3 | 380 | 6.1 | 19 | 51 | 575 | 430 | 265 | 283 | 130.5 | TOS80 |
| 80WQ50-12-4W(I) | 80 | 50 | 12 | 2840 | 4 | 380 | 7.7 | 15 | 55 | 598 | 450 | 285 | 303 | 150 | TOS80 |
| 80WQ40-22-5.5W(I) | 80 | 40 | 22 | 2940 | 5.5 | 380 | 10.8 | 20 | 87 | 825 | 590 | 285 | 324 | 149.5 | TOS80 |
| 100WQ50-10-3W(I) | 100 | 50 | 10 | 2840 | 3 | 380 | 6.1 | 19 | 50 | 575 | 430 | 281 | 311 | 130.5 | TOS100 |
| 100WQ60-11-4W(I) | 100 | 60 | 11 | 2840 | 4 | 380 | 7.7 | 18 | 55 | 630 | 500 | 315 | 303 | 165 | TOS100 |
| 100WQ65-15-5.5W(I) | 100 | 65 | 15 | 2940 | 5.5 | 380 | 10.8 | 24 | 92 | 857 | 560 | 315 | 334 | 165 | TOS100 |
| 65WQ45-28-7.5W(I) | 65 | 45 | 28 | 2940 | 7.5 | 380 | 14.3 | 33 | 100 | 855 | 590 | 316 | 351 | 149.5 | TOS65 |
| 100WQ70-17-7.5W(I) | 100 | 70 | 17 | 2940 | 7.5 | 380 | 14.3 | 33 | 100 | 855 | 590 | 316 | 351 | 165.5 | TOS100 |
| 150WQ140-10-7.5W(I) | 150 | 140 | 10 | 2940 | 7.5 | 380 | 14.3 | 35 | 120 | 890 | 620 | 383 | 390 | 172.5 | TOS150 |
| 150WQ140-14-11W-4(I) | 150 | 140 | 14 | 1440 | 11 | 380 | 22.9 | 52 | 216 | 1097 | 750 | 535 | 575 | 325 | TOS150 |
| 200WQ210-10-11W-4(I) | 200 | 210 | 10 | 1440 | 11 | 380 | 22.9 | 63 | 255 | 1113 | 760 | 530 | 568 | 320 | TO200 |
| 150WQ200-16-15W-4(I) | 150 | 200 | 16 | 1440 | 15 | 380 | 30.6 | 57 | 237 | 1167 | 800 | 535 | 572 | 325 | TOS150 |
| 200WQ300-10-15W-4(I) | 200 | 300 | 10 | 1440 | 15 | 380 | 30.6 | 64 | 260 | 1184 | 810 | 535 | 546 | 320 | TO200 |





Performance curve

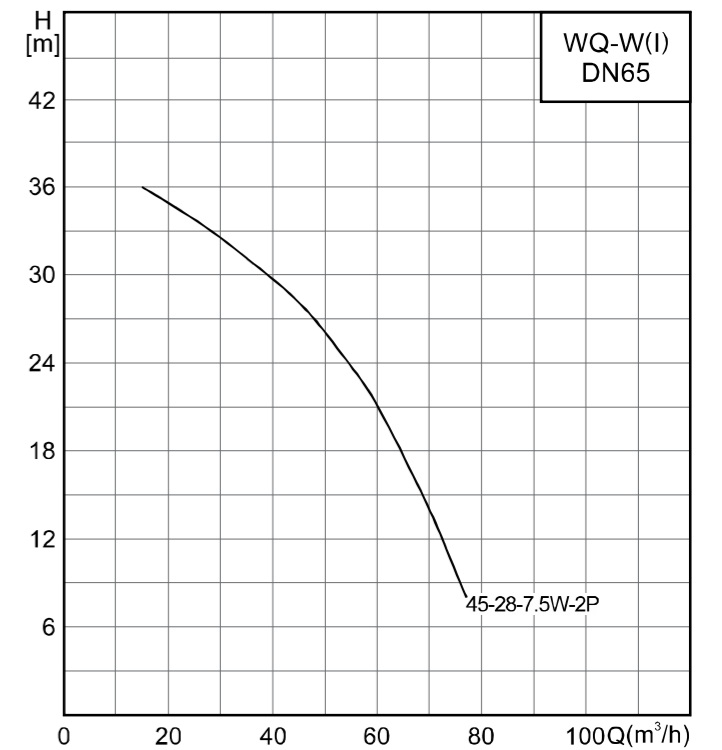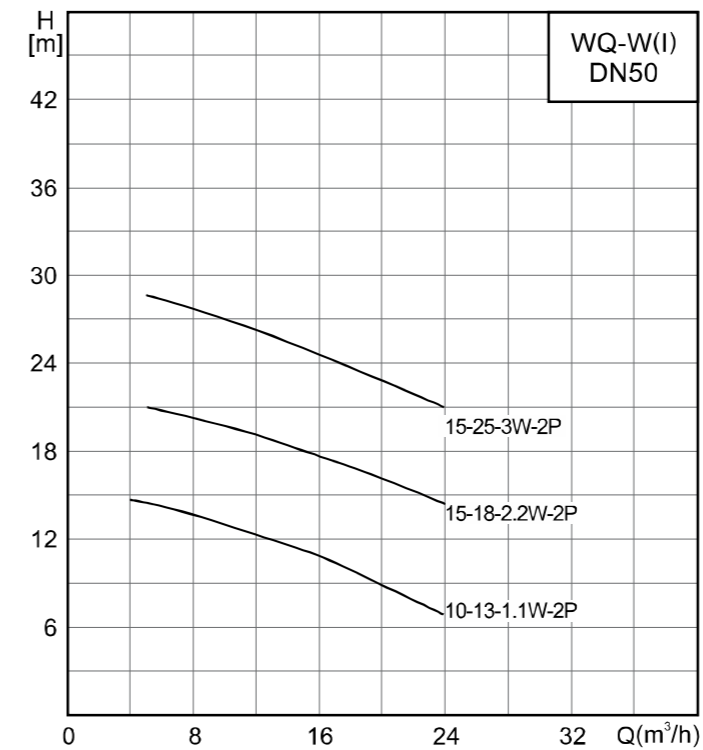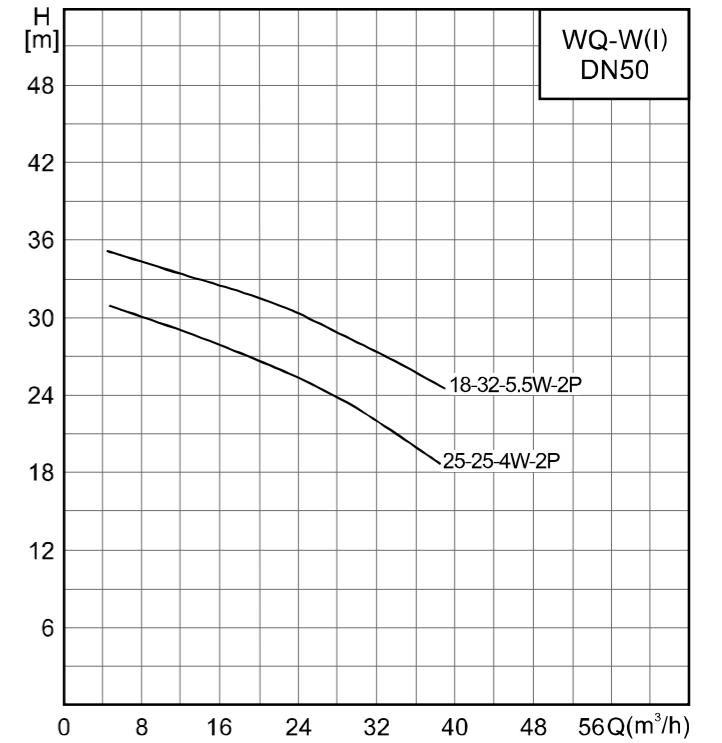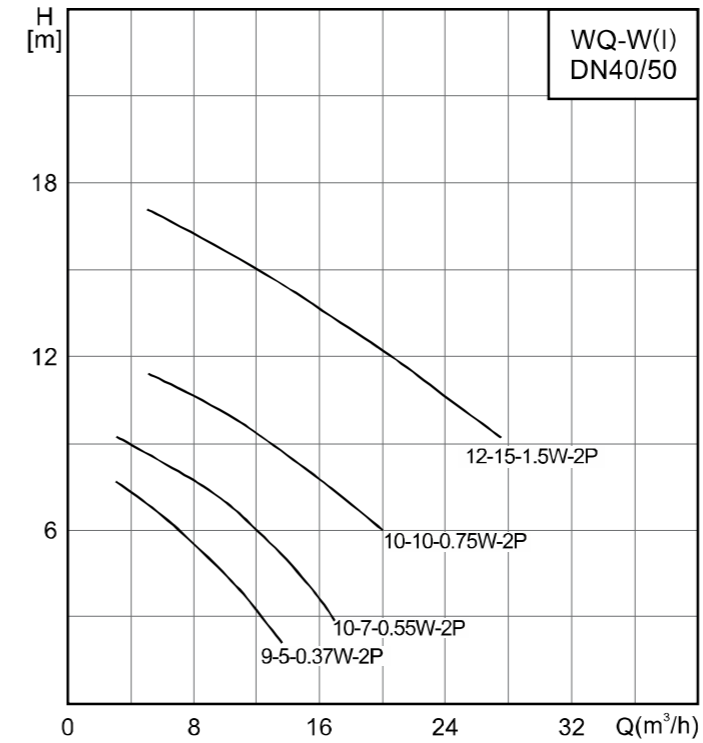

Performance curve

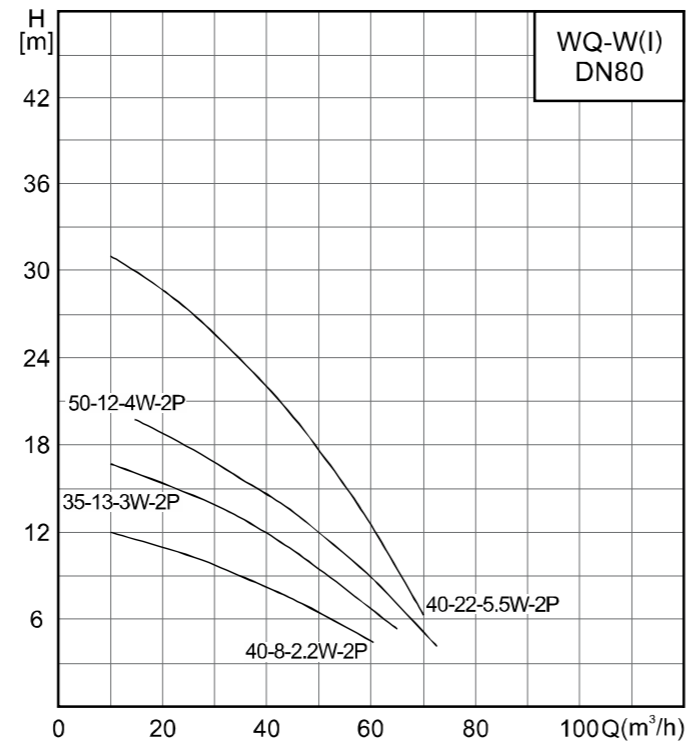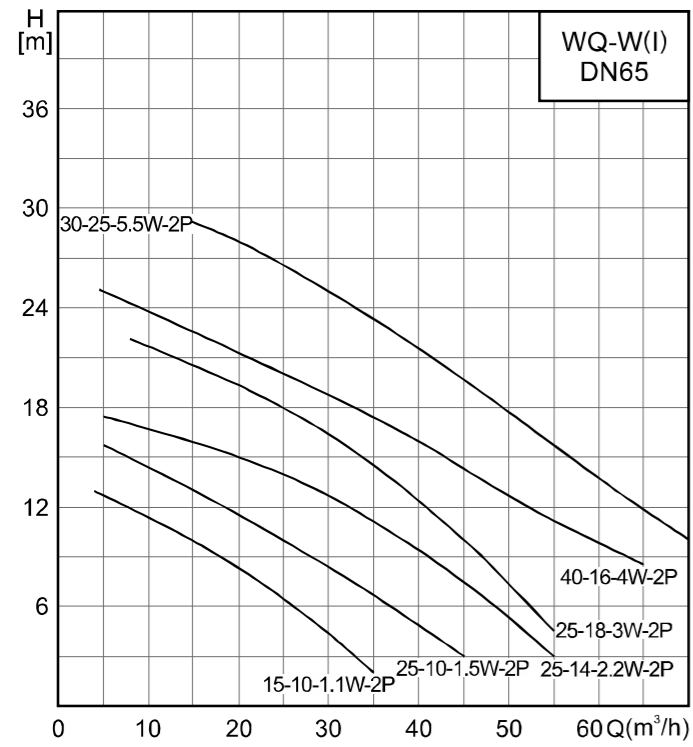


Performance curve

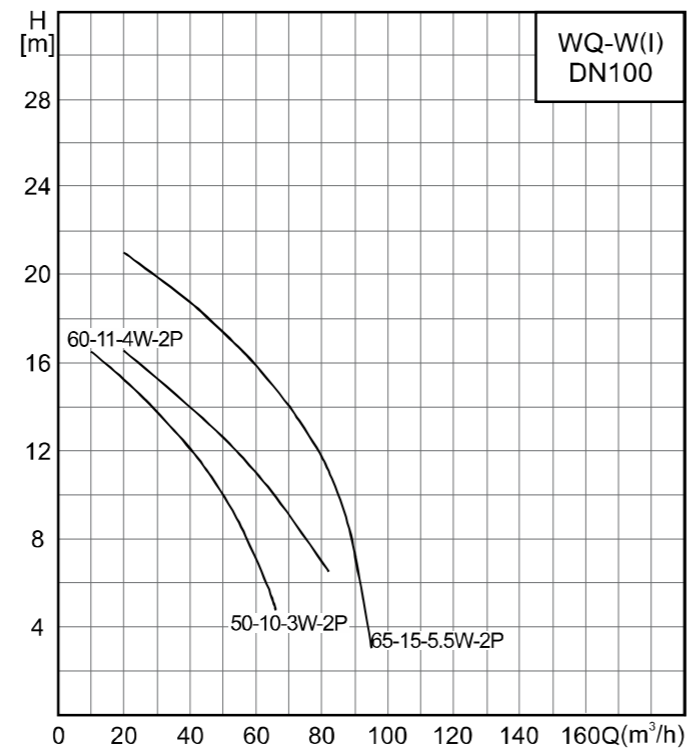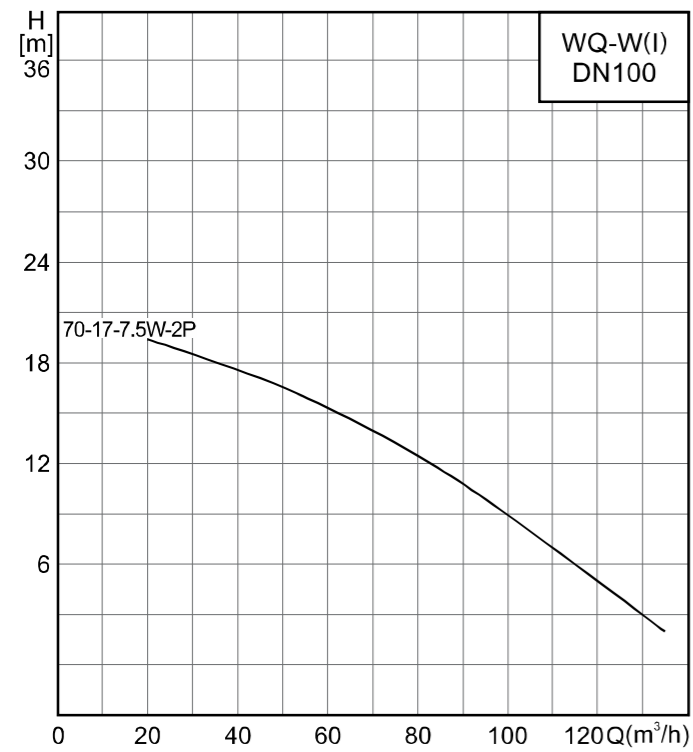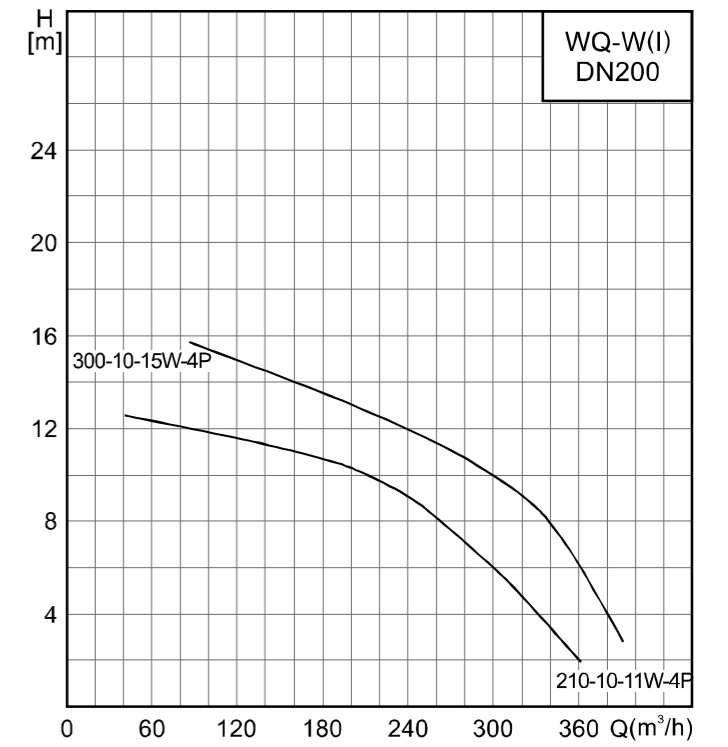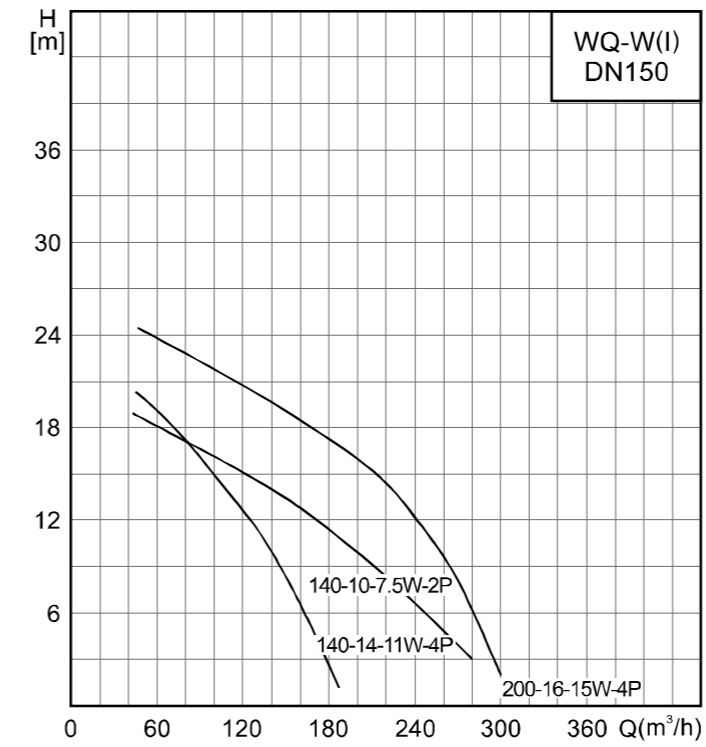


WQ-X(I) series vortex type submersible sewage pump

2-pole motor vortex pump

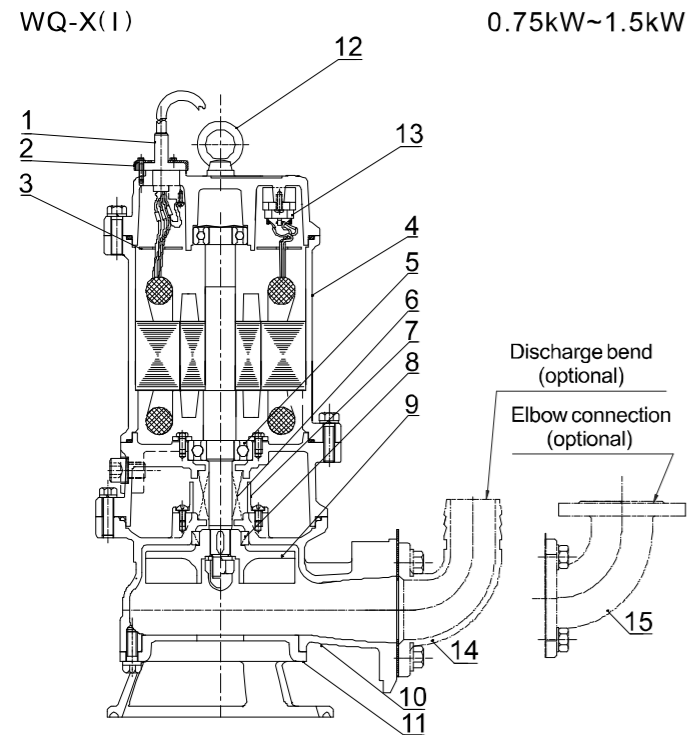

0.75kW~1.5kW

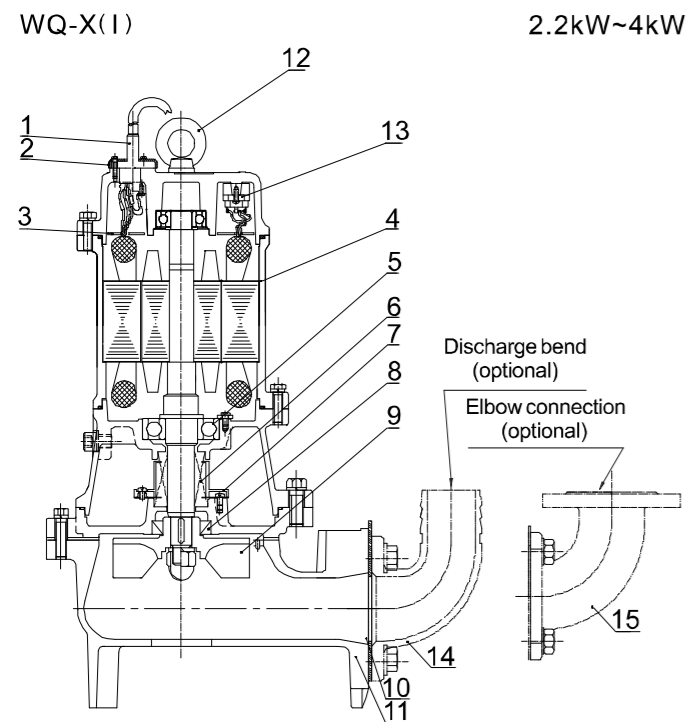

2.2kW~4kW

| No. | Name | Material |
|-----|-----------------------------|---------------------------|
| 1 | Cable | YZW |
| 2 | Cable gland | / |
| 3 | Threading board | / |
| 4 | Base | HT200 |
| 5 | Bearing | / |
| 6 | Mechanical seal | Graphite/SIC SIC/SIC+C |
| 7 | Oil lifter | / |
| 8 | Oil seal | NBR1-2 |
| 9 | Impeller | HT200 |
| 10 | Casing | HT200 |
| 11 | Suction cover | HT200 |
| 12 | Eye-bolt | / |
| 13 | Thermal protector | / |
| 14 | Discharge bend (optional) | HT200 |
| 15 | Elbow connection (optional) | HT200 |




The water pump adopts a swirling impeller structure, and the impeller is in the upper part of the pump body flow passage, so that it has good passability, avoiding blockage of the internal flow passage. So it's suitable for working condition in which liquid contains large particles and where conventional water pump is blocked.

Technical data and dimensions

WQ-X(I) vortex type submersible sewage pump


| Model | Dia. | Q | Speed | Power | Rated voltage | Rated current | Max. Dia. of passing solid | Weight | Dimensions(mm) | | | | | Coupling |
|-------------------|------|---------------------|-------|-------|---------------|---------------|----------------------------|--------|----------------|-----|-----|-----|----|----------|
| | (mm) | (m ³ /h) | (m) | (rpm) | (kW) | (A) | (mm) | (kg) | H | H1 | H2 | F | H3 | |
| 50WQX10-8-0.75(I) | 50 | 10 | 8 | 2850 | 0.75 | 1.8 | 37 | 23 | 432 | 287 | 177 | 215 | 77 | TOS50 |
| 50WQX12-10-1.5(I) | 50 | 12 | 10 | 2880 | 1.5 | 3.3 | 36 | 31 | 468 | 317 | 182 | 250 | 82 | TOS50 |
| 65WQX25-9-1.5(I) | 65 | 25 | 9 | 2880 | 1.5 | 3.3 | 47 | 36 | 490 | 340 | 207 | 250 | 87 | TOS65 |
| 80WQX35-9-2.2(I) | 80 | 35 | 9 | 2880 | 2.2 | 4.6 | 56 | 50 | 545 | 390 | 227 | 275 | 90 | TOS80 |
| 80WQX50-12-4(I) | 80 | 50 | 12 | 2840 | 4 | 7.7 | 56 | 58 | 575 | 415 | 230 | 280 | 90 | TOS80 |

Performance curve

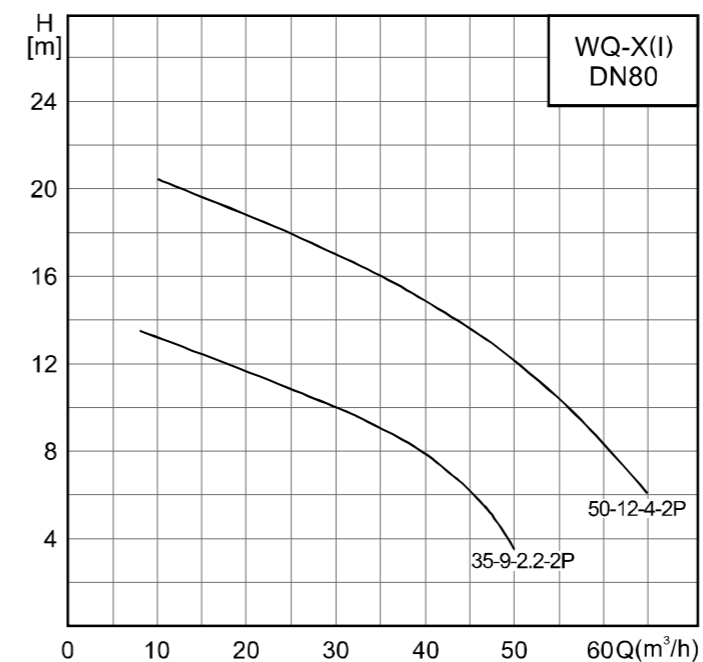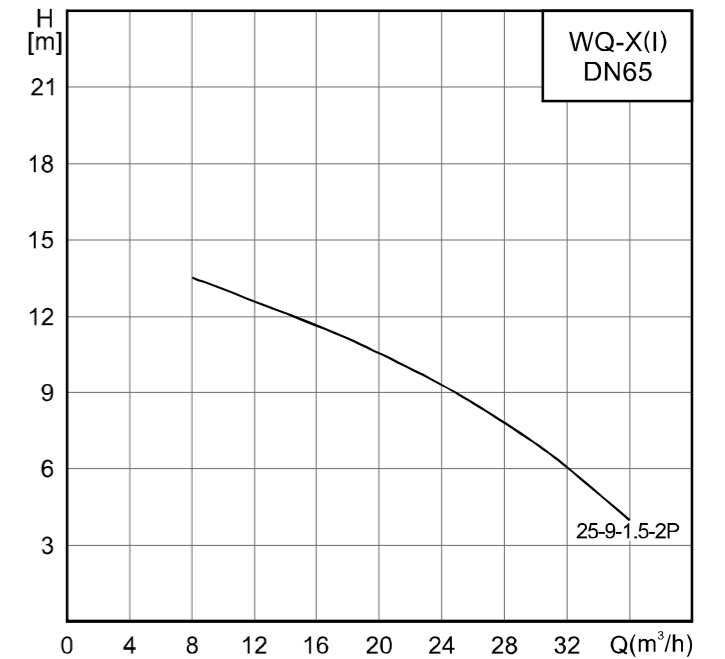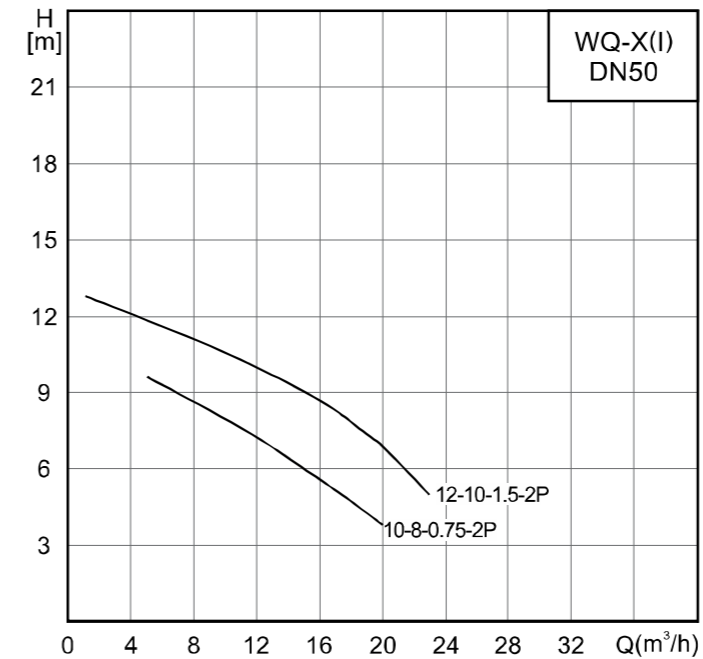

WQ-H(I) high head large solid passing submersible pump

4-pole motor high head pump

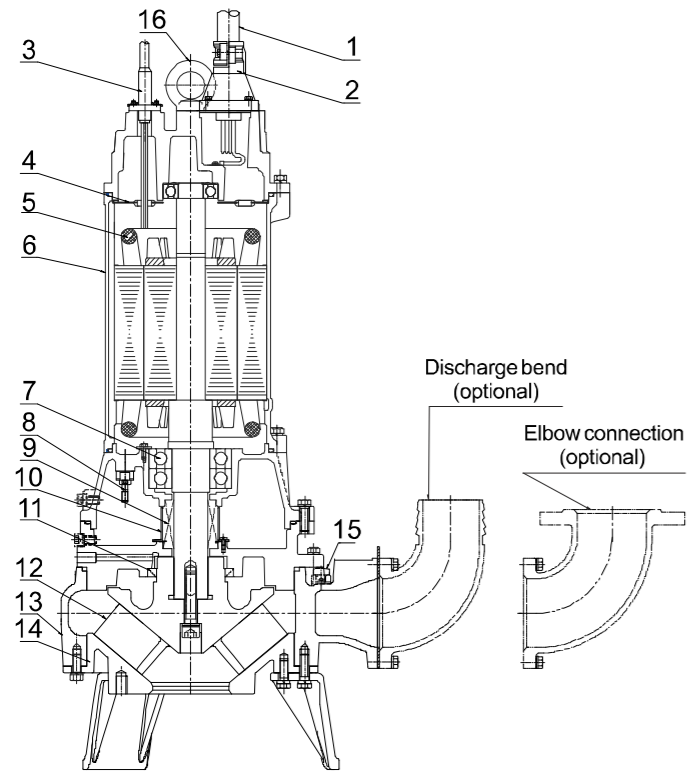



| No. | Name | Material |
|-----|-----------------------------|---------------------------|
| 1 | Main cable | YZW |
| 2 | Cable gland | / |
| 3 | Deputy cable | YZW |
| 4 | Threading board | / |
| 5 | Thermal protector | / |
| 6 | Base | HT200 |
| 7 | Bearing | / |
| 8 | Leakage protector | / |
| 9 | Mechanical seal | Graphite/SIC SIC/SIC+C |
| 10 | Oil lifter | Resin/Others |
| 11 | Oil seal | NBR |
| 12 | Impeller | HT200 |
| 13 | Pump body | HT200 |
| 14 | Suction cover | HT200 |
| 15 | Automatic air release valve | Resin/Others |
| 16 | Eye-bolt | / |

The specially designed impeller makes the pump have a higher lift and passability, and the performance is improved by 20%. The impeller used is a semi-open impeller, which has a good function of preventing clogging.

Technical data and dimensions

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max. Dia. of passing solid | Weight | Dimensions(mm) | | | | Coupling |
|------------------------|------|---------------------|-----|-------|-------|---------------|---------------|----------------------------|--------|----------------|-----|-----|-----|----------|
| | (mm) | (m ³ /h) | (m) | (rpm) | (kW) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | |
| 80WQ60-28-11H-4(I) | 80 | 60 | 28 | 1440 | 11 | 380 | 22.9 | 45 | 265 | 1030 | 800 | 330 | 565 | TOS80F |
| 80WQ60-35-15H-4(I) | 80 | 60 | 35 | 1440 | 15 | 380 | 30.6 | 45 | 265 | 1030 | 800 | 330 | 565 | TOS80F |
| 80WQ60-40-18.5H-4(I) | 80 | 60 | 40 | 1460 | 18.5 | 380 | 36.9 | 45 | 350 | 1200 | 870 | 330 | 600 | TOS80F |
| 80WQ80-43-22H-4(I) | 80 | 80 | 43 | 1460 | 22 | 380 | 43.1 | 45 | 350 | 1200 | 870 | 330 | 600 | TOS80F |
| 100WQ100-22-11H-4(I) | 100 | 100 | 22 | 1440 | 11 | 380 | 22.9 | 55 | 270 | 1085 | 850 | 420 | 560 | TOS100F |
| 100WQ100-29-15H-4(I) | 100 | 100 | 29 | 1440 | 15 | 380 | 30.6 | 55 | 270 | 1085 | 850 | 420 | 560 | TOS100F |
| 100WQ100-32-18.5H-4(I) | 100 | 100 | 32 | 1460 | 18.5 | 380 | 36.9 | 55 | 330 | 1255 | 950 | 420 | 560 | TOS100F |
| 100WQ100-34-22H-4(I) | 100 | 100 | 34 | 1460 | 22 | 380 | 43.1 | 55 | 330 | 1255 | 950 | 420 | 560 | TOS100F |


Performance curve

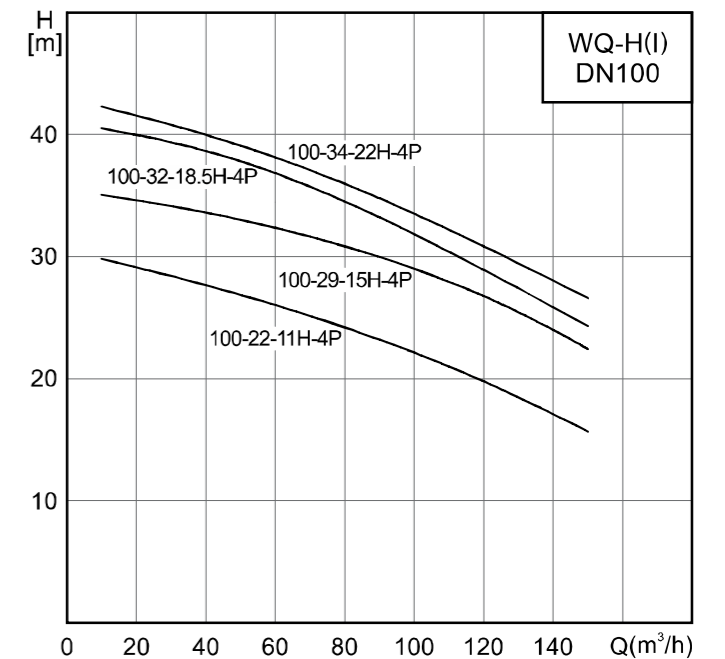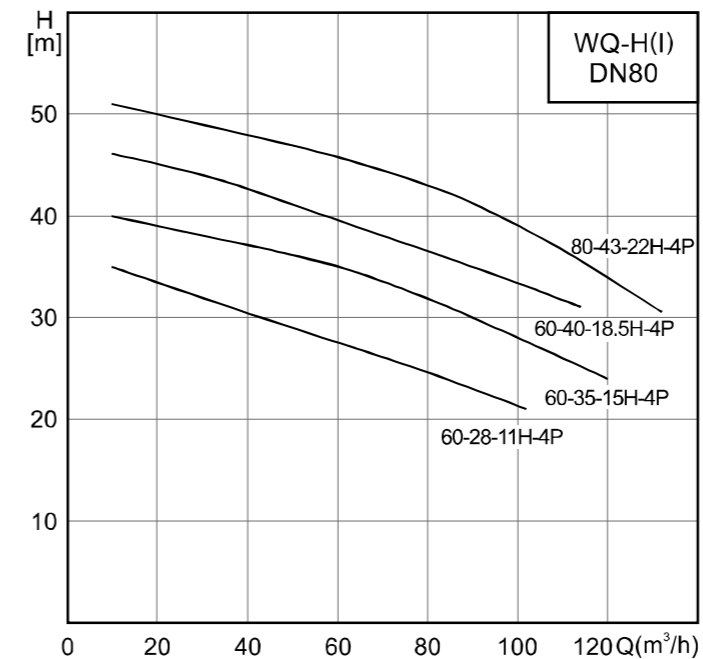

SHP type submersible sewage pump

2-pole motor small-flow high-head pump

22kW~75kW

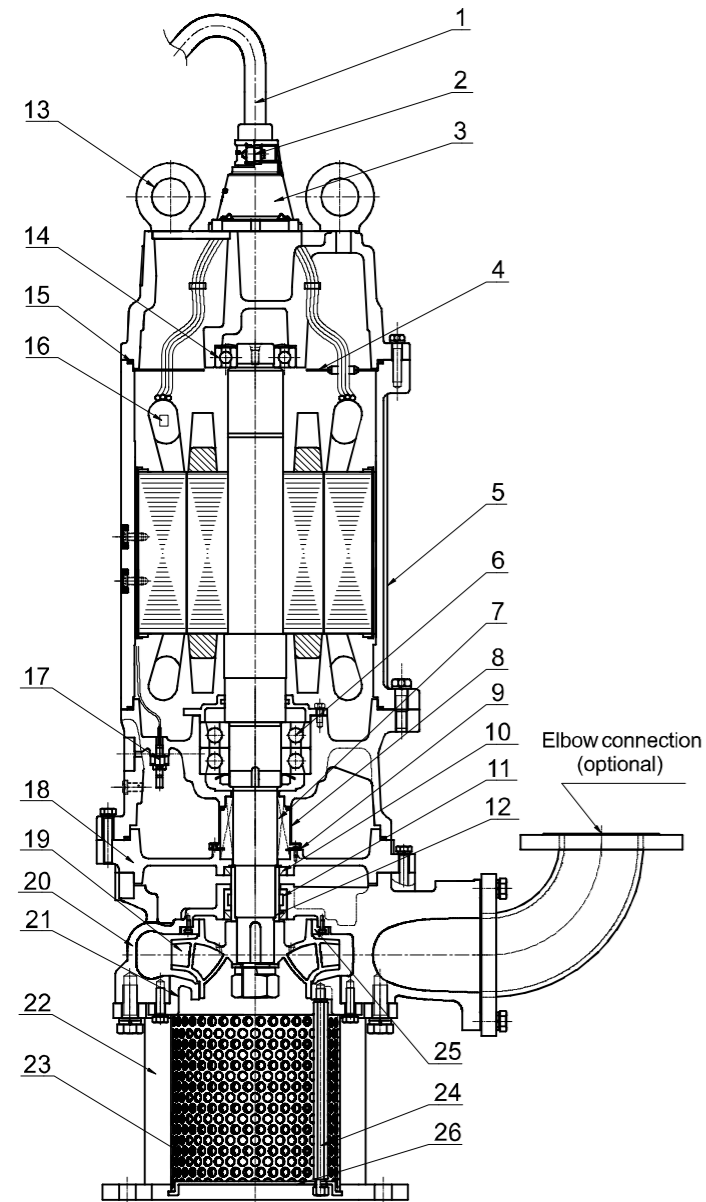

| No. | Name | Material |
|-----|---------------------------------|---|
| 1 | Cable | YCW |
| 2 | Compression gland locking piece | HT200 |
| 3 | Cable gland | HT200 |
| 4 | Threading board | Q235 |
| 5 | Motor | - |
| 6 | Lower bearing | NSK Angular Contact Ball Bearing (Imported) |
| 7 | Mechanical seal | Burgmann Japan |
| 8 | Oil lifter | - |
| 9 | Seal gland | Q235 |
| 10 | Skeleton seal ring | NBR |
| 11 | U-shaped shaft sleeve | 2Cr13 |
| 12 | Shaft sleeve | 2Cr13 |
| 13 | Eye-bolt | 20#steel |
| 14 | Upper bearing | NSK Deep Groove Ball Bearing (Imported) |
| 15 | O-ring | NBR |
| 16 | Micro thermal protector | - |
| 17 | Tsurumi immersion electrode | - |
| 18 | Pump upper cover | HT200 |
| 19 | Impeller | SUS304 |
| 20 | Pump body | QT600 |
| 21 | Inlet cover | QT600 |
| 22 | Foot bracket | Q235 |
| 23 | Strainer | SUS304 |
| 24 | Double-ended bolt | SUS304 |
| 25 | Upper wear ring | SUS304 |
| 26 | Base plate | SUS304 |

This pump is designed for high-head applications. Equipped with a filtration system, it effectively prevents debris from entering the pump chamber, though with a relatively smaller maximum particle passage size.



* Note: Models with 22kW-37kW power ratings do not include an "upper wear ring".

Technical data and dimensions

| Model | Dia. | Q | H | Speed | Power | Rated voltage | Rated current | Max. Dia. of passing solid | Weight | Dimensions(mm) | | | | | | Coupling |
|-----------------|------|---------------------|-----|-------|-------|---------------|---------------|----------------------------|--------|----------------|------|-----|-----|-----|-----|----------|
| | (mm) | (m ³ /h) | (m) | (rpm) | (kW) | (V) | (A) | (mm) | (kg) | H | H1 | H2 | F | F1 | H3 | |
| 65SHP60-53-22 | 65 | 60 | 53 | 2955 | 22 | 380 | 41.4 | 12 | 283 | 1450 | 896 | 355 | 465 | 640 | 250 | TOS-65H |
| 65SHP60-70-30 | 65 | 60 | 70 | 2965 | 30 | 380 | 54.9 | 12 | 305 | 1450 | 896 | 355 | 465 | 640 | 250 | TOS-65H |
| 65SHP60-82-37 | 65 | 60 | 82 | 2965 | 37 | 380 | 67.1 | 12 | 322 | 1450 | 896 | 355 | 465 | 640 | 250 | TOS-65H |
| 100SHP150-55-45 | 100 | 150 | 55 | 2965 | 45 | 380 | 82.5 | 12 | 425 | 1650 | 1072 | 497 | 528 | 751 | 332 | TOS-100H |
| 100SHP150-68-55 | 100 | 150 | 68 | 2965 | 55 | 380 | 99.5 | 12 | 455 | 1650 | 1072 | 497 | 528 | 751 | 332 | TOS-100H |
| 100SHP150-79-75 | 100 | 150 | 79 | 2970 | 75 | 380 | 133.8 | 12 | 525 | 1720 | 1142 | 497 | 528 | 751 | 332 | TOS-100H |

Note: This series complies to Q/HHN 003-2024 enterprise standard.

Performance curve

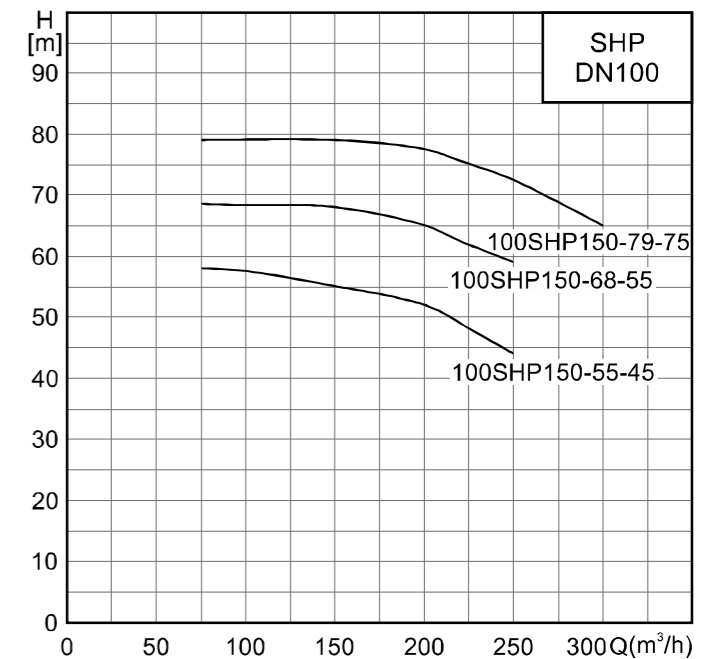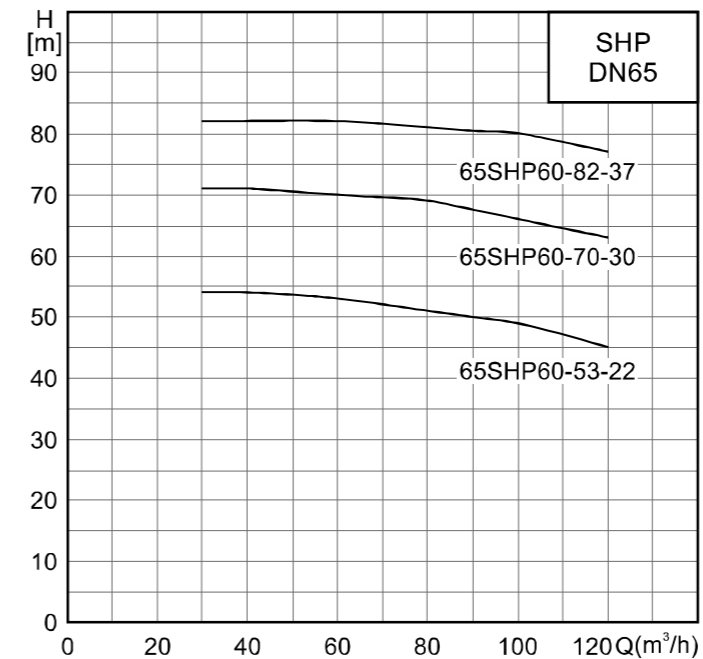

Coupling installation and pump outlet flange dimension

(fit for 2P small-flow high-head pump)

Measure:mm

| No. | Diameter | Flange connection size | | | | Coupling base dimension(mm) | | | | | | L | L1 | L2 | L3 | L4 | L5 |
|-----|---------------------|------------------------|-----|-------|-------|-----------------------------|-----|-----|-----|-------|-------|-----|-----|-----|-----|-----|----|
| | | D | D1 | n1×d1 | n1×Md | A | B | B1 | B2 | B3 | n2×d2 | | | | | | |
| 1 | DN65 (TOS-65H) | 185 | 145 | 4-Ø19 | 4-M16 | 220 | 250 | 170 | 170 | 2-Ø14 | 4-Ø18 | 580 | 85 | 195 | 230 | 155 | 55 |
| 2 | DN100 (TOS-100H) | 220 | 180 | 8-Ø19 | 8-M16 | 250 | 290 | 200 | 200 | 2-Ø15 | 4-Ø18 | 670 | 135 | 245 | 300 | 161 | 70 |

For small-flow high-head pumps, foot-mounted coupling installation is adopted, with all flanges rated for 10kg pressure class.

Relevant dimensions


Measure: mm(except for inch)

| Item | Diameter | |
|---|-----------------------|---------------------|
| | DN65 (TOS-65H) | DN100 (TOS-100H) |
| Guide pipe size Tap water pipe/seamless steel pipe | 1-1/4"/42×3.0 DN32 | 2"/60×3.25 DN50 |
| Guide rod length | pool depth-271 | pool depth-327 |
| Quantity of expansion bolt and specification | 2-M10×120 | 2-M12×125 |
| Quantity of bolt and specification | 4-M16×250 | 4-M16×250 |
| Footer bolt hole size | 80×80×300 | 80×80×300 |
| Dia.of soft pipe(using scope) | DN65 | DN100 |


Installation methods of small-flow high-head pump

Installation methods of small-flow high-head pump

Fixed Automatic Coupling Installation Diagram

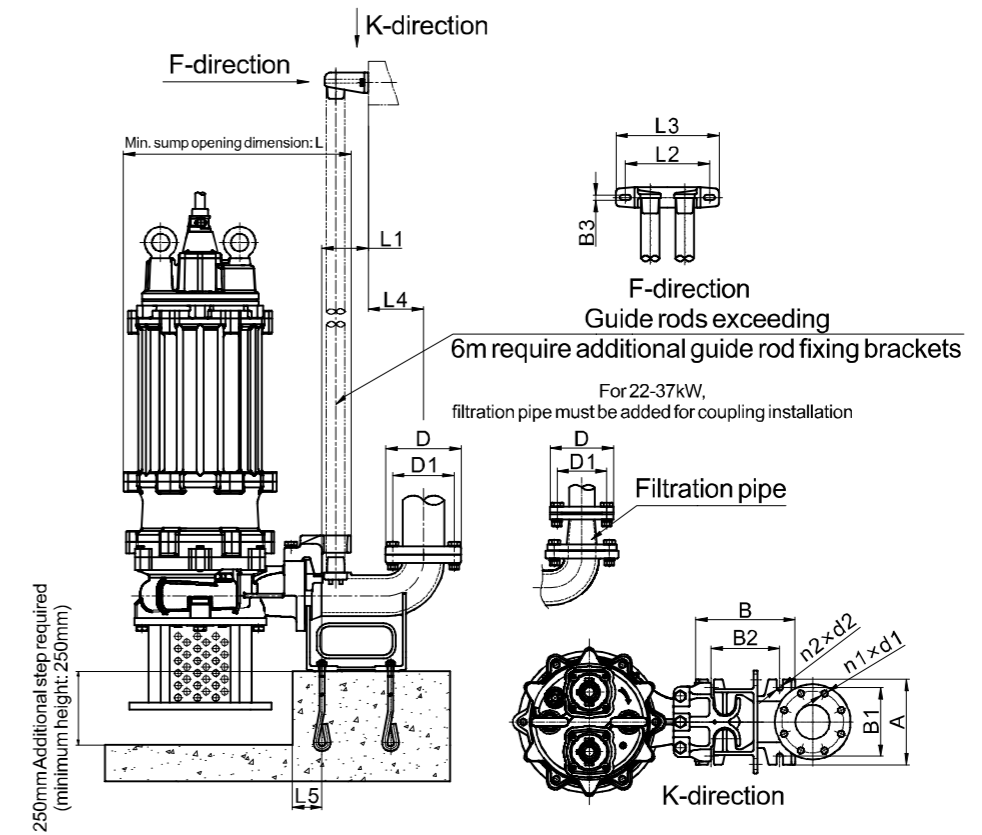

Mobile Installation Diagram

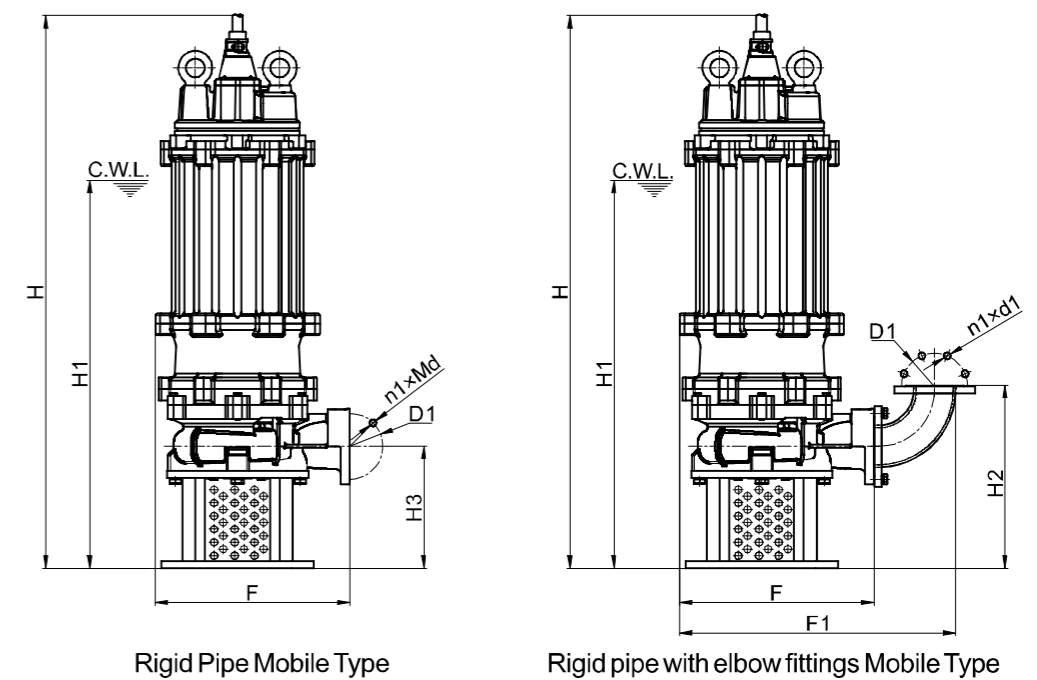

*C.W.L.: Min. operating water level for continuous operation

Table of pump models and oil capacities

| Pump model and power | Oil capacity(mL) | Remark | Pump model and power | Oil capacity(mL) | Remark |
|----------------------|------------------|--|----------------------|------------------|--------|
| 2P-0.37kW | 320 | | 4P-2.2kW | 1300 | |
| 2P-0.55/0.75/1.1kW | 500 | Fit for these model: 40/50WQ15-8-1.1(I) 40/50WQ15-13-1.1(I) 50WQ10-15-1.1QG(I) 50WQ15-12-1.1QG(I) 40/50WQ15-13-1.1JY(I) 40/50WQ15-8-1.1JY(I) | 4P-4kW | 1200 | |
| 2P-1.1kW | 670 | | 4P-5.5kW | 4200 | |
| 2P-1.5kW | 940 | | 4P-7.5kW | 4500 | |
| 2P-2.2kW | 1160 | | 4P-11kW | 5200 | |
| 2P-3kW | 1100 | | 4P-15kW | 5100 | |
| 2P-4kW | 1300 | | 4P-18.5/22kW | 4600 | |
| 2P-5.5kW | 2140 | | 4P-30kW | 8600 | |
| 2P-7.5/11/15kW | 2000 | | 4P-37/45kW | 9100 | |
| 2P-22/30/37kW | 4800 | | 4P-55/75kW | 9600 | |
| 2P-45/55/75kW | 8300 | | 4/6P-90-150kW | 25000 | |
| 6P-22/30/37kW | 9100 | | | | |
| 6P-45/55/75kW | 14000 | | | | |
| 8P-22kW | 9100 | | | | |

Summary(NH Series)

NH series control cabinets have the protection function of overload, short circuit and over current. With the working mode of single pump and multiple pump control, switching mode of main pump and stand-by pump, and various starting mode, they can apply to automatic control of water supply and drainage of agricultural production and buildings, fire control and spray network pressure boost.

With fine appearance, convenient installation and good quality, NH series electric control cabinets are reliable partner of all kinds of pumps.

Product features

1. Can be used in all kinds of situation like domestic sewage disposal.
2. Equipped with domestic and international famous brand and excellent cabinet body, well-designed, good in quality.
3. Combination by arbitrary selection, the product has various starting mode, control mode and switching mode.
4. Good service. Provide pre-sales consulting and after-sales service timely.


Operation condition and installation condition

1. Altitude shall not above 2000m, ambient temperature shall not above 45°C and less than -5°C, air relative humidity shall not more than 90% (if the temperature is 25°C).
2. No water drop, steam, afloat dust, metal particle, direct sunlight, high temperature, dust fall, corrosive gas, flammable gas or liquid.
3. No significant shake, shock and vibration.
4. Sweep condensation on product's surface which caused by temperature variation.
5. Vertical installation.

Power requirement

Power inlet: Three-phase-five-wire system
Power: 50HZ, 3PH380V

Definition of model

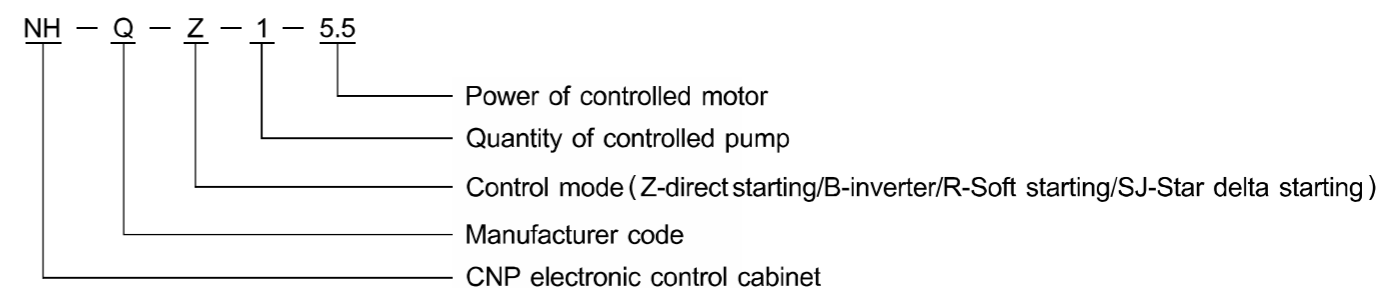

Supply range

| Installation method | Complete supply parts | Optional part | Spare parts |
|---------------------------------|--------------------------------------|---|---|
| Mobile hose installation | Main pump, hose connector | Hose | Impeller/Sealing ring/ Bearing/ Mechanical seal |
| Mobile pipe installation | Main pump, flanges | Double flange joints | |
| Automatic coupling installation | Main pump, automatic coupling device | Guide tube, anchor bolt, expansion bolt | |

Ordering Instructions

1. Please indicate product model, name, performance parameters (flow rate, head), installation method, options, spare parts, etc. when ordering. Influence of medium weight on power, effects and requirements of medium corrosivity and friction on over-current seals, should be taken into consideration when selecting the model.
2. Special requirements for safety protection inside the pump (oil-water probe, water inlet probe, thermal element, etc.) must be stated or indicated when ordering. Control method and automation requirements should be indicated when the electric control cabinet is ordered as well.
3. Standard configuration cable length is 9meters, please start from 15meters (increase by multiple 5 meters), if you need other lengths.
4. Please indicate start mode of the pump when ordering. The standard form is: direct starting for 37kW and below, star delta starting for 45kW and above. The direct starting model draws UVW from the inside of the pump, and the star-delta model draws U1V1W1, U2V2W2 from the inside of the pump.
5. 11kW and above are recommended to use the inverter, auto-coupling or soft starter to start the pump when the star-delta startup is not used.
6. The pressure level of the water pump outlet is PN6.